



Linear accelerometers in QFPN package
surface mounting guidelines

Abstract

This document is a general guidelines about soldering accelerometer products packaged in **Quad Flat Package No lead** surface mount.

Contents

- 1 General guidelines about soldering surface mount accelerometer . . . 3**
- 2 PCB design guidelines 4**
 - 2.1 PCB design rules 4
- 3 Stencil design & solder paste application 5**
- 4 Process consideration 6**
- 5 Solder heat resistance and environmental specification 7**
- Appendix A QFPN packages outlines. 8**
 - A.1 QFPN 7x7x1.8mm, pitch 0.80, 28 land 8
 - A.2 QFPN 7x7x1.8mm, pitch 0.50, 44 land 9
- 6 Revision history 10**

1 **General guidelines about soldering surface mount accelerometer**

As common PCB design and industrial practice when considering accelerometer soldering there are always 3 elements to take into consideration:

1. PCB with its own conductive layers (i.e. Copper) and other organic materials used for board protection and dielectric isolation.
2. ACCELEROMETER to be mounted on the board. Accelerometer senses acceleration, but it senses also the mechanical stress coming from the board. This stress is minimized with simple PCB design rules.
3. SOLDERING PASTE like SnAgCu. This soldering paste can be dispensed on the board with a screen printing method through a stencil. The pattern of the soldering paste on the PCB is given by the stencil mask itself.


2 PCB design guidelines

PCB land and solder masking general recommendations are shown in *Figure 1*. Refer to device datasheet or appendix A for land count, size and pitch.

- It is recommended to open solder mask external to PCB land;
- It's mandatory for correct device functionality that some clearance is ensured to be present between accelerometer thermal pad and PCB. In order to obtain this clearance it is recommended to open the PCB thermal pad solder mask;
- The area below the sensor (on the same side of the board) must be defined as keep-out area. It is strongly recommended to not place any structure in top metal layer underneath the sensor;
- Traces connected to pads should be as much symmetric as possible. Symmetry and balance for pad connection will help component self alignment and will lead to a better control of solder paste reduction after reflow;
- For better performances over temperature it is strongly recommended not to place large insertion components like buttons or shielding boxes at distance less than 2 mm from the sensor;
- Pin #1 indicator is electrically connected to pin 1. Leave pin 1 indicator unconnected during soldering.

2.1 PCB design rules

Figure 1. Recommended land and solder mask design for QFPN packages.

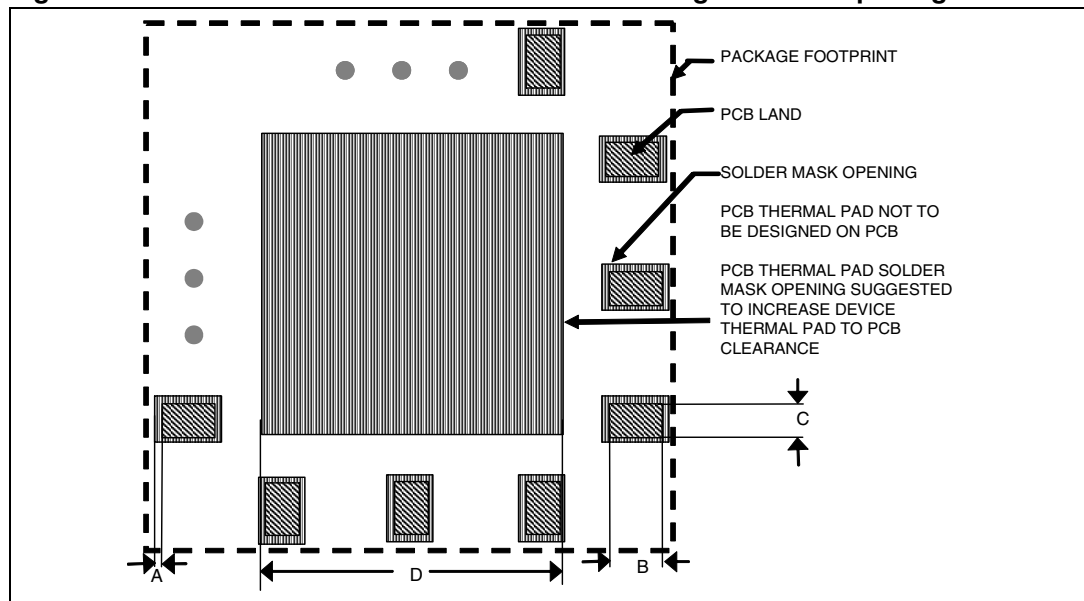

A = Clearance from PCB land edge to solder mask opening $\leq 0.1\text{mm}$ to ensure that some solder mask remains between PCB pads

B = PCB land length = QFPN solder pad length + 0.1mm

C = PCB land width = QFPN solder pad width + 0.1mm

D = PCB thermal pad solder mask opening = QFPN thermal pad side + 0.2mm

3 Stencil design & solder paste application

The thickness and the pattern of the soldering paste are important for the proper accelerometer mounting process

- Stainless steel stencils are recommended for solder paste application;
- A stencil thickness of 125 - 150 μ m (5 - 6 mils) is recommended for screen printing;
- The final thickness of soldering paste should allow proper cleaning of flux residuals and clearance between sensor package and PCB;
- Stencil aperture should have rectangular shape with dimension up to 25 μ m (1mil) smaller than PCB land;
- The openings of the stencil for the signal pads should be between 50% and 80% of the PCB pad area;
- Optionally, for better solder paste release, the aperture walls should be trapezoidal and the corners rounded;
- The fine pitch of the IC leads requires accurate alignment of the stencil to the printed circuit board. The stencil and printed circuit assembly should be aligned to within 25 μ m (1mil) prior to application of the solder paste.

4 Process consideration

- In case of use of no self-cleaning solder paste it is mandatory proper washing of the board after soldering to eliminate any possible source of leakage between adjacent pads due to flux residues;
- The PCB soldering profile depends on the number, size and placement of components in the application board. It is not functional to define a specific soldering profile for the accelerometer only. Customer should use a time and temperature reflow profile that is derived from the PCB design and manufacturing experience.

5 Solder heat resistance and environmental specification

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a Lead-free second level interconnect. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label.


QFN packages for accelerometer are qualified for soldering heat resistance according to JEDEC J-STD-020C, in MSL3 condition.

ECOPACK® is an ST trademark.

Appendix A QFPN packages outlines


A.1 QFPN 7x7x1.8mm, pitch 0.80, 28 land

Figure 2. QFPN 7x7x1.8mm, pitch 0.80, 28 land

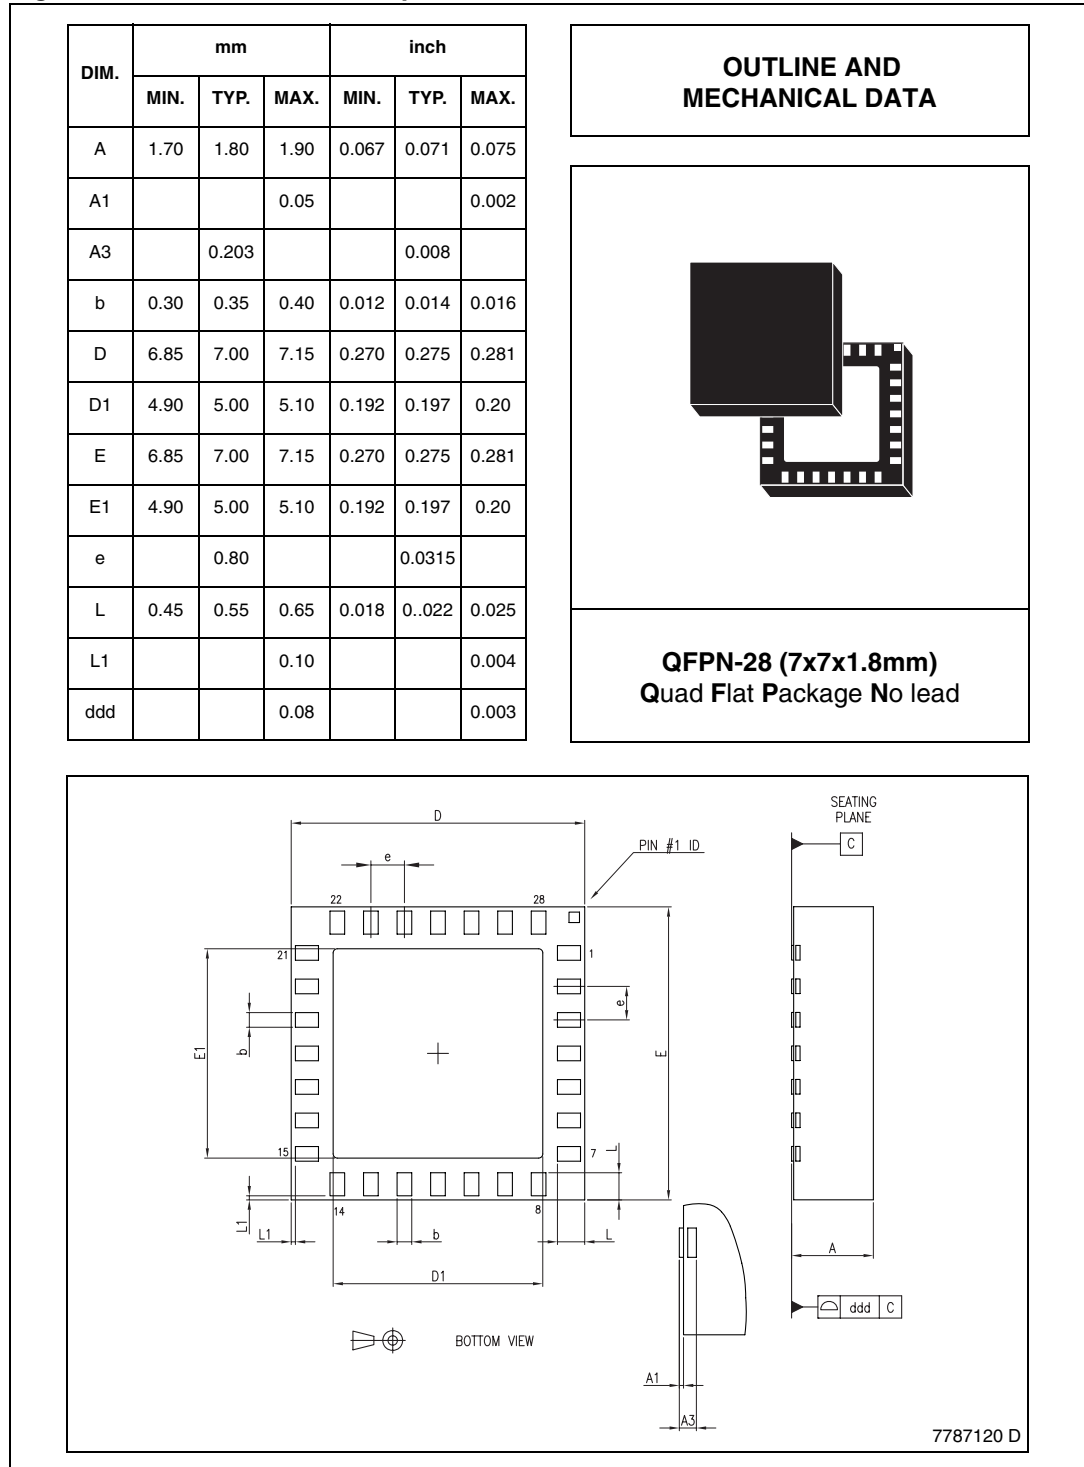

A.2 QFPN 7x7x1.8mm, pitch 0.50, 44 land

Figure 3. QFPN 7x7x1.8mm, pitch 0.50, 44 land

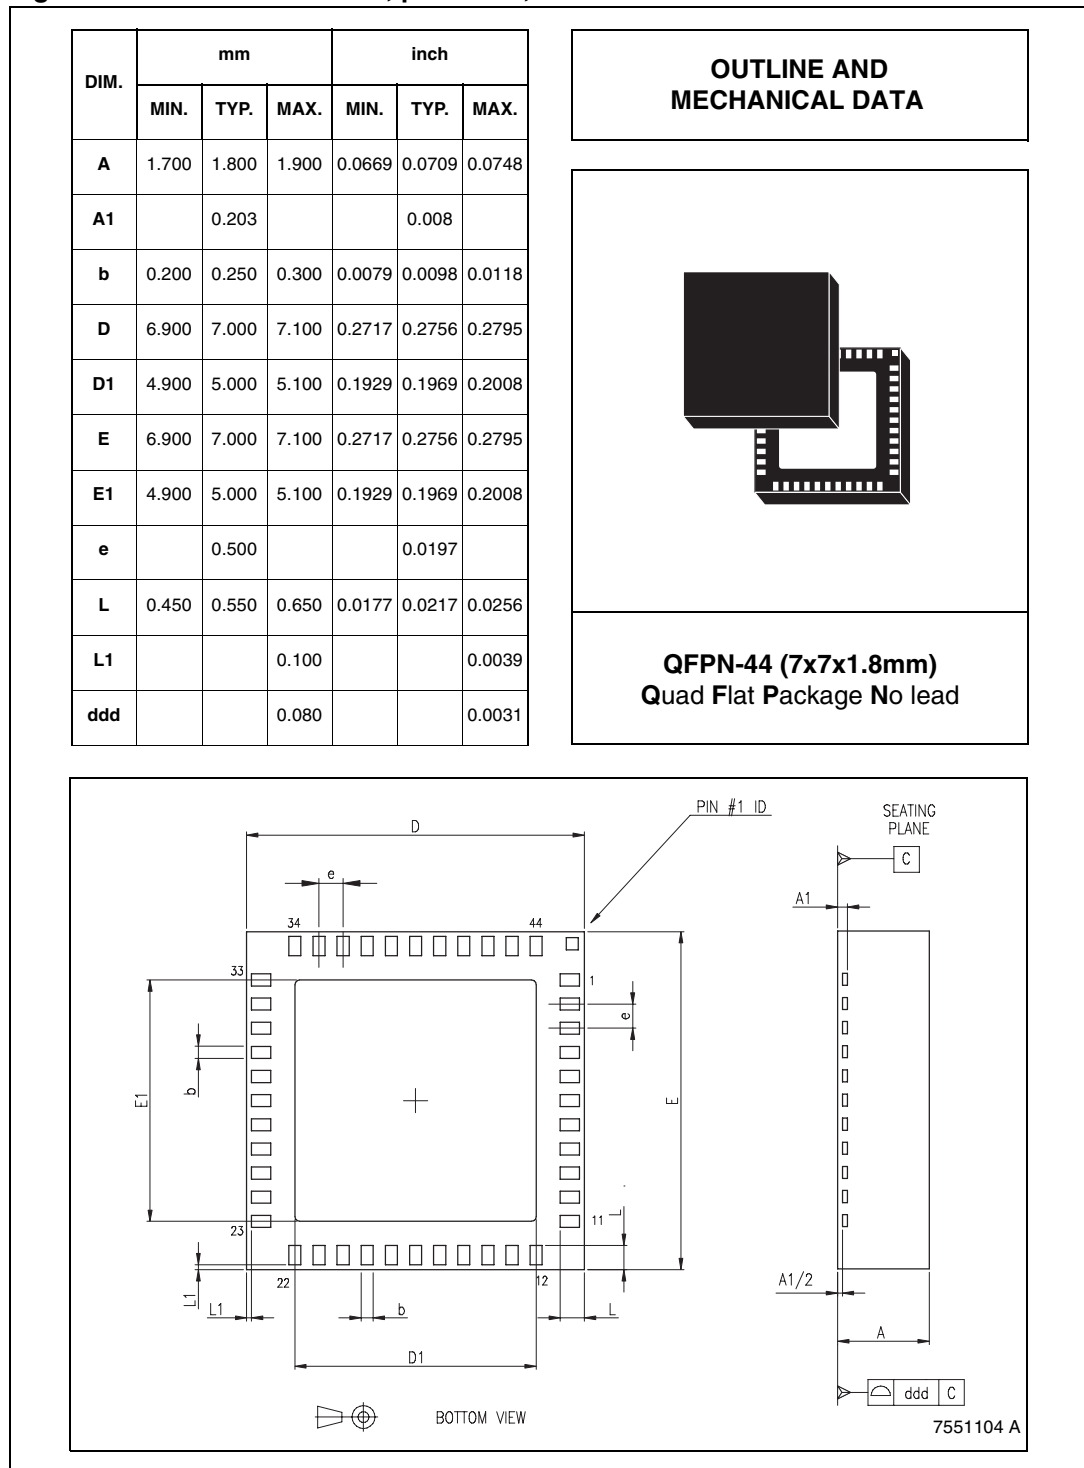

6 Revision history

Table 1. Document revision history

Date	Revision	Changes
8-Nov-2006	1	Initial release.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2006 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

