



1 Introduction

For designers of STM32 microcontroller applications, it is important to be able to easily replace one microcontroller type by another one in the same product family. Migrating an application to a different microcontroller is often needed, when product requirements grow, putting extra demands on memory size, or increasing the number of I/Os. On the other hand, cost reduction objectives may force you to switch to smaller components and shrink the PCB area.

This application note is written to help you and analyze the steps you need to migrate from an existing STM32F1 devices based design to STM32F2 devices. It groups together all the most important information and lists the vital aspects that you need to address.

To migrate your application from STM32 F1 series to F2 series, you have to analyze the hardware migration, the peripheral migration and the firmware migration.

To benefit fully from the information in this application note, the user should be familiar with the STM32 microcontroller family. Available from www.st.com.

- The STM32F1 family reference manuals (RM0008 and RM0041), the STM32F1 datasheets, and the STM32F1 Flash programming manuals (PM0075, PM0063 and PM0068).
- The STM32F2 family reference manual (RM0033), the STM32F2 datasheets, and the STM32F2 Flash programming manual (PM0059).

For an overview of the whole STM32 series and a comparison of the different features of each STM32 product series, please refer to AN3364 'Migration and compatibility guidelines for STM32 microcontroller applications'

Contents

- 1 Introduction 1**
- 2 Hardware migration 6**
- 3 Peripheral migration 9**
 - 3.1 STM32 product cross-compatibility 9
 - 3.2 System architecture 12
 - 3.2.1 32-bit multi-AHB bus matrix 12
 - 3.2.2 Adaptive real-time memory accelerator (ART Accelerator™) 12
 - 3.2.3 Dual SRAM 13
 - 3.3 Memory mapping 13
 - 3.4 RCC 16
 - 3.5 DMA 23
 - 3.5.1 Interrupts 26
 - 3.6 GPIO 29
 - 3.6.1 Alternate function mode 30
 - 3.7 EXTI source selection 31
 - 3.8 FLASH 31
 - 3.9 ADC 33
 - 3.10 PWR 35
 - 3.11 RTC 36
 - 3.12 Miscellaneous 37
 - 3.12.1 Ethernet PHY interface selection 37
 - 3.12.2 TIM2 internal trigger 1 (ITR1) remapping 37
- 4 Firmware migration using the library 38**
 - 4.1 Migration steps 38
 - 4.2 RCC 38
 - 4.3 FLASH 40
 - 4.4 GPIO 43
 - 4.4.1 Output mode 43
 - 4.4.2 Input mode 43
 - 4.4.3 Analog mode 43

| | | |
|----------|--|-----------|
| 4.4.4 | Alternate function mode | 43 |
| 4.5 | EXTI | 45 |
| 4.6 | DMA | 46 |
| 4.7 | ADC | 47 |
| 4.8 | Backup data registers | 49 |
| 4.9 | Miscellaneous | 49 |
| 4.9.1 | Ethernet PHY interface selection | 49 |
| 4.9.2 | TIM2 internal trigger 1 (ITR1) remapping | 50 |
| 5 | Revision history | 51 |

List of tables

| | | |
|-----------|--|----|
| Table 1. | STM32 F1 series and STM32 F2 series pinout differences | 6 |
| Table 2. | STM32 peripheral compatibility analysis F1 versus F2 series | 9 |
| Table 3. | IP bus mapping differences between STM32 F1 and STM32 F2 series. | 13 |
| Table 4. | RCC differences between STM32 F1 and STM32 F2 series | 16 |
| Table 5. | Example of migrating system clock configuration code from F1 to F2 series. | 20 |
| Table 6. | RCC registers used for peripheral access configuration. | 21 |
| Table 7. | DMA request differences between STM32 F1 series and STM32 F2 series | 23 |
| Table 8. | Interrupt vector differences between STM32 F1 series and STM32 F2 series. | 27 |
| Table 9. | GPIO differences between STM32 F1 series and STM32 F2 series | 30 |
| Table 10. | FLASH differences between STM32 F1 series and STM32 F2 series | 32 |
| Table 11. | ADC differences between STM32 F1 series and STM32 F2 series | 33 |
| Table 12. | PWR differences between STM32 F1 series and STM32 F2 series. | 35 |
| Table 13. | STM32F10x and STM32F2xx FLASH driver API correspondence. | 41 |
| Table 14. | Document revision history | 51 |

List of figures

| | | |
|-----------|---|----|
| Figure 1. | Compatible board design: LQFP144 | 7 |
| Figure 2. | Compatible board design: LQFP100 | 7 |
| Figure 3. | Compatible board design: LQFP64 | 8 |
| Figure 4. | STM32 F2 series system architecture | 12 |

2 Hardware migration

All peripherals shares the same pins in the two families, but there are some minor differences between packages.

In fact, the STM32 F2 series maintains a close compatibility with the whole STM32 F1 series. All functional pins are pin-to-pin compatible. The STM32 F2 series, however, are not drop-in replacements for the STM32 F1 series: the two families do not have the same power scheme, and so their power pins are different. Nonetheless, transition from the STM32 F1 series to the STM32 F2 series remains simple as only a few pins are impacted (impacted pins are in bold in the table below).

Table 1. STM32 F1 series and STM32 F2 series pinout differences

| STM32 F1 series | | | | STM32 F2 series | | | |
|-----------------|--------|--------|----------------------|-----------------|--------|--------|----------------------|
| QFP64 | QFP100 | QFP144 | Pinout | QFP64 | QFP100 | QFP144 | Pinout |
| 5 | 12 | 23 | PD0 - OSC_IN | 5 | 12 | 23 | PH0 - OSC_IN |
| 6 | 13 | 24 | PD1 - OSC_OUT | 6 | 13 | 24 | PH1 - OSC_OUT |
| 12 | 19 | 30 | VSSA | | 19 | 30 | VDD |
| | 20 | 31 | VREF- | 12 | 20 | 31 | VSSA |
| 31 | 49 | 71 | VSS_1 | 31 | 49 | 71 | VCAP1 |
| | 73 | 106 | NC | 47 | 73 | 106 | VCAP2 |
| 47 | 74 | 107 | VSS_2 | | 74 | 107 | VSS2 |
| 63 | 99 | 143 | VSS_3 | 63 | | | VSS_3 |

The figures below show examples of board designs that are compatible with both the F1 and the F2 series.

Figure 1. Compatible board design: LQFP144

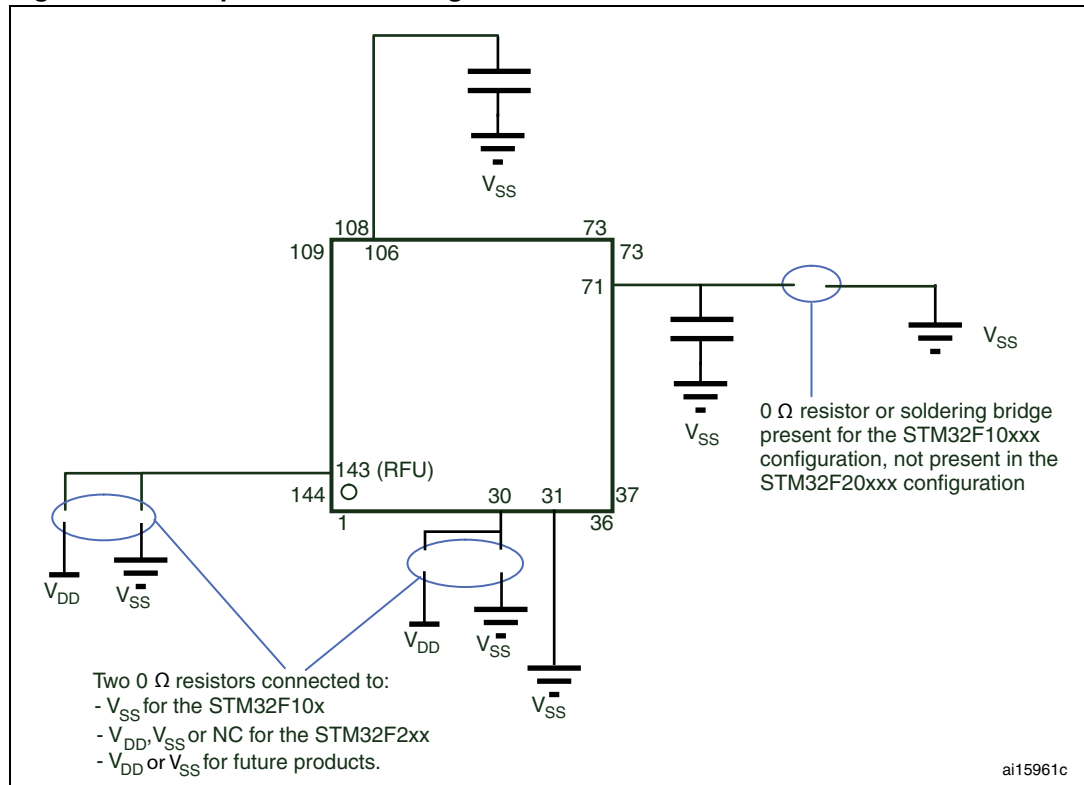


Figure 2. Compatible board design: LQFP100


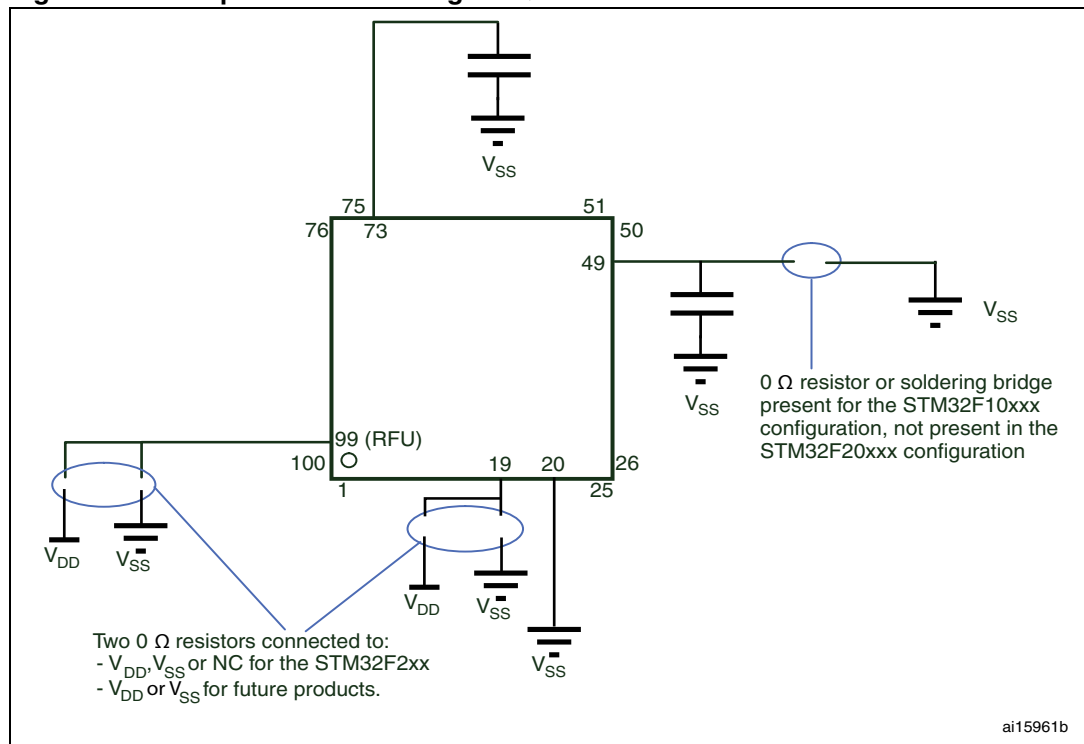


Figure 3. Compatible board design: LQFP64

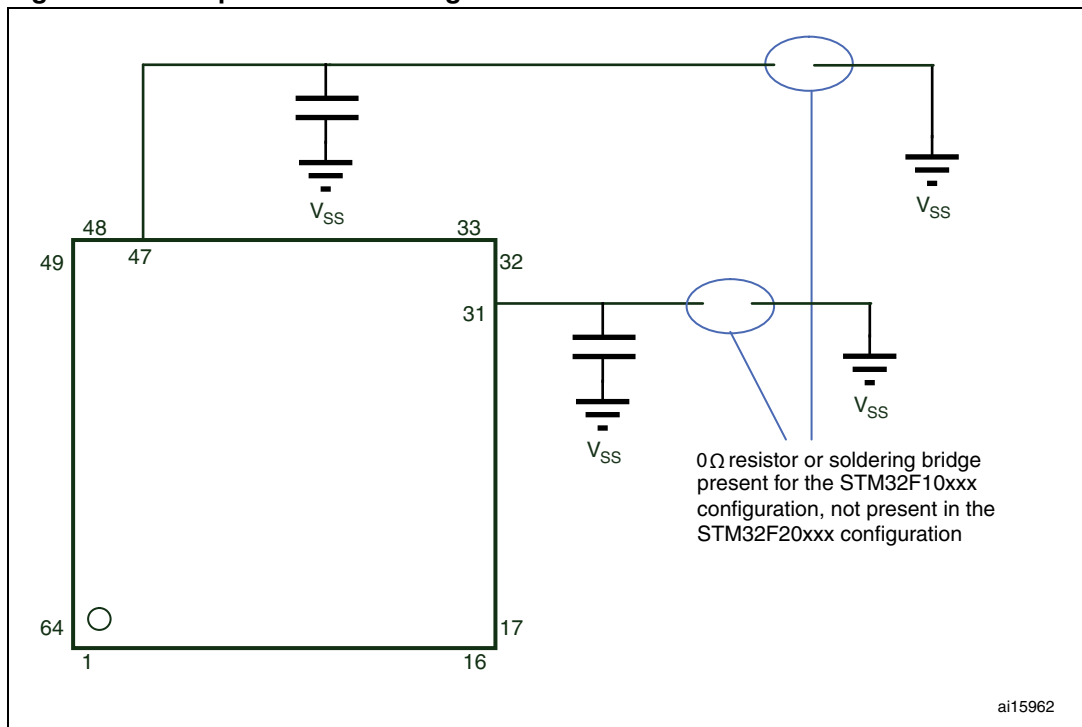

3 Peripheral migration

As shown in [Table 2 on page 9](#), there are three categories of peripherals. The common peripherals are supported with the dedicated firmware library without any modification, except if the peripheral instance is no longer present, you can change the instance and of course all the related features (clock configuration, pin configuration, interrupt/DMA request).

The modified peripherals such as: FLASH, ADC, RCC, DMA, GPIO and RTC are different from the F1 series ones and should be updated to take advantage of the enhancements and the new features in F2 series.

All these modified peripherals in the F2 series are enhancements in performance and features designed to meet new market requirements and to fix some limitations present in the F1 series.

3.1 STM32 product cross-compatibility

The STM32 series embeds a set of peripherals which can be classed in three categories:

- The first category is for the peripherals which are by definition common to all products. Those peripherals are identical, so they have the same structure, registers and control bits. There is no need to perform any firmware change to keep the same functionality at the application level after migration. All the features and behavior remain the same.
- The second category is for the peripherals which are shared by all products but have only minor differences (in general to support new features), so migration from one product to another is very easy and does not need any significant new development effort.
- The third category is for peripherals which have been considerably changed from one product to another (new architecture, new features...). For this category of peripherals, migration will require new development at application level.

[Table 2](#) below gives a general overview of this classification:

Table 2. STM32 peripheral compatibility analysis F1 versus F2 series

| Peripheral | F1 series | F2 series | Compatibility | | |
|---------------|-----------|-----------|---------------|-----------|--------------------|
| | | | Comments | Pinout | SW compatibility |
| FSMC | Yes | Yes | Same features | Identical | Full compatibility |
| WWDG | Yes | Yes | Same features | NA | Full compatibility |
| IWDG | Yes | Yes | Same features | NA | Full compatibility |
| DBGMCU | Yes | Yes | Same features | NA | Full compatibility |
| CRC | Yes | Yes | Same features | NA | Full compatibility |
| EXTI | Yes | Yes | Same features | Identical | Full compatibility |
| CAN | Yes | Yes | Same features | Identical | Full compatibility |




Table 2. STM32 peripheral compatibility analysis F1 versus F2 series (continued)

| Peripheral | F1 series | F2 series | Compatibility | | |
|------------------------------|-----------|-----------|---|--------------------------------|---|
| | | | Comments | Pinout | SW compatibility |
| PWR | Yes | Yes+ | Enhancement | NA | Full compatibility for the same feature |
| RCC | Yes | Yes+ | Enhancement | NA | Partial compatibility |
| SPI | Yes | Yes+ | TI mode / Max baudrate | Identical | Full compatibility for the same feature |
| USART | Yes | Yes+ | Limitation fix / Max baudrate / One Sample Bit / Oversampling by 8 | Identical | Full compatibility for the same feature |
| I2C | Yes | Yes+ | Limitation fix | Identical | Full compatibility for the same feature |
| TIM | Yes | Yes+ | 32-bit Counter in TIM2 and TIM5 | Identical | Full compatibility for the same feature |
| DAC | Yes | Yes+ | DMA underrun interrupt | Identical | Full compatibility for the same feature |
| Ethernet | Yes | Yes+ | IEEE1588 v2 / Enhanced DMA descriptor | Identical | Full compatibility for the same feature |
| SDIO | Yes | Yes+ | Limitation fix | Identical | Full compatibility for the same feature |
| USB OTG FS | Yes | Yes+ | - Dynamic trimming capability of SOF framing period in Host mode - Embeds a VBUS sensing control | Identical | Full compatibility for the same feature |
| RTC | Yes | Yes++ | New peripheral | Identical for the same feature | Not compatible |
| ADC | Yes | Yes++ | New peripheral | Identical for the same feature | Partial compatibility |
| FLASH | Yes | Yes++ | New peripheral | NA | Not compatible |
| DMA | Yes | Yes++ | New peripheral | NA | Not compatible |
| GPIO | Yes | Yes++ | New peripheral | Identical | Not compatible |
| CEC | Yes | NA | NA | NA | NA |
| USB FS Device | Yes | NA | NA | NA | NA |
| Crypto/hash processor | NA | Yes | NA | NA | NA |
| RNG | NA | Yes | NA | NA | NA |
| DCMI | NA | Yes | NA | NA | NA |

Table 2. STM32 peripheral compatibility analysis F1 versus F2 series (continued)

| Peripheral | F1 series | F2 series | Compatibility | | |
|------------|-----------|-----------|---------------|--------|------------------|
| | | | Comments | Pinout | SW compatibility |
| USB OTG HS | NA | Yes | NA | NA | NA |
| SYSCFG | NA | Yes | NA | NA | NA |

Color key:

-  = New feature or new architecture (Yes++)
-  = Same feature, but specification change or enhancement (Yes+)
-  = Feature not available (NA)


3.2 System architecture

STM32 F2 series are a new generation on STM32 with significant improvement in features and performance with outstanding results: 150DMIPS at 120MHz and execution from Flash equivalent to 0-wait state performance.

3.2.1 32-bit multi-AHB bus matrix

The 32-bit multi-AHB bus matrix interconnects all masters (CPU, DMA controllers, Ethernet, USB HS) and slaves (Flash memory, 2 blocks of RAM, FSMC, AHB and APB peripherals) and ensures seamless and efficient operation even when several high-speed peripherals are working simultaneously. For instance, the core can access the Flash through the ART Accelerator and the 112-Kbyte SRAM, while the DMA2 controller is transferring data from the camera interface located on the AHB2 peripheral bus to an LCD connected to the FSMC, and while the USB OTG High Speed interface is storing received data in the 16-Kbyte SRAM block.

Figure 4. STM32 F2 series system architecture

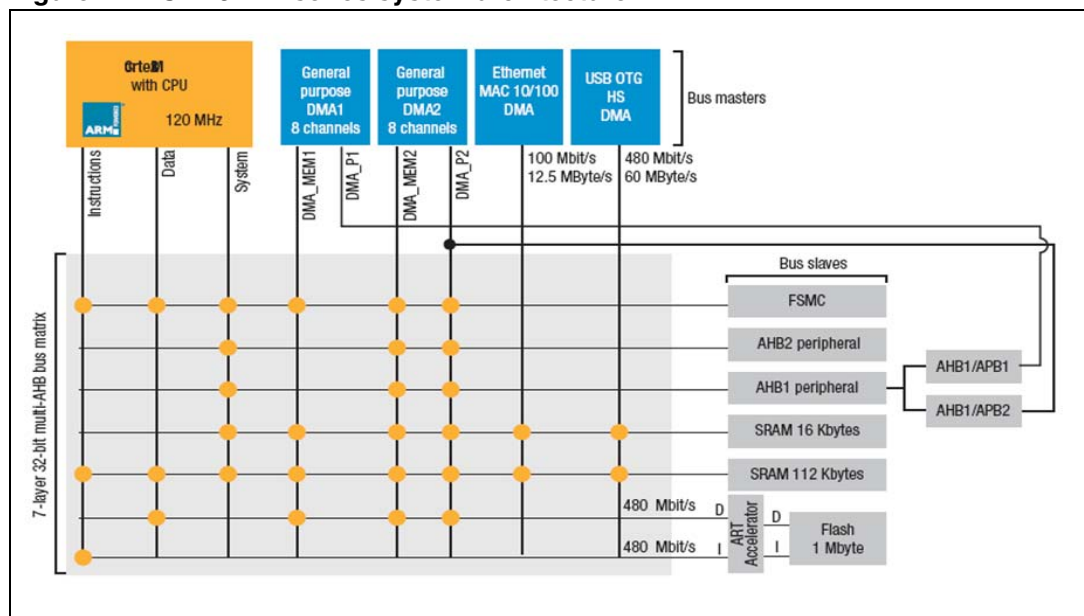

3.2.2 Adaptive real-time memory accelerator (ART Accelerator™)

To free the full performance of the Cortex-M3 core, ST has developed a leading-edge 90 nm process and a unique technology, the adaptive real-time ART Accelerator™. To release the processor full 150 DMIPS performance at this frequency, the accelerator implements an instruction prefetch queue and branch cache which increases program execution speed from the 128-bit Flash memory. Based on the CoreMark benchmark, the performance achieved thanks to the ART accelerator is equivalent to 0 wait state program execution from Flash memory at a CPU frequency up to 120 MHz.

By default (after each device reset) the prefetch queue and branch cache are disabled, the user can enable them using the PRFTEN, ICEN and DCEN bits in the FLASH_ACR register.

3.2.3 Dual SRAM

The 128KB of SRAM is made of 2 blocks; one 112KB and one 16KB. Both can be accessed simultaneously by 2 masters in 0 WS (CPU, DMAs, Ethernet, USB HS).

The 16KB SRAM can be used as a buffer for high speed peripherals like USB-HS, Ethernet, Camera, without impacting the CPU performance.

3.3 Memory mapping

The peripheral address mapping has been changed in the F2 series vs. F1 series, the main change concerns the GPIOs which have been moved to the AHB bus instead of the APB bus to allow them to operate at maximum speed.

The tables below provide the peripheral address mapping correspondence between F2 and F1 series.

Table 3. IP bus mapping differences between STM32 F1 and STM32 F2 series

| Peripheral | STM32 F2 series | | STM32 F1 series | |
|----------------|-----------------|--------------|-----------------|--------------|
| | Bus | Base address | Bus | Base address |
| FSMC Registers | AHB3 | 0xA0000000 | AHB | 0xA0000000 |
| RNG | AHB2 | 0x50060800 | NA | NA |
| HASH | | 0x50060400 | NA | NA |
| CRYP | | 0x50060000 | NA | NA |
| DCMI | | 0x50050000 | NA | NA |
| USB OTG FS | | 0x50000000 | AHB | 0x50000000 |

Table 3. IP bus mapping differences between STM32 F1 and STM32 F2 series

| Peripheral | STM32 F2 series | | STM32 F1 series | |
|-----------------|-----------------|--------------|-----------------|--------------|
| | Bus | Base address | Bus | Base address |
| USB OTG HS | AHB1 | 0x40040000 | NA | NA |
| ETHERNET MAC | | 0x40028000 | AHB | 0x40028000 |
| DMA2 | | 0x40026400 | | 0x40020400 |
| DMA1 | | 0x40026000 | 0x40020000 | |
| BKPSRAM | | 0x40024000 | NA | NA |
| Flash interface | | 0x40023C00 | AHB | 0x40022000 |
| RCC | | 0x40023800 | | 0x40021000 |
| CRC | | 0x40023000 | | 0x40023000 |
| GPIO I | | 0x40022000 | NA | NA |
| GPIO H | | 0x40021C00 | NA | NA |
| GPIO G | | 0x40021800 | APB2 | 0x40012000 |
| GPIO F | | 0x40021400 | | 0x40011C00 |
| GPIO E | | 0x40021000 | | 0x40011800 |
| GPIO D | | 0x40020C00 | | 0x40011400 |
| GPIO C | | 0x40020800 | | 0x40011000 |
| GPIO B | | 0x40020400 | | 0x40010C00 |
| GPIO A | | 0x40020000 | | 0x40010800 |
| TIM11 | | 0x40014800 | | 0x40015400 |
| TIM10 | | APB2 | 0x40014400 | 0x40015000 |
| TIM9 | | | 0x40014000 | 0x40014C00 |
| EXTI | 0x40013C00 | | 0x40010400 | |


Table 3. IP bus mapping differences between STM32 F1 and STM32 F2 series


| Peripheral | STM32 F2 series | | STM32 F1 series | |
|--------------------|------------------------------------|--------------|-----------------|---|
| | Bus | Base address | Bus | Base address |
| SYSCFG | APB2 | 0x40013800 | NA | NA |
| SPI1 | | 0x40013000 | APB2 | 0x40013000 |
| SDIO | | 0x40012C00 | AHB | 0x40018000 |
| ADC1 - ADC2 - ADC3 | | 0x40012000 | APB2 | ADC3 - 0x40013C00 ADC2 - 0x40012800 ADC1 - 0x40012400 |
| USART6 | | 0x40011400 | NA | NA |
| USART1 | | 0x40011000 | APB2 | 0x40013800 |
| TIM8 | | 0x40010400 | | 0x40013400 |
| TIM1 | | 0x40010000 | | 0x40012C00 |
| DAC | | 0x40007400 | APB1 | 0x40007400 |
| PWR | | 0x40007000 | | 0x40007000 |
| CAN2 | 0x40006800 | 0x40006800 | | |
| CAN1 | 0x40006400 | 0x40006400 | | |
| I2C3 | 0x40005C00 | NA | NA | |
| I2C2 | 0x40005800 | APB1 | 0x40005800 | |
| I2C1 | 0x40005400 | | 0x40005400 | |
| UART5 | 0x40005000 | | 0x40005000 | |
| UART4 | 0x40004C00 | | 0x40004C00 | |
| USART3 | 0x40004800 | | 0x40004800 | |
| USART2 | 0x40004400 | | 0x40004400 | |
| SPI3 / I2S3 | 0x40003C00 | | 0x40003C00 | |
| SPI2 / I2S2 | 0x40003800 | | 0x40003800 | |
| IWDG | 0x40003000 | | 0x40003000 | |
| WWDG | 0x40002C00 | | APB1 | 0x40002C00 |
| RTC | 0x40002800 (inc. BKP registers) | APB1 | 0x40002800 | |
| TIM14 | 0x40002000 | | 0x40002000 | |
| TIM13 | 0x40001C00 | | 0x40001C00 | |
| TIM12 | 0x40001800 | | 0x40001800 | |
| TIM7 | 0x40001400 | | 0x40001400 | |
| TIM6 | 0x40001000 | | 0x40001000 | |
| TIM5 | 0x40000C00 | | 0x40000C00 | |
| TIM4 | 0x40000800 | | 0x40000800 | |

Table 3. IP bus mapping differences between STM32 F1 and STM32 F2 series

| Peripheral | STM32 F2 series | | STM32 F1 series | |
|---------------|-----------------|--------------|-----------------|--------------|
| | Bus | Base address | Bus | Base address |
| TIM3 | APB1 | 0x40000400 | APB1 | 0x40000400 |
| TIM2 | | 0x40000000 | | 0x40000000 |
| BKP registers | NA | NA | | 0x40006C00 |
| USB device FS | NA | NA | | 0x40005C00 |
| AFIO | NA | NA | APB2 | 0x40001000 |

Color key:

 = Same feature, but base address change

 = Feature not available (NA)

3.4 RCC

The main differences related to the RCC (Reset and Clock Controller) in the STM32 F2 series vs. STM32 F1 series are presented in the table below.

Table 4. RCC differences between STM32 F1 and STM32 F2 series

| RCC main features | STM32 F1 series | STM32 F2 series | Comments |
|-------------------|--|---------------------------|--|
| HSI | 8 MHz RC factory-trimmed | 16 MHz RC factory-trimmed | No change to SW configuration: – Enable/disable RCC_CR[HSION] – Status flag RCC_CR[HSIRDY] |
| LSI | 40 KHz RC | 32 KHz RC | No change to SW configuration: – Enable/disable RCC_CSR[LSION] – Status flag RCC_CSR[LSIRDY] |
| HSE | 3 - 25 MHz Depending on the product line used | 4 - 26MHz | No change to SW configuration: – Enable/disable RCC_CR[HSEON] – Status flag RCC_CR[HSERDY] |
| LSE | 32.768 KHz | 32.768 kHz | No change to SW configuration: – Enable/disable RCC_BDCR[LSEON] – Status flag RCC_BDCR[LSERDY] |

Table 4. RCC differences between STM32 F1 and STM32 F2 series

| RCC main features | STM32 F1 series | STM32 F2 series | Comments |
|------------------------|--|--|--|
| PLL | <ul style="list-style-type: none"> – <i>Connectivity line</i>: main PLL + 2 PLLs for I2S, Ethernet and OTG FS clock – <i>Other product lines</i>: main PLL | <ul style="list-style-type: none"> – Main PLL for system, OTG FS, SDIO and RNG clock – Dedicated PLL for I2S clock | There is no change to PLL enable/disable RCC_CR[PLLON] and status flag RCC_CR[PLLRDY]. However, PLL configuration (clock source selection, multiplication/division factors) are different. In F2 series a dedicated register RCC_PLLCFGR is used to configure the PLL parameters. |
| System clock source | HSI, HSE or PLL | HSI, HSE or PLL | No change to SW configuration: <ul style="list-style-type: none"> – Selection bits RCC_CFGR[SW] – Status flag RCC_CFGR[SWS] |
| System clock frequency | up to 72 MHz depending on the product line used 8 MHz after reset using HSI | 120 MHz 16 MHz after reset using HSI | For STM32 F2, Flash wait states must be adapted to the system frequency depending on the supply voltage range. |
| AHB frequency | up to 72 MHz | up to 120 MHz | No change to SW configuration: configuration bits RCC_CFGR[HPRE] |
| APB1 frequency | up to 36 MHz | up to 30 MHz | No change to SW configuration: configuration bits RCC_CFGR[PPRE1]. In F2 series the PPRE1 bits occupy bits [10:12], instead of bits [8:10] in F1 series. |
| APB2 frequency | up to 72 MHz | up to 60 MHz | No change to SW configuration: configuration bits RCC_CFGR[PPRE2]. In F2 series the PPRE2 bits occupy bits [13:15] of the register, instead of bits [11:13] in F1 series. |
| RTC clock source | LSI, LSE or HSE/128 | LSI, LSE or HSE clock divided by 2 to 31 | RTC clock source configuration is done through the same bits RCC_BDCR[RTCSEL] and RCC_BDCR[RTCEN]. However, in F2 series when HSE is selected as RTC clock source, additional bits are used in CFGFR register, RCC_CFGR[RTCPRE], to select the division factor to be applied on HSE clock. |

Table 4. RCC differences between STM32 F1 and STM32 F2 series

| RCC main features | STM32 F1 series | STM32 F2 series | Comments |
|--|--|--|--|
| MCO clock source | <ul style="list-style-type: none"> - MCO pin (PA8) - <i>Connectivity Line</i>: HSI, HSE, PLL/2, SYSCLK, PLL2, PLL3 or XT1 - <i>Other product lines</i>: HSI, HSE, PLL/2 or SYSCLK | <ul style="list-style-type: none"> - <u>MCO1 pin (PA8)</u>: HSI, HSE, LSE or PLL - <u>MCO2 pin (PC9)</u>: PLLI2S, PLL, HSE or SYSCLK - With configurable prescaler, from 1 to 5, for each output. | <p>MCO configuration in F2 series is different from F1:</p> <ul style="list-style-type: none"> - For MCO1, the prescaler is configured through bits RCC_CFGR[MCO1PRE] and the selection of the clock to output through bits RCC_CFGR[MCO1] - For MCO2, the prescaler is configured through bits RCC_CFGR[MCO2PRE] and the selection of the clock to output through bits RCC_CFGR[MCO2] |
| Internal oscillator measurement / calibration | <ul style="list-style-type: none"> - LSI connected to TIM5 CH4 IC: can measure LSI w/ respect to HSI/HSE clock | <ul style="list-style-type: none"> - LSI connected to TIM5 CH4 IC: can measure LSI w/ respect to HSI/HSE clock - LSE connected to TIM5 CH4 IC: can measure HSI w/ respect to LSE clock - HSE connected to TIM11 CH1 IC: can measure HSE range w/ respect to HSI clock | There is no configuration to perform in RCC registers. |
| Interrupt | <ul style="list-style-type: none"> - CSS (linked to NMI IRQ) - LSIRDY, LSERDY, HSIRDY, HSERDY, PLLRDY, <u>PLL2RDY</u> and <u>PLL3RDY</u> (linked to RCC global IRQ) | <ul style="list-style-type: none"> - CSS (linked to IRQ) - LSIRDY, LSERDY, HSIRDY, HSERDY, PLLRDY and <u>PLL2SRDY</u> (linked to RCC global IRQ) | No change on SW configuration: interrupt enable, disable and pending bits clear are done in RCC_CIR register. |

In addition to the differences described in the table above, the following additional steps need to be performed during the migration:

1. System clock configuration: when moving from F1 series to F2 series only a few settings need to be updated in the system clock configuration code; mainly the Flash settings (configure the right wait states for the system frequency, prefetch enable/disable,...) or/and the PLL parameters configuration:
 - a) If the HSE or HSI is used directly as system clock source, in this case only the Flash parameters should be modified.
 - b) If PLL (clocked by HSE or HSI) is used as system clock source, in this case the Flash parameters and PLL configuration need to be updated.

Table 5. below provides an example of porting a system clock configuration from F1 to F2 series:

- STM32F105/7 Connectivity Line running at maximum performance: system clock at 72 MHz (PLL, clocked by the HSE, used as system clock source), Flash with 2 wait states and Flash prefetch queue enabled.
- F2 series running at maximum performance: system clock at 120 MHz (PLL, clocked by the HSE, used as system clock source), Flash with 3 wait states, Flash prefetch queue and branch cache enabled.

As shown in the table below, only the Flash settings and PLL parameters (code in ***Bold Italic***) need to be rewritten to run on F2 series. However, HSE, AHB prescaler and system clock source configuration are left unchanged, and the APB's prescalers are adapted to the maximum APB frequency in the F2 series.

- Note:*
- 1 *The source code presented in the table below is intentionally simplified (time-out in wait loop removed) and is based on the assumption that the RCC and Flash registers are at their reset values.*
 - 2 *For STM32F2xx you can use the clock configuration tool, STM32F2xx_Clock_Configuration.xls, to generate a customized system_stm32f2xx.c file containing a system clock configuration routine, that you adapt to your application requirements. For more information, refer to AN3362 "Clock configuration tool for STM32F2xx microcontrollers"*

Table 5. Example of migrating system clock configuration code from F1 to F2 series

| STM32F105/7 running at 72 MHz (PLL as clock source) with 2 wait state | STM32F2xx running at 120 MHz (PLL as clock source) with 3 wait state |
|---|---|
| <pre> /* Enable HSE -----*/ RCC->CR = ((uint32_t)RCC_CR_HSEON); /* Wait till HSE is ready */ while((RCC->CR & RCC_CR_HSERDY) == 0) { } /* Flash configuration -----*/ /* Prefetch ON, Flash 2 wait state */ FLASH->ACR = FLASH_ACR_PRFTBE FLASH_ACR_LATENCY_2; /* AHB and APBs prescaler configuration --*/ /* HCLK = SYSCLK */ RCC->CFGR = RCC_CFGR_HPRE_DIV1; /* PCLK2 = HCLK */ RCC->CFGR = RCC_CFGR_PPRE2_DIV1; /* PCLK1 = HCLK */ RCC->CFGR = RCC_CFGR_PPRE1_DIV2; /* PLLs configuration -----*/ /* PLL2CLK = (HSE / 5) * 8 = 40 MHz PREDIV1CLK = PLL2 / 5 = 8 MHz */ RCC->CFGR2 = RCC_CFGR2_PREDIV2_DIV5 RCC_CFGR2_PLL2MUL8 RCC_CFGR2_PREDIV1SRC_PLL2 RCC_CFGR2_PREDIV1_DIV5; /* Enable PLL2 */ RCC->CR = RCC_CR_PLL2ON; /* Wait till PLL2 is ready */ while((RCC->CR & RCC_CR_PLL2RDY) == 0) { } /* PLLCLK = PREDIV1 * 9 = 72 MHz */ RCC->CFGR = RCC_CFGR_PLLXTPRE_PREDIV1 RCC_CFGR_PLLSRC_PREDIV1 RCC_CFGR_PLLMULL9; /* Enable the main PLL */ RCC->CR = RCC_CR_PLLON; /* Wait till the main PLL is ready */ while((RCC->CR & RCC_CR_PLLRDY) == 0) { } /* Main PLL used as system clock source --*/ RCC->CFGR = RCC_CFGR_SW_PLL; /* Wait till the main PLL is used as system clock source */ while ((RCC->CFGR & RCC_CFGR_SWS) != RCC_CFGR_SWS_PLL) { } </pre> | <pre> /* Enable HSE -----*/ RCC->CR = ((uint32_t)RCC_CR_HSEON); /* Wait till HSE is ready */ while((RCC->CR & RCC_CR_HSERDY) == 0) { } /* Flash configuration -----*/ /* Flash prefetch and cache ON, Flash 3 wait state */ FLASH->ACR = FLASH_ACR_PRFTEN FLASH_ACR_ICEN FLASH_ACR_DCEN FLASH_ACR_LATENCY_3WS; /* AHB and APBs prescaler configuration --*/ /* HCLK = SYSCLK */ RCC->CFGR = RCC_CFGR_HPRE_DIV1; /* PCLK2 = HCLK / 2 */ RCC->CFGR = RCC_CFGR_PPRE2_DIV2; /* PCLK1 = HCLK / 4 */ RCC->CFGR = RCC_CFGR_PPRE1_DIV4; /* PLL configuration -----*/ /* PLLCLK = ((HSE / PLL_M) * PLL_N) / PLL_P = ((25 MHz / 25) * 240) / 2 = 120 MHz */ RCC->PLLCFGR = PLL_M (PLL_N << 6) (((PLL_P >> 1) - 1) << 16) (RCC_PLLCFGR_PLLSRC_HSE) (PLL_Q << 24); /* Enable the main PLL */ RCC->CR = RCC_CR_PLLON; /* Wait till the main PLL is ready */ while((RCC->CR & RCC_CR_PLLRDY) == 0) { } /* Main PLL used as system clock source --*/ RCC->CFGR = RCC_CFGR_SW_PLL; /* Wait till the main PLL is used as system clock source */ while ((RCC->CFGR & RCC_CFGR_SWS) != RCC_CFGR_SWS_PLL) { } </pre> |

2. **Peripheral access configuration:** The address mapping of some peripherals has been changed in F2 series vs. F1 series, so you need to use different registers to [enable/disable] or [enter/exit] the peripheral [clock] or [from reset mode].

Table 6. RCC registers used for peripheral access configuration

| Bus | Register | Comments |
|------|---------------|--|
| AHB1 | RCC_AHB1RSTR | Used to [enter/exit] the AHB1 peripheral from reset |
| | RCC_AHB1ENR | Used to [enable/disable] the AHB1 peripheral clock |
| | RCC_AHB1LPENR | Used to [enable/disable] the AHB1 peripheral clock in low power Sleep mode |
| AHB2 | RCC_AHB2RSTR | Used to [enter/exit] the AHB2 peripheral from reset |
| | RCC_AHB2ENR | Used to [enable/disable] the AHB2 peripheral clock |
| | RCC_AHB2LPENR | Used to [enable/disable] the AHB2 peripheral clock in low power Sleep mode |
| AHB3 | RCC_AHB3RSTR | Used to [enter/exit] the AHB3 peripheral from reset |
| | RCC_AHB3ENR | Used to [enable/disable] the AHB3 peripheral clock |
| | RCC_AHB3LPENR | Used to [enable/disable] the AHB3 peripheral clock in low power Sleep mode |
| APB1 | RCC_APB1RSTR | Used to [enter/exit] the APB1 peripheral from reset |
| | RCC_APB1ENR | Used to [enable/disable] the APB1 peripheral clock |
| | RCC_APB1LPENR | Used to [enable/disable] the APB1 peripheral clock in low power Sleep mode |
| APB2 | RCC_APB2RSTR | Used to [enter/exit] the APB2 peripheral from reset |
| | RCC_APB2ENR | Used to [enable/disable] the APB2 peripheral clock |
| | RCC_APB2LPENR | Used to [enable/disable] the APB2 peripheral clock in low power Sleep mode |

To configure the access to a given peripheral you have first to know to which bus this peripheral is connected, refer to [Table 3 on page 13](#), then depending on the action needed you have to program the right register as described in [Table 6](#). above. For example, USART1 is connected to APB2 bus, to enable the USART1 clock you have to configure the APB2ENR register as follows:

```
RCC->APB2ENR |= RCC_APB2ENR_USART1EN;
```

to disable USART1 clock during Sleep mode (to reduce power consumption) you have to configure APB2LPENR register as follows:

```
RCC->APB2LPENR |= RCC_APB2LPENR_USART1LPEN;
```

3. ***Peripheral clock configuration:*** some peripherals have a dedicated clock source independent from the system clock, and used to generate the clock required for their operation::
 - a) **I2S:** in the F2 series the I2S clock can be derived either from a specific PLL (PLLI2S) or from an external clock mapped on the I2S_CKIN pin:
To use PLLI2S as I2S clock source: set RCC_CFGR[I2SSRC] bit to 1, configure the PLLI2S parameters (using RCC_PLLI2SCFGR[PLLI2SR] and RCC_PLLI2SCFGR[PLLI2SN] bits) then enable it (set RCC_CR[PLLI2SON] bit to

1), finally enable the I2S clock (using `RCC_APB1ENR[SPI2EN]` or/and `RCC_APB1ENR[SPI3EN]` bits)

To use external clock as I2S clock source: set `RCC_CFGR[I2SSRC]` bit to 0, then enable the I2S clock (using `RCC_APB1ENR[SPI2EN]` or/and `RCC_APB1ENR[SPI3EN]` bits)

- b) **USB OTG FS and SDIO:** in the F2 series the USB OTG FS requires a frequency of 48 MHz to work correctly, while the SDIO requires a frequency less than or equal to 48 MHz to work correctly. This clock is derived from the PLL through the Q divider.
- c) **ADC:** in the F2 series the ADC features two clock schemes:
- Clock for the analog circuitry:** ADCCLK, common to all ADCs. This clock is generated from the APB2 clock divided by a programmable prescaler that allows the ADC to work at $f_{PCLK2}/2, /4, /6$ or $/8$. The maximum value of ADCCLK is 30 MHz when the APB2 clock is at 60 MHz. This configuration is done using `ADC_CCR[ADCPRE]` bits.
- Clock for the digital interface (used for register read/write access):** This clock is equal to the APB2 clock. The digital interface clock can be enabled/disabled individually for each ADC through the `RCC_APB2ENR` register (`ADC1EN`, `ADC2EN` and `ADC3EN` bits). However, there is only a single bit (`RCC_APB2RSTR[ADCRST]`) to reset the three ADCs at the same time.

3.5 DMA

STM32 F2 series features a new DMA controller specially designed to get optimum system bandwidth, based on a complex bus matrix architecture. Thus the architecture, features and registers of this controller are different from the DMA embedded in the F1 series, i.e. any code on F1series using the DMA needs to be rewritten to run on F2 series.

STM32 F1 series embeds two DMA controllers, each controller has up to 7 channels. Each channel is dedicated to managing memory access requests from one or more peripherals. It has an arbiter for handling the priority between DMA requests.

STM32 F2 series embeds two DMA controllers, each controller has 8 streams, each stream is dedicated to managing memory access requests from one or more peripherals. Each stream can have up to 8 channels (requests) in total. Each has an arbiter for handling the priority between DMA requests.

The table below presents the correspondence between peripheral's DMA requests in STM32 F1 series and STM32 F2 series.

For more information about STM32 F2's DMA configuration and usage, please refer to section "Stream configuration procedure" in DMA chapter of STM32F2xx Reference Manual (RM0033).

Table 7. DMA request differences between STM32 F1 series and STM32 F2 series

| Peripheral | DMA request | STM32 F1series | STM32 F2 series |
|------------|------------------------------|--|--|
| ADC1 | ADC1 | DMA1_Channel1 | DMA2_Channel0: stream0 / stream4 |
| ADC2 | ADC2 | NA | DMA2_Channel1: stream2 / stream3 |
| ADC3 | ADC3 | DMA2_Channel5 | DMA2_Channel2: stream0 / stream1 |
| DAC | DAC_Channel1 DAC_Channel2 | DMA2_Channel3 / DMA1_Channel3 ⁽¹⁾ DMA2_Channel4 / DMA1_Channel4 ⁽¹⁾ | DMA1_Channel7: stream5 DMA1_Channel7: stream6 |
| SPI1 | SPI1_Rx SPI1_Tx | DMA1_Channel2 DMA1_Channel3 | DMA2_Channel3: stream0 / stream2 DMA2_Channel3: stream3 / stream5 |
| SPI2 | SPI2_Rx SPI2_Tx | DMA1_Channel4 DMA1_Channel5 | DMA1_Channel0: stream3 DMA1_Channel0: stream4 |
| SPI3 | SPI3_Rx SPI3_Tx | DMA2_Channel1 DMA2_Channel2 | DMA1_Channel0: stream0 / stream2 DMA1_Channel0: stream5 / stream7 |
| USART1 | USART1_Rx USART1_Tx | DMA1_Channel5 DMA1_Channel4 | DMA2_Channel4: stream2 / stream5 DMA2_Channel4: stream7 |
| USART2 | USART2_Rx USART2_Tx | DMA1_Channel6 DMA1_Channel7 | DMA1_Channel4: stream5 DMA1_Channel4: stream6 |
| USART3 | USART3_Rx USART3_Tx | DMA1_Channel3 DMA1_Channel2 | DMA1_Channel4: stream1 DMA1_Channel4: stream3 / DMA1_Channel7: stream4 |
| USART6 | USART6_Rx USART6_Tx | NA | DMA2_Channel5: stream1 / stream2 DMA2_Channel5: stream6 / stream7 |

Table 7. DMA request differences between STM32 F1 series and STM32 F2 series (continued)

| Peripheral | DMA request | STM32 F1series | STM32 F2 series |
|------------|-------------|----------------|--|
| UART4 | UART4_Rx | DMA2_Channel3 | DMA1_Channel4: stream2 |
| | UART4_Tx | DMA2_Channel5 | DMA1_Channel4: stream4 |
| UART5 | UART5_Rx | DMA2_Channe4 | DMA1_Channel4: stream0 |
| | UART5_Tx | DMA2_Channel1 | DMA1_Channel4: stream7 |
| I2C1 | I2C1_Rx | DMA1_Channe7 | DMA1_Channel1: stream0 / stream5 |
| | I2C1_Tx | DMA1_Channel6 | DMA1_Channel1: stream6 / stream7 |
| I2C2 | I2C2_Rx | DMA1_Channel5 | DMA1_Channel7: stream2 / stream3 |
| | I2C2_Tx | DMA1_Channel4 | DMA1_Channel7: stream7 |
| I2C3 | I2C3_Rx | NA | DMA1_Channel3: stream2 |
| | I2C3_Tx | | DMA1_Channel3: stream4 |
| SDIO | SDIO | DMA2_Channel4 | DMA2_Channel4: stream3 / stream6 |
| TIM1 | TIM1_UP | DMA1_Channel5 | DMA2_Channel6: stream5 |
| | TIM1_CH1 | DMA1_Channel2 | DMA2_Channel0: stream6 / DMA2_Channel6: stream1 / stream3 |
| | TIM1_CH2 | DMA1_Channel3 | DMA2_Channel0: stream6 / DMA2_Channel6: stream2 |
| | TIM1_CH3 | DMA1_Channel6 | DMA2_Channel0: stream6 / DMA2_Channel6: stream6 |
| | TIM1_CH4 | DMA1_Channel4 | DMA2_Channel6: stream4 |
| | TIM1_TRIG | DMA1_Channel4 | DMA2_Channel6: stream0 / stream4 |
| | TIM1_COM | DMA1_Channel4 | DMA2_Channel6: stream4 |
| | | | |
| TIM8 | TIM8_UP | DMA2_Channel1 | DMA2_Channel7: stream1 |
| | TIM8_CH1 | DMA2_Channel3 | DMA2_Channel0: stream2 / DMA2_Channel7: stream2 |
| | TIM8_CH2 | DMA2_Channel5 | DMA2_Channel0: stream2 / DMA2_Channel7: stream3 |
| | TIM8_CH3 | DMA2_Channel1 | DMA2_Channel0: stream2 / DMA2_Channel7: stream4 |
| | TIM8_CH4 | DMA2_Channel2 | DMA2_Channel7: stream7 |
| | TIM8_TRIG | DMA2_Channel2 | DMA2_Channel7: stream7 |
| | TIM8_COM | DMA2_Channel2 | DMA2_Channel7: stream7 |
| | | | |
| TIM2 | TIM2_UP | DMA1_Channel2 | DMA1_Channel3: stream1 / stream7 |
| | TIM2_CH1 | DMA1_Channel5 | DMA1_Channel3: stream5 |
| | TIM2_CH2 | DMA1_Channel7 | DMA1_Channel3: stream6 |
| | TIM2_CH3 | DMA1_Channel1 | DMA1_Channel3: stream1 |
| | TIM2_CH4 | DMA1_Channel7 | DMA1_Channel3: stream6 / stream7 |
| TIM3 | TIM3_UP | DMA1_Channel3 | DMA1_Channel5: stream2 |
| | TIM3_CH1 | DMA1_Channel6 | DMA1_Channel5: stream4 |
| | TIM3_TRIG | DMA1_Channel6 | DMA1_Channel5: stream4 |
| | TIM3_CH3 | DMA1_Channel2 | DMA1_Channel5: stream7 |
| | TIM3_CH4 | DMA1_Channel3 | DMA1_Channel5: stream2 |
| | TIM3_CH2 | NA | DMA1_Channel5: stream5 |
| | | | |

Table 7. DMA request differences between STM32 F1 series and STM32 F2 series (continued)

| Peripheral | DMA request | STM32 F1series | STM32 F2 series |
|------------|-------------|--|----------------------------------|
| TIM4 | TIM4_UP | DMA1_Channel7 | DMA1_Channel2: stream6 |
| | TIM4_CH1 | DMA1_Channel1 | DMA1_Channel2: stream0 |
| | TIM4_CH2 | DMA1_Channel4 | DMA1_Channel2: stream3 |
| | TIM4_CH3 | DMA1_Channel5 | DMA1_Channel2: stream7 |
| TIM5 | TIM5_UP | DMA2_Channel2 | DMA1_Channel6: stream0 / stream6 |
| | TIM5_CH1 | DMA2_Channel5 | DMA1_Channel6: stream2 |
| | TIM5_CH2 | DMA2_Channel4 | DMA1_Channel6: stream4 |
| | TIM5_CH3 | DMA2_Channel2 | DMA1_Channel6: stream0 |
| | TIM5_CH4 | DMA2_Channel1 | DMA1_Channel6: stream1 / stream3 |
| | TIM5_TRIG | DMA2_Channel1 | DMA1_Channel6: stream1 / stream3 |
| TIM6 | TIM6_UP | DMA2_Channel3 / DMA1_Channel3 ⁽¹⁾ | DMA1_Channel7: stream1 |
| TIM7 | TIM7_UP | DMA2_Channel4 / DMA1_Channel4 ⁽¹⁾ | DMA1_Channel1: stream2 / stream4 |
| TIM15 | TIM15_UP | DMA1_Channel5 | NA |
| | TIM15_CH1 | DMA1_Channel5 | |
| | TIM15_TRIG | DMA1_Channel5 | |
| | TIM15_COM | DMA1_Channel5 | |
| TIM16 | TIM16_UP | DMA1_Channel6 | NA |
| | TIM16_CH1 | DMA1_Channel6 | |
| TIM17 | TIM17_UP | DMA1_Channel7 | NA |
| | TIM17_CH1 | DMA1_Channel7 | |
| DCMI | DCMI | NA | DMA2_Channel1: stream1 / stream7 |
| CRYP | CRYP_OUT | NA | DMA2_Channel2: stream5 |
| | CRYP_IN | | DMA2_Channel2: stream6 |
| | HASH_IN | | DMA2_Channel2: stream7 |

1. For High-density value line devices, the DAC DMA requests are mapped respectively on DMA1 Channel 3 and DMA1 Channel 4

3.5.1 Interrupts

The table below presents the interrupt vectors in STM32 F2 series vs. F1 series

The changes in F2 interrupt vectors impact only a few peripherals:

1. **ADC:** in F1 series there are two interrupt vectors for the ADCs; ADC1_2 and ADC3. However in F2 series there is a single interrupt vector for all ADCs; ADC_IRQ. As consequence, when moving to F2 series you have to add some code in the ADC IRQ handler to know which ADC has generated the Interrupt.
2. **DMA:** in F2 series you have to check first to which DMA stream the peripheral DMA request is connected, then in the associated DMA stream IRQ add the code needed to manage the DMA interrupt request (in F2 series there are five interrupt request sources, while there are only three in F1 series).
 - Let's consider the following example; an application uses the DMA to transfer data from memory to the I2S2 data out register and at each end of DMA transfer, an interrupt is generated to reconfigure the I2S/DMA parameters. In F1 series the I2S2 DMA request is configured to be served by DMA1_Channel4, so the code used to manage DMA end of transfer is put in the DMA1_Channel4 IRQ handler. In F2 series the I2S2 DMA request is configured to be served by DMA1_Stream3_Channel0, so the code used to manage DMA end of transfer is put in the in DMA1_Stream3 IRQ handler.
3. **TIM6:** in F2 series the TIM6 interrupt vector is shared with the DAC interrupt, so when TIM6 and DAC interrupts are used in the same application you have to add some code to check which peripheral has generated the interrupt.

Table 8. Interrupt vector differences between STM32 F1 series and STM32 F2 series

| Position | STM32 F1 series | STM32 F2 series |
|----------|--|--------------------|
| 0 | WWDG | WWDG |
| 1 | PVD | PVD |
| 2 | TAMPER | TAMP_STAMP |
| 3 | RTC | RTC_WKUP |
| 4 | FLASH | FLASH |
| 5 | RCC | RCC |
| 6 | EXTI0 | EXTI0 |
| 7 | EXTI1 | EXTI1 |
| 8 | EXTI2 | EXTI2 |
| 9 | EXTI3 | EXTI3 |
| 10 | EXTI4 | EXTI4 |
| 11 | DMA1_Channel1 | DMA1_Stream0 |
| 12 | DMA1_Channel2 | DMA1_Stream1 |
| 13 | DMA1_Channel3 | DMA1_Stream2 |
| 14 | DMA1_Channel4 | DMA1_Stream3 |
| 15 | DMA1_Channel5 | DMA1_Stream4 |
| 16 | DMA1_Channel6 | DMA1_Stream5 |
| 17 | DMA1_Channel7 | DMA1_Stream6 |
| 18 | ADC1_2 | ADC |
| 19 | CAN1_TX / USB_HP_CAN_TX ⁽¹⁾ | CAN1_TX |
| 20 | CAN1_RX0 / USB_LP_CAN_RX0 ⁽¹⁾ | CAN1_RX0 |
| 21 | CAN1_RX1 | CAN1_RX1 |
| 22 | CAN1_SCE | CAN1_SCE |
| 23 | EXTI9_5 | EXTI9_5 |
| 24 | TIM1_BRK / TIM1_BRK_TIM9 ⁽¹⁾ | TIM1_BRK_TIM9 |
| 25 | TIM1_UP / TIM1_UP_TIM10 ⁽¹⁾ | TIM1_UP_TIM10 |
| 26 | TIM1_TRG_COM / TIM1_TRG_COM_TIM11 ⁽¹⁾ | TIM1_TRG_COM_TIM11 |
| 27 | TIM1_CC | TIM1_CC |
| 28 | TIM2 | TIM2 |
| 29 | TIM3 | TIM3 |
| 30 | TIM4 | TIM4 |
| 31 | I2C1_EV | I2C1_EV |
| 32 | I2C1_ER | I2C1_ER |
| 33 | I2C2_EV | I2C2_EV |

Table 8. Interrupt vector differences between STM32 F1 series and STM32 F2 series

| Position | STM32 F1 series | STM32 F2 series |
|----------|---|--------------------|
| 34 | I2C2_ER | I2C2_ER |
| 35 | SPI1 | SPI1 |
| 36 | SPI2 | SPI2 |
| 37 | USART1 | USART1 |
| 38 | USART2 | USART2 |
| 39 | USART3 | USART3 |
| 40 | EXTI15_10 | EXTI15_10 |
| 41 | RTC_Alarm | RTC_Alarm |
| 42 | OTG_FS_WKUP / USBWakeUp | OTG_FS_WKUP |
| 43 | TIM8_BRK / TIM8_BRK_TIM12 ⁽¹⁾ | TIM8_BRK_TIM12 |
| 44 | TIM8_UP / TIM8_UP_TIM13 ⁽¹⁾ | TIM8_UP_TIM13 |
| 45 | TIM8_TRG_COM / TIM8_TRG_COM_TIM14 ⁽¹⁾ | TIM8_TRG_COM_TIM14 |
| 46 | TIM8_CC | TIM8_CC |
| 47 | ADC3 | DMA1_Stream7 |
| 48 | FSMC | FSMC |
| 49 | SDIO | SDIO |
| 50 | TIM5 | TIM5 |
| 51 | SPI3 | SPI3 |
| 52 | UART4 | UART4 |
| 53 | UART5 | UART5 |
| 54 | TIM6 / TIM6_DAC ⁽¹⁾ | TIM6_DAC |
| 55 | TIM7 | TIM7 |
| 56 | DMA2_Channel1 | DMA2_Stream0 |
| 57 | DMA2_Channel2 | DMA2_Stream1 |
| 58 | DMA2_Channel3 | DMA2_Stream2 |
| 59 | DMA2_Channel4 / DMA2_Channel4_5 ⁽¹⁾ | DMA2_Stream3 |
| 60 | DMA2_Channel5 | DMA2_Stream4 |
| 61 | ETH | ETH |
| 62 | ETH_WKUP | ETH_WKUP |
| 63 | CAN2_TX | CAN2_TX |
| 64 | CAN2_RX0 | CAN2_RX0 |
| 65 | CAN2_RX1 | CAN2_RX1 |
| 66 | CAN2_SCE | CAN2_SCE |
| 67 | OTG_FS | OTG_FS |

Table 8. Interrupt vector differences between STM32 F1 series and STM32 F2 series

| Position | STM32 F1 series | STM32 F2 series |
|----------|-----------------|-----------------|
| 68 | NA | DMA2_Stream5 |
| 69 | NA | DMA2_Stream6 |
| 70 | NA | DMA2_Stream7 |
| 71 | NA | USART6 |
| 72 | NA | I2C3_EV |
| 73 | NA | I2C3_ER |
| 74 | NA | OTG_HS_EP1_OUT |
| 75 | NA | OTG_HS_EP1_IN |
| 76 | NA | OTG_HS_WKUP |
| 77 | NA | OTG_HS |
| 78 | NA | DCMI |
| 79 | NA | CRYP |
| 80 | NA | HASH_RNG |

Color key:

- = Different Interrupt vector
- = Interrupt Vector name changed but F1 peripheral still mapped on the same Interrupt Vector position in F2 series
- = Feature not available (NA)

1. Depending on the product line used

3.6 GPIO

The STM32 F2 GPIO peripheral embeds new features compared to F1 series, the main ones are listed below:

- GPIO mapped on AHB bus for better performance
- I/O pin multiplexer and mapping: pins are connected to on-board peripherals/modules through a multiplexer that allows only one peripheral alternate function (AF) to be connected to an I/O pin at a time. In this way, there can be no conflict between peripherals sharing the same I/O pin.
- More possibilities and features for I/O configuration

The F2 GPIO peripheral is a new design and thus the architecture, features and registers are different from the GPIO peripheral in the F1 series, i.e. any code on F1series using the GPIO needs to be rewritten to run on F2 series.

For more information about STM32 F2's GPIO programming and usage, please refer to section "I/O pin multiplexer and mapping" in the GPIO chapter of STM32F2xx Reference Manual (RM0033).

The table below presents the differences between GPIOs in the STM32 F1 series and STM32 F2 series.

Table 9. GPIO differences between STM32 F1 series and STM32 F2 series

| GPIO | STM32 F1 series | STM32 F2 series |
|-------------------------------------|---|---|
| Input mode | Floating PU PD | Floating PU PD |
| General purpose output | PP OD | PP PP + PU PP + PD OD OD + PU OD + PD |
| Alternate Function output | PP OD | PP PP + PU PP + PD OD OD + PU OD + PD |
| Input / Output | Analog | Analog |
| Output speed | 2 MHz 10 MHz 50 MHz | 2 MHz 25 MHz 50 MHz 100 MHz |
| Alternate function selection | To optimize the number of peripheral I/O functions for different device packages, it is possible to remap some alternate functions to some other pins (software remap). | Highly flexible pin multiplexing allows no conflict between peripherals sharing the same I/O pin. |
| Max IO toggle frequency | 16 MHz | 60 MHz |

3.6.1 Alternate function mode

In STM32 F1 series

1. The configuration to use an I/O as alternate function depends on the peripheral mode used. For example, the USART Tx pin should be configured as alternate function push-pull while USART Rx pin should be configured as input floating or input pull-up.
2. To optimize the number of peripheral I/O functions for different device packages (especially with those with low pin count), it is possible by software to remap some alternate functions to other pins. For example, the USART2_RX pin can be mapped on PA3 (default remap) or PD6 (done through software remap) pin.

In STM32 F2 series

1. Whatever the peripheral mode used, the I/O must be configured as alternate function, then the system can use the I/O in the proper way (input or output).
2. The I/O pins are connected to onboard peripherals/modules through a multiplexer that allows only one peripheral's alternate function to be connected to an I/O pin at a time.

In this way, there can be no conflict between peripherals sharing the same I/O pin. Each I/O pin has a multiplexer with sixteen alternate function inputs (AF0 to AF15) that can be configured through the GPIOx_AFRL and GPIOx_AFRH registers:

- After reset all I/Os are connected to the system's alternate function 0 (AF0)
 - The peripherals' alternate functions are mapped from AF1 to AF13
 - Cortex-M3 EVENTOUT is mapped on AF15
3. In addition to this flexible I/O multiplexing architecture, each peripheral has alternate functions mapped onto different I/O pins to optimize the number of peripheral I/O functions for different device packages. For example, the USART2_RX pin can be mapped on PA3 or PD6 pin

Note: Please refer to the "Alternate function mapping" table in the STM32F20x and STM32F21x datasheets for the detailed mapping of the system and peripherals' alternate function I/O pins.

4. Configuration procedure
- Configure the desired I/O as an alternate function in the GPIOx_MODER register
 - Select the type, pull-up/pull-down and output speed via the GPIOx_OTYPER, GPIOx_PUPDR and GPIOx_OSPEEDER registers, respectively
 - Connect the I/O to the desired AFx in the GPIOx_AFRL or GPIOx_AFRH register

3.7 EXTI source selection

In STM32 F1 the selection of the EXTI line source is performed through the EXTIx bits in the AFIO_EXTICRx registers, while in F2 series this selection is done through the EXTIx bits in the SYSCFG_EXTICRx registers.

Only the mapping of the EXTICRx registers has been changed, without any changes to the meaning of the EXTIx bits. However, the range of EXTIx bits values has been extended to 0b1000 to support the two ports added in F2, port H and I (in F1 series the maximum value is 0b0110).

3.8 FLASH

The table below presents the difference between the FLASH interface in the STM32 F1 and STM32 F2 series, these differences are the following:

- New interface, new technology
- New architecture, sectors instead of pages
- New read protection mechanism, 3 read protection levels with JTAG fuse




As consequence the F2 Flash programming procedures and registers are different from the the F1 series, i.e. any code on F1 series using the Flash needs to be rewritten to run on F2 series.

For more information on programming, erasing and protection of the F2 Flash memory, please refer to the STM32F2xx Flash programming manual (PM0059).

Table 10. FLASH differences between STM32 F1 series and STM32 F2 series

| Flash | | STM32 F1 series | STM32 F2 series |
|----------------------------|------------------------------|--|--|
| Wait States | | up to 2 | up to 7 (depending on the supply voltage) |
| Main/Program memory | Start Address | 0x0800 0000 | 0x0800 0000 |
| | End Address | up to 0x080F FFFF | up to 0x080F FFFF |
| | Granularity | Page of 2 Kbytes size except for Low and Medium density Page of 1 Kbytes | 4 sectors of 16 Kbytes 1 sector of 64 Kbytes 7 sectors of 128 Kbytes |
| EEPROM memory | Start Address | Available by SW emulation ⁽¹⁾ | Available by SW emulation ⁽²⁾ |
| | End Address | | |
| System memory | Start Address | 0x1FFF F000 | 0x1FFF 0000 |
| | End Address | 0x1FFF F7FF | 0x1FFF 77FF |
| Option Bytes | Start Address | 0x1FFF F800 | 0x1FFF C000 |
| | End Address | 0x1FFF F80F | 0x1FFF C007 |
| OTP | Start Address | NA | 0x1FFF 7800 |
| | End Address | | 0x1FFF 79FF |
| Flash interface | Start address | 0x4002 2000 | 0x4002 3C00 |
| | Programming procedure | Same for all product lines | Different from F1 series |
| Erase granularity | | Page (1 or 2 Kbytes) | Sector |
| Program mode | | Half word | Byte Half word word Double word (with external VPP supply) |
| Read Protection | Unprotection | Read protection disable RDP = 0xA55A | Level 0 no protection RDP = 0xAA |
| | Protection | Read protection enable RDP != 0xA55A | Level 1 memory protection RDP != (Level 2 & Level 0) |
| | JTAG fuse | NA | Level 2 RDP = 0xCC ⁽³⁾ |
| Write protection | | Protection by 4Kbytes | Protection by sector |

Table 10. FLASH differences between STM32 F1 series and STM32 F2 series

| Flash | STM32 F1 series | STM32 F2 series |
|---|-----------------|-----------------|
| User Option bytes | STOP | STOP |
| | STANDBY | STANDBY |
| | WDG | WDG |
| | NA | BOR level |
| Color key:  = New feature or new architecture  = Same feature, but specification change or enhancement  = Feature not available (NA) | | |

1. For more details refer to Application note AN2594 *EEPROM emulation in STM32F10x microcontrollers*
2. For more details refer to Application note AN3390 *EEPROM emulation in STM32F2xx microcontrollers*
3. Memory read protection Level 2 is an irreversible operation. When Level 2 is activated, the level of protection cannot be decreased to Level 0 or Level 1.

3.9 ADC


The table below presents the differences between the ADC interface of STM32 F1 series and STM32 F2 series, these differences are the following:

- New digital interface
- New architecture and new features

Table 11. ADC differences between STM32 F1 series and STM32 F2 series

| ADC | STM32 F1 series | STM32 F2 series |
|---------------------------|--|--|
| ADC Type | SAR structure | SAR structure |
| Instances | ADC1 / ADC2 / ADC3 | ADC1 / ADC2 / ADC3 |
| Max Sampling freq | 1 MSPS | 2 MSPS |
| Number of channels | up to 21 channels | up to 24 Channels |
| Resolution | 12-bit | 12-bit, 10-bit, 8-bit, 6-bit |
| Conversion Modes | Single / continuous / Scan / Discontinuous / Dual Mode | Single / continuous / Scan / Discontinuous / Dual Mode / Triple Mode |
| DMA | Yes | Yes |

Table 11. ADC differences between STM32 F1 series and STM32 F2 series (continued)

| ADC | STM32 F1 series | | STM32 F2 series | |
|---|---|---|---|---|
| External trigger | Yes | | Yes | |
| | <u>External event for regular group</u> For ADC1 and ADC2: TIM1 CC1 TIM1 CC2 TIM1 CC3 TIM2 CC2 TIM3 TRGO TIM4 CC4 EXTI line 11 / TIM8_TRGO For ADC3: TIM3 CC1 TIM2 CC3 TIM1 CC3 TIM8 CC1 TIM8 TRGO TIM5 CC1 TIM5 CC3 | <u>External event for injected group</u> For ADC1 and ADC2: TIM1 TRGO TIM1 CC4 TIM2 TRGO TIM2 CC1 TIM3 CC4 TIM4 TRGO EXTI line15 / TIM8_CC4 For ADC3: TIM1 TRGO TIM1 CC4 TIM4 CC3 TIM8 CC2 TIM8 CC4 TIM5 TRGO TIM5 CC4 | <u>External event for regular group</u> TIM1 CC1 TIM1 CC2 TIM1 CC3 TIM2 CC2 TIM2 CC3 TIM2 CC4 TIM2 TRGO TIM3 CC1 TIM3 TRGO TIM4 CC4 TIM5 CC1 TIM5 CC2 TIM5 CC3 TIM8 CC1 TIM8 TRGO EXTI line11 | <u>External event for injected group</u> TIM1 CC4 TIM1 TRGO TIM2 CC1 TIM2 TRGO TIM3 CC2 TIM3 CC4 TIM4 CC1 TIM4 CC2 TIM4 CC3 TIM4 TRGO TIM5 CC4 TIM5 TRGO TIM8 CC2 TIM8 CC3 TIM8 CC4 EXTI line15 |
| Supply requirement | 2.4 V to 3.6 V | | 2.4 V to 3.6 V for full speed 1.8 V to 3.6 V for reduced speed | |
| Input range | $V_{REF-} \leq V_{IN} \leq V_{REF+}$ | | $V_{REF-} \leq V_{IN} \leq V_{REF+}$ | |
| <p>Color key:</p> <p> = Same feature, but specification change or enhancement</p> | | | | |



3.10 PWR

In STM32 F2 series the PWR controller presents some differences vs. F1 series, these differences are summarized in the table below. However, the programming interface is unchanged.

Table 12. PWR differences between STM32 F1 series and STM32 F2 series

| PWR | STM32 F1 series | STM32 F2 series |
|-------------------------|--|--|
| Power supplies | <p>1. VDD = 2.0 to 3.6 V: external power supply for I/Os and the internal regulator. Provided externally through VDD pins.</p> <p>2. VSSA, VDDA = 2.0 to 3.6 V: external analog power supplies for ADC, DAC, Reset blocks, RCs and PLL (minimum voltage to be applied to VDDA is 2.4 V when the ADC or DAC is used). VDDA and VSSA must be connected to VDD and VSS, respectively.</p> <p>3. VBAT = 1.8 to 3.6 V: power supply for RTC, external clock 32 kHz oscillator and backup registers (through power switch) when VDD is not present.</p> | <p>1. VDD = 1.8 to 3.6 V: external power supply for I/Os and the internal regulator (when enabled), provided externally through VDD pins. On WLCSP package, VDD ranges from 1.65 to 3.6 V. VDD/VDDA minimum value of 1.65 V is obtained when the device operates in a reduced temperature range.</p> <p>2. VSSA, VDDA = 1.8 to 3.6 V: external analog power supplies for ADC, DAC, Reset blocks, RCs and PLL. VDDA and VSSA must be connected to VDD and VSS, respectively.</p> <p>3. VBAT = 1.65 to 3.6 V: power supply for RTC, external clock 32 kHz oscillator and backup registers (through power switch) when VDD is not present.</p> |
| | NA | Note: in UFBGA and WLCSP packages, the internal regulator can be switched off |
| Battery backup domain | <ul style="list-style-type: none"> – Backup registers – RTC – LSE – PC13 to PC15 I/Os <p>Note: in F1 series the Backup registers are integrated in the BKP peripheral.</p> | <ul style="list-style-type: none"> – RTC with backup registers – LSE – PC13 to PC15 I/Os, plus PI8 I/O (when available) <p>Note: in F2 series the backup registers are integrated in the RTC peripheral</p> |
| | NA | 4 Kbytes backup SRAM when the low power backup regulator is enabled (this SRAM can be used as EEPROM as long as the VBAT supply is present) |
| Power supply supervisor | Integrated POR / PDR circuitry Programmable Voltage Detector (PVD) | Integrated POR / PDR circuitry Programmable voltage detector (PVD) |
| | NA | Brownout reset (BOR) |
| Low-power modes | <ul style="list-style-type: none"> Sleep mode Stop mode Standby mode (1.8V domain powered-off) | <ul style="list-style-type: none"> Sleep mode + peripherals automatic clock gating(*) Stop mode Standby mode (1.2 V domain powered off) <p>(*)To further reduce power consumption in Sleep mode the peripheral clocks can be disabled prior to executing the WFI or WFE instructions.</p> |

Table 12. PWR differences between STM32 F1 series and STM32 F2 series

| PWR | STM32 F1 series | STM32 F2 series |
|---|---|---|
| Wake-up sources | Sleep mode: – Any peripheral interrupt/wakeup event Stop mode: – Any EXTI line event/interrupt Standby mode: – WKUP pin rising edge – RTC alarm – External reset in NRST pin – IWDG reset | Sleep mode: – Any peripheral interrupt/wakeup event Stop mode: – Any EXTI line event/interrupt Standby mode: – WKUP pin rising edge – RTC alarm A, RTC alarm B, RTC Wakeup, Tamper event, TimeStamp event – External reset in NRST pin – IWDG reset |
| Configuration | NA | In F2 two additional bits have been added: – PWR_CR[FPDS] used to power down the Flash in Stop mode – PWR_CSR[BRE] used to enable/disable the Backup regulator |
| <p>Color key:</p> <p> = New feature or new architecture</p> <p> = Same feature, but specification change or enhancement</p> | | |

3.11 RTC

The STM32 F2 series embeds a new RTC peripheral vs. F1 series; the architecture, features and programming interface are different.

As a consequence the F2 RTC programming procedures and registers are different from the F1 series, i.e. any code on F1series using the RTC needs to be rewritten to run on F2 series.

This new RTC provides best-in-class features:

- BCD timer/counter
- Time-of-day clock/calendar with programmable daylight saving compensation
- Two programmable alarm interrupts
- Digital calibration circuit
- Time-stamp function for event saving
- Periodic programmable wakeup flag with interrupt capability
- Automatic wakeup unit to manage low power modes
- 20 backup registers (80 bytes) which are reset when a tamper detection event occurs.

For more information about STM32 F2’s RTC features, please refer to RTC chapter of STM32F2xx Reference Manual (RM0033).

For advanced information about the RTC programming, please refer to the Application Note AN3371 *Using the STM32 HW real-time clock (RTC)*.

3.12 Miscellaneous

3.12.1 Ethernet PHY interface selection

In STM32 F1 series the Ethernet PHY interface selection is done in the AFIO peripheral (MII_RMII_SEL bit in AFIO_MAPR register), while in F2 series this configuration is done in the SYSCFG peripheral (MII_RMII_SEL bit in SYSCFG_PMC register).

3.12.2 TIM2 internal trigger 1 (ITR1) remapping

The example below shows how to select USB OTG FS SOF output or ETH PTP trigger output as input for TIM2 ITR1 in STM32 F1 series:

1. In F1 series to select USB OTG FS SOF output as input for TIM2 ITR1, set to 1 the bit TIM2ITR1_IREMAP in AFIO_MAPR register. Reset this bit to 0 to connect the Ethernet PTP trigger output to TIM2 ITR1 input.
2. In F2 series to select USB OTG FS SOF output as input for TIM2 ITR1, set to [10] the bits ITR1_RMP[1:0] in TIM2_OR register. Set these bits to [01] connect the Ethernet PTP trigger output to TIM2 ITR1 input.

4 Firmware migration using the library

This section describes how to migrate an application based on STM32F1xx Standard Peripherals Library in order to use the STM32F2xx Standard Peripherals Library.

The STM32F1xx and STM32F2xx libraries have the same architecture and are CMSIS compliant, they use the same driver naming and the same APIs for all compatible peripheral.

Only a few peripheral drivers need to be updated to migrate the application from an F1 series product to an F2 series product.

Note: In the rest of this chapter (unless otherwise specified), the term “STM32F2xx Library” is used to refer to the STM32F2xx Standard Peripherals Library and the term “STM32F10x Library” is used to refer to the STM32F10x Standard Peripherals Library.

4.1 Migration steps

To update your application code to run on STM32F2xx Library, you have to follow the steps listed below:

1. Update the toolchain startup files
 - a) *Project files:* device connections and Flash memory loader. These files are provided with the latest version of your toolchain that supports STM32F2xxx devices. For more information please refer to your toolchain documentation.
 - b) *Linker configuration and vector table location files:* these files are developed following the CMSIS standard and are included in the STM32F2xx Library install package under the following directory:
`Libraries\CMSIS\CM3\DeviceSupport\ST\STM32F2xx\`
2. Add STM32F2xxx Library source files to the application sources
 - a) Replace the `stm32f10x_conf.h` file of your application with `stm32f2xx_conf.h` provided in STM32F2xx Library.
 - b) Replace the existing `stm32f10x_it.c/stm32f10x_it.h` files in your application with `stm32f2xx_it.c/stm32f2xx_it.h` provided in STM32F2xx Library.
3. Update the part of your application code that uses the RCC, DMA, GPIO, FLASH, ADC and RTC drivers. Further details are provided in the next section.

Note: The STM32F2xx Library comes with a rich set of examples (84 in total) demonstrating how to use the different peripherals (under `Project\STM32F2xx_StdPeriph_Examples`).

4.2 RCC

1. *System clock configuration:* as presented in [Section 3.4: RCC](#) the STM32 F2 and F1 series have the same clock sources and configuration procedures. However, there are some differences related to the PLL configuration, maximum frequency and Flash wait state configuration. Thanks to the CMSIS layer, these differences are hidden from the application code; you only have to replace the `system_stm32f10x.c` file by `system_stm32f2xx.c` file. This file provides an implementation of `SystemInit()` function

used to configure the microcontroller system at start-up and before branching to the main() program.

Note: For STM32F2xx you can use the clock configuration tool, *STM32F2xx_Clock_Configuration.xls*, to generate a customized *SystemInit()* function depending on your application requirements. For more information, refer to the application note AN3362 “Clock configuration tool for STM32F2xx microcontrollers”

2. **Peripheral access configuration:** as presented in [Section 3.4: RCC](#) you need to call different functions to [enable/disable] or [enter/exit] the peripheral [clock] or [from reset mode]. For example, GPIOA is mapped on AHB1 bus on F2 series (APB2 bus on F1 series), to enable its clock you have to use the `RCC_AHB1PeriphClockCmd(RCC_AHB1Periph_GPIOA, ENABLE);` function instead of: `RCC_APB2PeriphClockCmd(RCC_APB2Periph_GPIOA, ENABLE);` in the F1 series. Refer to [Table 3 on page 13](#) for the peripheral bus mapping changes between F2 and F1 series.

3. Peripheral clock configuration

- a) **I2S:** in STM32 F2 series the I2S clock can be derived either from a specific PLL (PLLI2S) or from an external clock mapped on the I2S_CKIN pin. Refer to the code given below, that should be used in both cases:

```

/*****
/*                               PLLI2S used as I2S clock source                               */
/*****
/* Select PLLI2S as I2S clock source */
RCC_I2SCLKConfig(RCC_I2S2CLKSource_PLLI2S);

/* Configure the PLLI2S clock multiplication and division factors
   Note: PLLI2S clock source is common with the main PLL (configured in
        RCC_PLLConfig function )
*/
RCC_PLLI2SConfig(PLLI2SN, PLLI2SR);

/* Enable PLLI2S */
RCC_PLLI2SCmd(ENABLE);

/* Wait till PLLI2S is ready */
while(RCC_GetFlagStatus(RCC_FLAG_PLLI2SRDY) == 0)
{
}

/* Enable I2Sx's APB interface clock (I2S2/3 are subset of SPI2/3 peripherals) */
RCC_APB1PeriphClockCmd(RCC_APB1Periph_SPIx, ENABLE);

/*****
/*                               External clock used as I2S clock source                               */
/*****
/* Select External clock mapped on the I2S_CKIN pin as I2S clock source */
RCC_I2SCLKConfig(RCC_I2S2CLKSource_Ext);

/* Enable I2Sx's APB interface clock (I2S2/3 are subset of SPI2/3 peripherals) */
RCC_APB1PeriphClockCmd(RCC_APB1Periph_SPIx, ENABLE);

```

- b) **USB OTG FS and SDIO:** in STM32 F2 series the USB OTG FS requires a frequency of 48 MHz to work correctly, while the SDIO requires a frequency of less

than or equal to 48 MHz to work correctly. The following is an example of the main PLL configuration to obtain 120 MHz as system clock frequency and 48 MHz for the OTG FS and SDIO.

```

/* PLL_VCO = (HSE_VALUE / PLL_M) * PLL_N = 240 MHz */
#define PLL_M      25
#define PLL_N      240

/* SYSCLK = PLL_VCO / PLL_P = 120 MHz */
#define PLL_P      2

/* USB OTG FS, SDIO and RNG Clock = PLL_VCO / PLLQ = 48 MHz */
#define PLL_Q      5

...
/* Configure the main PLL */
RCC_PLLConfig(RCC_PLLSource_HSE, PLL_M, PLL_N, PLL_P, PLL_Q, 0);

/* Wait till PLL is ready */
while(RCC_GetFlagStatus(RCC_FLAG_PLLRDY) == 0)
{
}
...
/* Enable USB OTG FS's AHB interface clock */
RCC_AHB2PeriphClockCmd(RCC_AHB2Periph_OTG_FS, ENABLE);

/* Enable SDIO's APB interface clock */
RCC_APB2PeriphClockCmd(RCC_APB2Periph_SDIO, ENABLE);

```

c) **ADC**: in STM32 F2 series the ADC features two clock schemes:

- Clock for the analog circuitry: ADCCLK, common to all ADCs. This clock is generated from the APB2 clock divided by a programmable prescaler that allows the ADC to work at $f_{PCLK2}/2, /4, /6$ or $/8$. The maximum value of ADCCLK is 30 MHz when the APB2 clock is at 60 MHz. This configuration is done using the ADC registers.
- Clock for the digital interface (used for register read/write access). This clock is equal to the APB2 clock. The digital interface clock can be enabled/disabled individually for each ADC through the RCC APB2 peripheral clock enable register (RCC_APB2ENR). However, there is only a single bit to reset the three ADCs at the same time.

```

/* Enable APB interface clock for ADC1, ADC2 and ADC3 */
RCC_APB2PeriphClockCmd(RCC_APB2Periph_ADC1 | RCC_APB2Periph_ADC2 |
                       RCC_APB2Periph_ADC3, ENABLE);

/* Reset ADC1, ADC2 and ADC3 */
RCC_APB2PeriphResetCmd(RCC_APB2Periph_ADC, ENABLE);
RCC_APB2PeriphResetCmd(RCC_APB2Periph_ADC, DISABLE);

```

4.3 FLASH

The table below presents the correspondence between the FLASH driver APIs in the STM32F10x and STM32F2xx Libraries. You can easily update your application code by replacing STM32F10x functions by the corresponding function in STM32F2xx Library.

Table 13. STM32F10x and STM32F2xx FLASH driver API correspondence

| | STM32F10x Flash driver API | STM32F2xx Flash driver API |
|-------------------------|--|--|
| Interface configuration | void FLASH_SetLatency(uint32_t FLASH_Latency); | void FLASH_SetLatency(uint32_t FLASH_Latency); |
| | void FLASH_PrefetchBufferCmd(uint32_t FLASH_PrefetchBuffer); | void FLASH_PrefetchBufferCmd(FunctionalState NewState); |
| | void FLASH_HalfCycleAccessCmd(uint32_t FLASH_HalfCycleAccess); | NA |
| | NA | void FLASH_InstructionCacheCmd(FunctionalState NewState); |
| | NA | void FLASH_DataCacheCmd(FunctionalState NewState); |
| | NA | void FLASH_InstructionCacheReset(void); |
| | NA | void FLASH_DataCacheReset(void); |
| | void FLASH_ITConfig(uint32_t FLASH_IT, FunctionalState NewState); | void FLASH_ITConfig(uint32_t FLASH_IT, FunctionalState NewState); |
| Memory Programming | void FLASH_Unlock(void); | void FLASH_Unlock(void); |
| | void FLASH_Lock(void); | void FLASH_Lock(void); |
| | FLASH_Status FLASH_ErasePage(uint32_t Page_Address); | FLASH_Status FLASH_EraseSector(uint32_t FLASH_Sector); |
| | FLASH_Status FLASH_EraseAllPages(void); | FLASH_Status FLASH_EraseAllSectors(void); |
| | FLASH_Status FLASH_EraseOptionBytes(void); | NA |
| | NA | FLASH_Status FLASH_ProgramDoubleWord(uint32_t Address, uint64_t Data); |
| | FLASH_Status FLASH_ProgramWord(uint32_t Address, uint32_t Data); | FLASH_Status FLASH_ProgramWord(uint32_t Address, uint32_t Data); |
| | FLASH_Status FLASH_ProgramHalfWord(uint32_t Address, uint16_t Data); | FLASH_Status FLASH_ProgramHalfWord(uint32_t Address, uint16_t Data); |
| | NA | FLASH_Status FLASH_ProgramByte(uint32_t Address, uint8_t Data); |

Table 13. STM32F10x and STM32F2xx FLASH driver API correspondence (continued)

| | STM32F10x Flash driver API | STM32F2xx Flash driver API |
|---|--|---|
| Option Byte Programming | NA | void FLASH_OB_Unlock(void); |
| | NA | void FLASH_OB_Lock(void); |
| | FLASH_Status FLASH_ProgramOptionByteData(uint32_t Address, uint8_t Data); | NA |
| | FLASH_Status FLASH_EnableWriteProtection(uint32_t FLASH_Pages); | void FLASH_OB_WRPConfig(uint32_t OB_WRP, FunctionalState NewState); |
| | FLASH_Status FLASH_ReadOutProtection(FunctionalState NewState); | void FLASH_OB_RDPCConfig(uint8_t OB_RDP); |
| | FLASH_Status FLASH_UserOptionByteConfig(uint16_t OB_IWDG, uint16_t OB_STOP, uint16_t OB_STDBY); | void FLASH_OB_UserConfig(uint8_t OB_IWDG, uint8_t OB_STOP, uint8_t OB_STDBY); |
| | NA | void FLASH_OB_BORConfig(uint8_t OB_BOR); |
| | NA | FLASH_Status FLASH_OB_Launch(void); |
| | uint32_t FLASH_GetUserOptionByte(void); | uint8_t FLASH_OB_GetUser(void); |
| | uint32_t FLASH_GetWriteProtectionOptionByte(void); | uint16_t FLASH_OB_GetWRP(void); |
| | FlagStatus FLASH_GetReadOutProtectionStatus(void); | FlagStatus FLASH_OB_GetRDP(void); |
| | NA | uint8_t FLASH_OB_GetBOR(void); |
| FLAG management | FlagStatus FLASH_GetFlagStatus(uint32_t FLASH_FLAG); | FlagStatus FLASH_GetFlagStatus(uint32_t FLASH_FLAG); |
| | void FLASH_ClearFlag(uint32_t FLASH_FLAG); | void FLASH_ClearFlag(uint32_t FLASH_FLAG); |
| | FLASH_Status FLASH_GetStatus(void); | FLASH_Status FLASH_GetStatus(void); |
| | FLASH_Status FLASH_WaitForLastOperation(uint32_t Timeout); | FLASH_Status FLASH_WaitForLastOperation(void); |
| | FlagStatus FLASH_GetPrefetchBufferStatus(void); | NA |
| <p>Color key:</p> <ul style="list-style-type: none"> = New function = Same function, but API was changed = Function not available (NA) | | |

4.4 GPIO

This section explain how to update the configuration of the different GPIO modes when moving the application code from STM32 F1 series to F2 series.

4.4.1 Output mode

The example below shows how to configure an I/O in output mode (for example to drive an LED) in STM32 F1 series:

```
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_x;
GPIO_InitStructure.GPIO_Speed = GPIO_Speed_xxMHz; /* 2, 10 or 50 MHz */
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_Out_PP;
GPIO_Init(GPIOy, &GPIO_InitStructure);
```

In F2 series you have to update this code as follows:

```
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_x;
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_OUT;
GPIO_InitStructure.GPIO_OType = GPIO_OType_PP; /* Push-pull or open drain */
GPIO_InitStructure.GPIO_PuPd = GPIO_PuPd_UP; /* None, Pull-up or pull-down */
GPIO_InitStructure.GPIO_Speed = GPIO_Speed_xxMHz; /* 2, 25, 50 or 100 MHz */
GPIO_Init(GPIOy, &GPIO_InitStructure);
```

4.4.2 Input mode

The example below shows how to configure an I/O in input mode (for example to be used as an EXTI line) in STM32 F1 series:

```
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_x;
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_IN_FLOATING;
GPIO_Init(GPIOy, &GPIO_InitStructure);
```

In F2 series you have to update this code as follows:

```
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_x;
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_IN;
GPIO_InitStructure.GPIO_PuPd = GPIO_PuPd_NOPULL; /* None, Pull-up or pull-down */
GPIO_Init(GPIOy, &GPIO_InitStructure);
```

4.4.3 Analog mode

The example below shows how to configure an I/O in analog mode (for example an ADC or DAC channel) in STM32 F1 series:

```
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_x;
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_AIN;
GPIO_Init(GPIOy, &GPIO_InitStructure);
```

In F2 series you have to update this code as follows:

```
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_x ;
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_AIN;
GPIO_InitStructure.GPIO_PuPd = GPIO_PuPd_NOPULL ;
GPIO_Init(GPIOy, &GPIO_InitStructure);
```

4.4.4 Alternate function mode

In STM32 F1 series

1. The configuration to use an I/O as alternate function depends on the peripheral mode used. For example, the USART Tx pin should be configured as alternate function push-pull while the USART Rx pin should be configured as input floating or input pull-up.
2. To optimize the number of peripherals available in MCUs that have fewer pins (smaller package size), it is possible by software to remap some alternate functions to other

pins. for example the USART2_RX pin can be mapped on PA3 (default remap) or PD6 (done through software remap) pin.

In STM32 F2 series

1. Whatever the peripheral mode used, the I/O must be configured as alternate function, then the system can use the I/O in the proper way (input or output).
2. The I/O pins are connected to onboard peripherals/modules through a multiplexer that allows only one peripheral's alternate function to be connected to an I/O pin at a time. In this way, there can be no conflict between peripherals sharing the same I/O pin. Each I/O pin has a multiplexer with sixteen alternate function inputs (AF0 to AF15) that can be configured through the GPIO_PinAFConfig () function:
 - After reset all I/Os are connected to the system's alternate function 0 (AF0)
 - The peripherals' alternate functions are mapped from AF1 to AF13
 - Cortex-M3 EVENTOUT is mapped on AF15
3. In addition to this flexible I/O multiplexing architecture, each peripheral has alternate functions mapped onto different I/O pins to optimize the number of peripheral I/O functions for different device packages. For example, the USART2_RX pin can be mapped on PA3 or PD6 pin
4. Configuration procedure
 - Connect the pin to the desired peripherals' Alternate Function (AF) using GPIO_PinAFConfig() function
 - Use GPIO_Init() function to configure the I/O pin:
 - Configure the desired pin in alternate function mode using GPIO_InitStructure->GPIO_Mode = GPIO_Mode_AF;
 - Select the type, pull-up/pull-down and output speed via GPIO_PuPd, GPIO_OType and GPIO_Speed members

The example below shows how to remap USART2 Tx/Rx I/Os on PD5/PD6 pins in STM32 F1 series:

```

/* Enable APB2 interface clock for GPIOD and AFIO (AFIO peripheral is used
   to configure the I/Os software remapping) */
RCC_APB2PeriphClockCmd(RCC_APB2Periph_GPIOD | RCC_APB2Periph_AFIO, ENABLE);

/* Enable USART2 I/Os software remapping [(USART2_Tx,USART2_Rx):(PD5,PD6)] */
GPIO_PinRemapConfig(GPIO_Remap_USART2, ENABLE);

/* Configure USART2_Tx as alternate function push-pull */
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_5;
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_AF_PP;
GPIO_InitStructure.GPIO_Speed = GPIO_Speed_50MHz;
GPIO_Init(GPIOD, &GPIO_InitStructure);

/* Configure USART2_Rx as input floating */
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_6;
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_IN_FLOATING;
GPIO_Init(GPIOD, &GPIO_InitStructure);

```

In F2 series you have to update this code as follows:

```

/* Enable GPIOD's AHB interface clock */
RCC_AHB1PeriphClockCmd(RCC_AHB1Periph_GPIOD, ENABLE);

/* Select USART2 I/Os mapping on PD5/6 pins [(USART2_TX,USART2_RX):(PD5,PD6)] */
/* Connect PD5 to USART2_Tx */

```

```

GPIO_PinAFConfig(GPIOD, GPIO_PinSource5, GPIO_AF_USART2);
/* Connect PD6 to USART2_Rx*/
GPIO_PinAFConfig(GPIOD, GPIO_PinSource6, GPIO_AF_USART2);

/* Configure USART2_Tx and USART2_Rx as alternate function */
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_5 | GPIO_Pin_6;
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_AF;
GPIO_InitStructure.GPIO_Speed = GPIO_Speed_50MHz;
GPIO_InitStructure.GPIO_OType = GPIO_OType_PP;
GPIO_InitStructure.GPIO_PuPd = GPIO_PuPd_UP;
GPIO_Init(GPIOD, &GPIO_InitStructure);

```

Note: *When the I/O speed is configured in 50 MHz or 100 MHz mode, it is recommended to use the compensation cell for slew rate control to reduce the I/O noise on the power supply.*

4.5 EXTI

The example below shows how to configure the PA0 pin to be used as EXTI Line0 in STM32 F1 series:

```

/* Enable APB interface clock for GPIOA and AFIO */
RCC_APB2PeriphClockCmd(RCC_APB2Periph_GPIOA | RCC_APB2Periph_AFIO, ENABLE);

/* Configure PA0 pin in input mode */
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_0;
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_IN_FLOATING;
GPIO_Init(GPIOA, &GPIO_InitStructure);

/* Connect EXTI Line0 to PA0 pin */
GPIO_EXTILineConfig(GPIO_PortSourceGPIOA, GPIO_PinSource0);

/* Configure EXTI line0 */
EXTI_InitStructure.EXTI_Line = EXTI_Line0;
EXTI_InitStructure.EXTI_Mode = EXTI_Mode_Interrupt;
EXTI_InitStructure.EXTI_Trigger = EXTI_Trigger_Falling;
EXTI_InitStructure.EXTI_LineCmd = ENABLE;
EXTI_Init(&EXTI_InitStructure);

```

In F2 series the configuration of the EXTI line source pin is performed in the SYSCFG peripheral (instead of AFIO in F1 series). As result, the source code should be updated as follows:

```

/* Enable GPIOA's AHB interface clock */
RCC_AHB1PeriphClockCmd(RCC_AHB1Periph_GPIOA, ENABLE);
/* Enable SYSCFG's APB interface clock */
RCC_APB2PeriphClockCmd(RCC_APB2Periph_SYSCFG, ENABLE);

/* Configure PA0 pin in input mode */
GPIO_InitStructure.GPIO_Pin = GPIO_Pin_0;
GPIO_InitStructure.GPIO_Mode = GPIO_Mode_IN;
GPIO_InitStructure.GPIO_PuPd = GPIO_PuPd_NOPULL;
GPIO_Init(GPIOA, &GPIO_InitStructure);

/* Connect EXTI Line0 to PA0 pin */
SYSCFG_EXTILineConfig(EXTI_PortSourceGPIOA, EXTI_PinSource0);

/* Configure EXTI line0 */
EXTI_InitStructure.EXTI_Line = EXTI_Line0;
EXTI_InitStructure.EXTI_Mode = EXTI_Mode_Interrupt;
EXTI_InitStructure.EXTI_Trigger = EXTI_Trigger_Falling;
EXTI_InitStructure.EXTI_LineCmd = ENABLE;
EXTI_Init(&EXTI_InitStructure);

```

4.6 DMA

This section shows through an example how to port existing code from STM32 F1 series to F2 series.

The example below shows how to configure the DMA to transfer continuously converted data from ADC1 to SRAM memory in STM32 F1 series:

```
#define ADC1_DR_ADDRESS    ((uint32_t)0x4001244C)
...
uint16_t ADCConvertedValue = 0;

...
/* Enable DMA1's AHB interface clock */
RCC_AHBPeriphClockCmd(RCC_AHBPeriph_DMA1, ENABLE);

/* Configure DMA1 channel1 to transfer, in circular mode, the converted data from
ADC1 DR register to the ADCConvertedValue variable */
DMA_InitStructure.DMA_PeripheralBaseAddr = ADC1_DR_Address;
DMA_InitStructure.DMA_MemoryBaseAddr = (uint32_t)&ADCConvertedValue;
DMA_InitStructure.DMA_DIR = DMA_DIR_PeripheralSRC;
DMA_InitStructure.DMA_BufferSize = 1;
DMA_InitStructure.DMA_PeripheralInc = DMA_PeripheralInc_Disable;
DMA_InitStructure.DMA_MemoryInc = DMA_MemoryInc_Disable;
DMA_InitStructure.DMA_PeripheralDataSize = DMA_PeripheralDataSize_HalfWord;
DMA_InitStructure.DMA_MemoryDataSize = DMA_MemoryDataSize_HalfWord;
DMA_InitStructure.DMA_Mode = DMA_Mode_Circular;
DMA_InitStructure.DMA_Priority = DMA_Priority_High;
DMA_InitStructure.DMA_M2M = DMA_M2M_Disable;
DMA_Init(DMA1_Channel1, &DMA_InitStructure);

/* Enable DMA1 channel1 */
DMA_Cmd(DMA1_Channel1, ENABLE);
```

In F2 series you have to update this code as follows:

```
#define ADC1_DR_ADDRESS    ((uint32_t)0x4001204C)
...
uint16_t ADCConvertedValue = 0;

...
/* Enable DMA2's AHB1 interface clock */
RCC_AHB1PeriphClockCmd(RCC_AHB1Periph_DMA2, ENABLE);

/* Configure DMA2 Stream0 channel0 to transfer, in circular mode, the converted
data from ADC1 DR register to the ADCConvertedValue variable */
DMA_InitStructure.DMA_Channel = DMA_Channel_0;
DMA_InitStructure.DMA_PeripheralBaseAddr = ADC1_DR_ADDRESS;
DMA_InitStructure.DMA_Memory0BaseAddr = (uint32_t)&ADCConvertedValue;
DMA_InitStructure.DMA_DIR = DMA_DIR_PeripheralToMemory;
DMA_InitStructure.DMA_BufferSize = 1;
DMA_InitStructure.DMA_PeripheralInc = DMA_PeripheralInc_Disable;
DMA_InitStructure.DMA_MemoryInc = DMA_MemoryInc_Disable;
DMA_InitStructure.DMA_PeripheralDataSize = DMA_PeripheralDataSize_HalfWord;
DMA_InitStructure.DMA_MemoryDataSize = DMA_MemoryDataSize_HalfWord;
DMA_InitStructure.DMA_Mode = DMA_Mode_Circular;
DMA_InitStructure.DMA_Priority = DMA_Priority_High;
DMA_InitStructure.DMA_FIFOMode = DMA_FIFOMode_Disable;
DMA_InitStructure.DMA_FIFOThreshold = DMA_FIFOThreshold_HalfFull;
DMA_InitStructure.DMA_MemoryBurst = DMA_MemoryBurst_Single;
DMA_InitStructure.DMA_PeripheralBurst = DMA_PeripheralBurst_Single;
DMA_Init(DMA2_Stream0, &DMA_InitStructure);

/* Enable DMA2 Stream0 */
```

```
DMA_Cmd(DMA2_Stream0, ENABLE);
```

The source code changes in DMA_InitStructure members are indicated in **Bold** and **BoldItalic**:

1. The structure members indicated in **Bold** were added vs. STM32 F1 series and used to configure the DMA FIFO mode and its Threshold, Burst mode for source and/or destination.
2. The name of the structure members indicated in **BoldItalic** were changed vs. STM32 F1 series
 - a) In *STM32F2xx* Library the name of “DMA_MemoryBaseAddr” member was changed to “DMA_Memory**0**BaseAddr”, since the DMA is able to manage two buffers for data transfer:
 - “DMA_Memory**0**BaseAddr”: specifies the memory base address for DMAy Streamx, it’s the default memory used when double buffer mode is not enabled.
 - “DMA_Memory**1**BaseAddr”: specifies the base address of the second buffer, when buffer mode is enabled.
 - b) In *STM32F2xx* Library the possible values of “DMA_DIR” member were changed to “DMA_DIR_PeripheralToMemory”, “DMA_DIR_MemoryToPeripheral” and “DMA_DIR_MemoryToMemory”.

4.7 ADC

This section gives an example of how to port existing code from STM32 F1 series to F2 series.

The example below shows how to configure the ADC1 to continuously convert channel14 in STM32 F1 series:

```
...
/* ADCCLK = PCLK2/4 */
RCC_ADCClockConfig(RCC_PCLK2_Div4);

/* Enable ADC's APB interface clock */
RCC_APB2PeriphClockCmd(RCC_APB2Periph_ADC1, ENABLE);

/* Configure ADC1 to convert continuously channel14 */
ADC_InitStructure.ADC_Mode = ADC_Mode_Independent;
ADC_InitStructure.ADC_ScanConvMode = ENABLE;
ADC_InitStructure.ADC_ContinuousConvMode = ENABLE;
ADC_InitStructure.ADC_ExternalTrigConv = ADC_ExternalTrigConv_None;
ADC_InitStructure.ADC_DataAlign = ADC_DataAlign_Right;
ADC_InitStructure.ADC_NbrOfChannel = 1;
ADC_Init(ADC1, &ADC_InitStructure);
/* ADC1 regular channel14 configuration */
ADC_RegularChannelConfig(ADC1, ADC_Channel_14, 1, ADC_SampleTime_55Cycles5);

/* Enable ADC1's DMA interface */
ADC_DMACmd(ADC1, ENABLE);

/* Enable ADC1 */
ADC_Cmd(ADC1, ENABLE);

/* Enable ADC1 reset calibration register */
ADC_ResetCalibration(ADC1);
/* Check the end of ADC1 reset calibration register */
while(ADC_GetResetCalibrationStatus(ADC1));
```

```

/* Start ADC1 calibration */
ADC_StartCalibration(ADC1);
/* Check the end of ADC1 calibration */
while(ADC_GetCalibrationStatus(ADC1));

/* Start ADC1 Software Conversion */
ADC_SoftwareStartConvCmd(ADC1, ENABLE);
...

```

In F2 series you have to update this code as follows:

```

...
/* Enable ADC's APB interface clock */
RCC_APB2PeriphClockCmd(RCC_APB2Periph_ADC1, ENABLE);

/* Common configuration (applicable for the three ADCs) *****/
/* Single ADC mode */
ADC_CommonInitStructure.ADC_Mode = ADC_Mode_Independent;
/* ADCCLK = PCLK2/2 */
ADC_CommonInitStructure.ADC_Prescaler = ADC_Prescaler_Div2;
/* Available only for multi ADC mode */
ADC_CommonInitStructure.ADC_DMAAccessMode = ADC_DMAAccessMode_Disabled;
/* Delay between 2 sampling phases */
ADC_CommonInitStructure.ADC_TwoSamplingDelay = ADC_TwoSamplingDelay_5Cycles;
ADC_CommonInit(&ADC_CommonInitStructure);

/* Configure ADC1 to convert continuously channel14 *****/
ADC_InitStructure.ADC_Resolution = ADC_Resolution_12b;
ADC_InitStructure.ADC_ScanConvMode = DISABLE;
ADC_InitStructure.ADC_ContinuousConvMode = ENABLE;
ADC_InitStructure.ADC_ExternalTrigConvEdge = ADC_ExternalTrigConvEdge_None;
ADC_InitStructure.ADC_DataAlign = ADC_DataAlign_Right;
ADC_InitStructure.ADC_NbrOfConversion = 1;
ADC_Init(ADC1, &ADC_InitStructure);
/* ADC1 regular channel14 configuration */
ADC_RegularChannelConfig(ADC1, ADC_Channel_14, 1, ADC_SampleTime_3Cycles);

/* Enable DMA request after last transfer (Single-ADC mode) */
ADC_DMARRequestAfterLastTransferCmd(ADC1, ENABLE);

/* Enable ADC1's DMA interface */
ADC_DMACmd(ADC1, ENABLE);

/* Enable ADC1 */
ADC_Cmd(ADC1, ENABLE);

/* Start ADC1 Software Conversion */
ADC_SoftwareStartConv(ADC1);
...

```

The main changes in the source code/procedure in F2 series vs. F1 are described below:

1. ADC configuration is done by two functions: `ADC_CommonInit()` and `ADC_Init()`. The `ADC_CommonInit()` function is used to configure parameters common to the three ADCs, including the ADC analog clock prescaler.
2. To enable the generation of DMA requests continuously at the end of the last DMA transfer, the `ADC_DMARRequestAfterLastTransferCmd()` function should be used.
3. No calibration is needed.

4.8 Backup data registers

In STM32 F1 series the Backup data registers are managed through the BKP peripheral, while in F2 series they are a part of the RTC peripheral (there is no BKP peripheral).

The example below shows how to write to/read from Backup data registers in STM32 F1 series:

```
uint16_t BKPdata = 0;

...
/* Enable APB2 interface clock for PWR and BKP */
RCC_APB1PeriphClockCmd(RCC_APB1Periph_PWR | RCC_APB1Periph_BKP, ENABLE);

/* Enable write access to Backup domain */
PWR_BackupAccessCmd(ENABLE);

/* Write data to Backup data register 1 */
BKP_WriteBackupRegister(BKP_DR1, 0x3210);

/* Read data from Backup data register 1 */
BKPdata = BKP_ReadBackupRegister(BKP_DR1);
```

In F2 series you have to update this code as follows:

```
uint16_t BKPdata = 0;

...
/* PWR Clock Enable */
RCC_APB1PeriphClockCmd(RCC_APB1Periph_PWR, ENABLE);

/* Enable write access to Backup domain */
PWR_RTCAccessCmd(ENABLE);

/* Write data to Backup data register 1 */
RTC_WriteBackupRegister(RTC_BKP_DR1, 0x3220);

/* Read data from Backup data register 1 */
BKPdata = RTC_ReadBackupRegister(RTC_BKP_DR1);
```

The main changes in the source code in F2 series vs. F1 are described below:

1. There is no BKP peripheral
2. Write to/read from Backup data registers are done through RTC driver
3. Backup data registers naming changed from BKP_DRx to RTC_BKP_DRx, and numbering starts from 0 instead of 1

4.9 Miscellaneous

4.9.1 Ethernet PHY interface selection

In STM32 F1 series the Ethernet PHY interface selection is made in the AFIO peripheral, while in F2 series this configuration is made in the SYSCFG peripheral.

The example below shows how to configure the Ethernet PHY interface in STM32 F1 series:

```
/* Configure Ethernet MAC for connection with an MII PHY */
GPIO_ETH_MediaInterfaceConfig(GPIO_ETH_MediaInterface_MII);
```

```
/* Configure Ethernet MAC for connection with an RMII PHY */  
GPIO_ETH_MediaInterfaceConfig(GPIO_ETH_MediaInterface_RMII);
```

In F2 series you have to update this code as follows:

```
/* Configure Ethernet MAC for connection with an MII PHY */  
SYSCFG_ETH_MediaInterfaceConfig(SYSCFG_ETH_MediaInterface_MII);  
  
/* Configure Ethernet MAC for connection with an RMII PHY */  
SYSCFG_ETH_MediaInterfaceConfig(SYSCFG_ETH_MediaInterface_RMII);
```

4.9.2 TIM2 internal trigger 1 (ITR1) remapping

The example below shows how to select USB OTG FS SOF output or ETH PTP trigger output as input for TIM2 ITR1 in STM32 F1 series:

```
/* Connect USB OTG FS SOF output to TIM2 ITR1 input */  
GPIO_PinRemapConfig(GPIO_Remap_TIM2ITR1_PTP_SOF, ENABLE);  
  
/* Connect ETH PTP trigger output to TIM2 ITR1 input */  
GPIO_PinRemapConfig(GPIO_Remap_TIM2ITR1_PTP_SOF, DISABLE);
```

In F2 series you have to update this code as follows:

```
/* Connect USB OTG FS SOF output to TIM2 ITR1 input */  
TIM_RemapConfig(TIM2, TIM2_USBFS_SOF);  
  
/* Connect ETH PTP trigger output to TIM2 ITR1 input */  
TIM_RemapConfig(TIM2, TIM2_ETH_PTP);
```

5 Revision history

Table 14. Document revision history

| Date | Revision | Changes |
|--------------|----------|-----------------|
| 20-July-2011 | 1 | Initial release |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2011 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com