



DB-960-60W

60W / 26V / 925-960 MHz PA using 1x PD57070S
The LdmoST FAMILY

General Features

- EXCELLENT THERMAL STABILITY
- COMMON SOURCE CONFIGURATION
- $P_{OUT} = 60W$ WITH 13 dB GAIN OVER 925 - 960 MHz
- 10:1 LOAD VSWR CAPABILITY
- BeO FREE AMPLIFIER


Description

The DB-960-60W is a common source N-Channel enhancement-mode lateral Field-Effect RF power amplifier designed for GSM / GPRS / EDGE base station applications.

The DB-960-60W is designed in cooperation with Européenne de Télécommunications S.A (www.etsa.fr), for high gain and broadband performance operating in common source mode at 26 V, capable of withstanding load mismatch up to 10:1 all phases and with harmonics lower than 30 dBc.

Order Code

- DB-960-60W

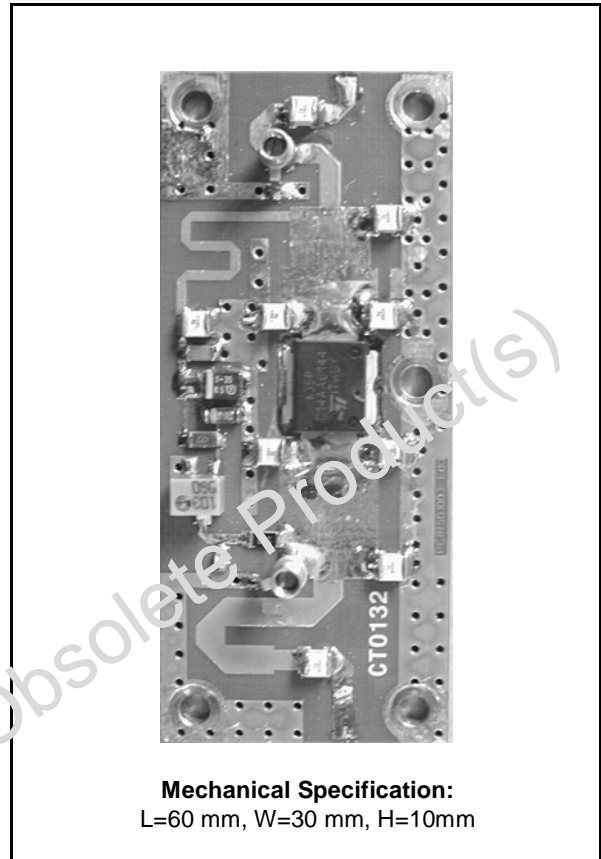

Contents

1	Electrical Data	3
1.1	Maximum Ratings	3
	Table 1. Absolute Maximum Ratings.....	3
2	Electrical Characteristics	4
	Table 2. Electrical Specification	4
3	Typical Performance	5
4	Test Circuit	6
	Table 3. Test Circuit Component Part Lis	7
5	Revision History	8

Obsolete Product(s) - Obsolete Product(s)

1 Electrical Data

1.1 Maximum Ratings

Table 1. Absolute Maximum Ratings

($T_{CASE} = 25^{\circ}C$)

Symbol	Parameter	Value	Unit
V_{DD}	Supply voltage	32	V
I_D	Drain Current	8	A
P_{DISS}	Power Dissipation	95	W
T_{CASE}	Operating Case Temperature	-20 to +85	$^{\circ}C$
P_{amb}	Max. Ambient Temperature	+55	$^{\circ}C$

2 Electrical Characteristics



($T_{amb} = +25\text{ }^{\circ}\text{C}$, $V_{dd} = 26\text{ V}$, $I_{dq} = 200\text{ mA}$)

Table 2. Electrical Specification

Symbol	Test Conditions	Min.	Typ.	Max.	Unit
FREQ.	Frequency Range	925		960	MHz
Gain	$P_{OUT} = 60\text{ W}$	13	14		dB
P_{1dB}	Over frequency range: 925 - 960 MHz	60	65		W
Flatness	Over frequency range and @ $P_{OUT} = 60\text{ W}$			+/- 0.5	dB
Flatness	P_{OUT} from 0.1 W to 60 W			1	dB
ND at P_{1dB}	P_{1dB}	45	52		%
IRTL	Input return Loss P_{OUT} from 0.1 W to 60 W		-15	-10	dB
Harmonic	$P_{OUT} = 60\text{ W}$			-30	dBc
VSWR	Load Mismatch all phases @ $P_{OUT} = 60\text{ W}$	10:1			
Spurious	10:1 VSWR all phases and P_{OUT} from 0.1 to 60 W			-76	dBc
IMD ₃	$P_{OUT} = 60\text{ WPEP}$			-25	dBc

3 Typical Performance

Figure 1. P1 dB and Efficiency vs. Frequency Figure 2. Gain vs. Frequency (Pout=60W)

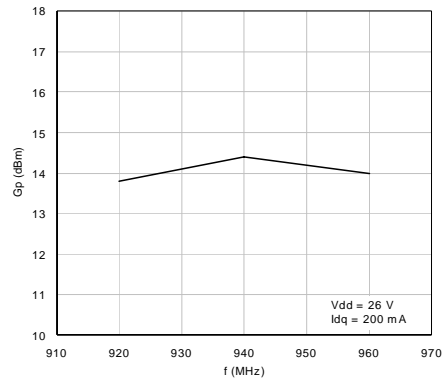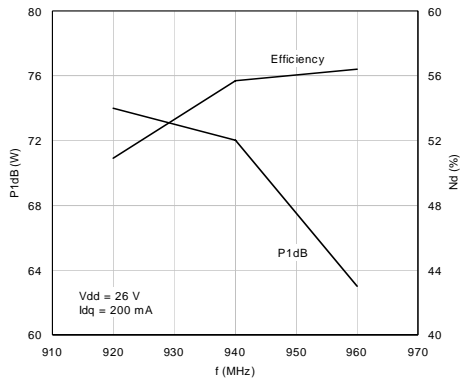

Obsolete Product(s) - Obsolete Product(s)

4 Test Circuit

Figure 3. Test Fixture Component Layout

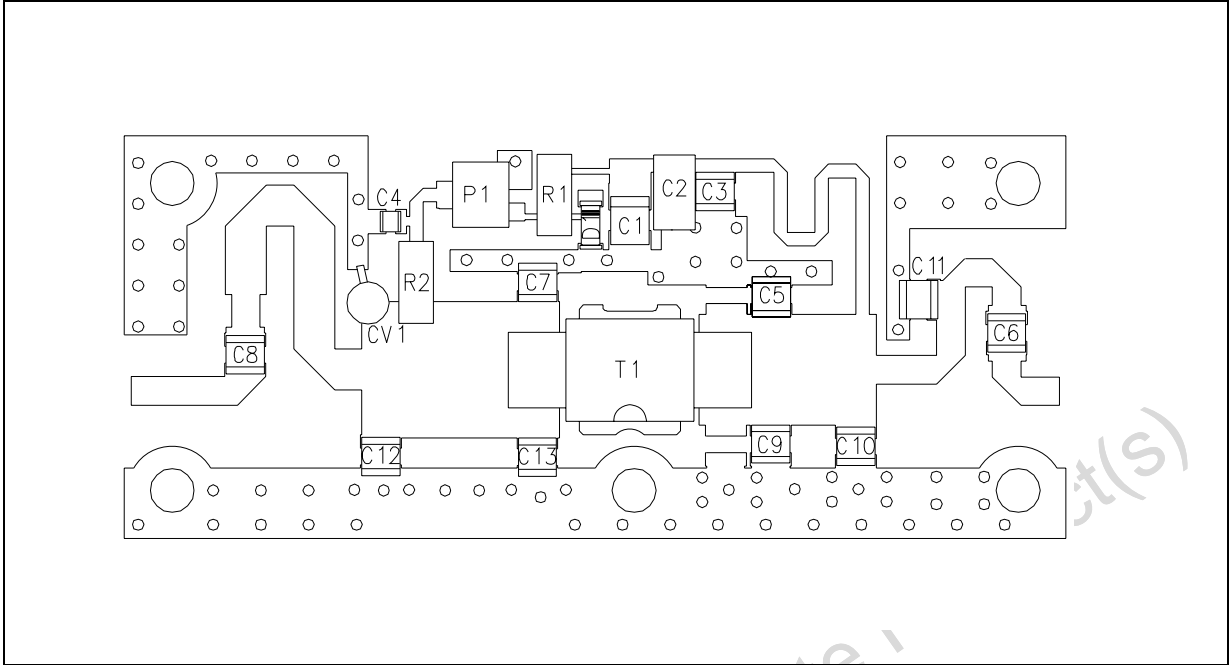


Figure 4. Test Circuit Photomaster

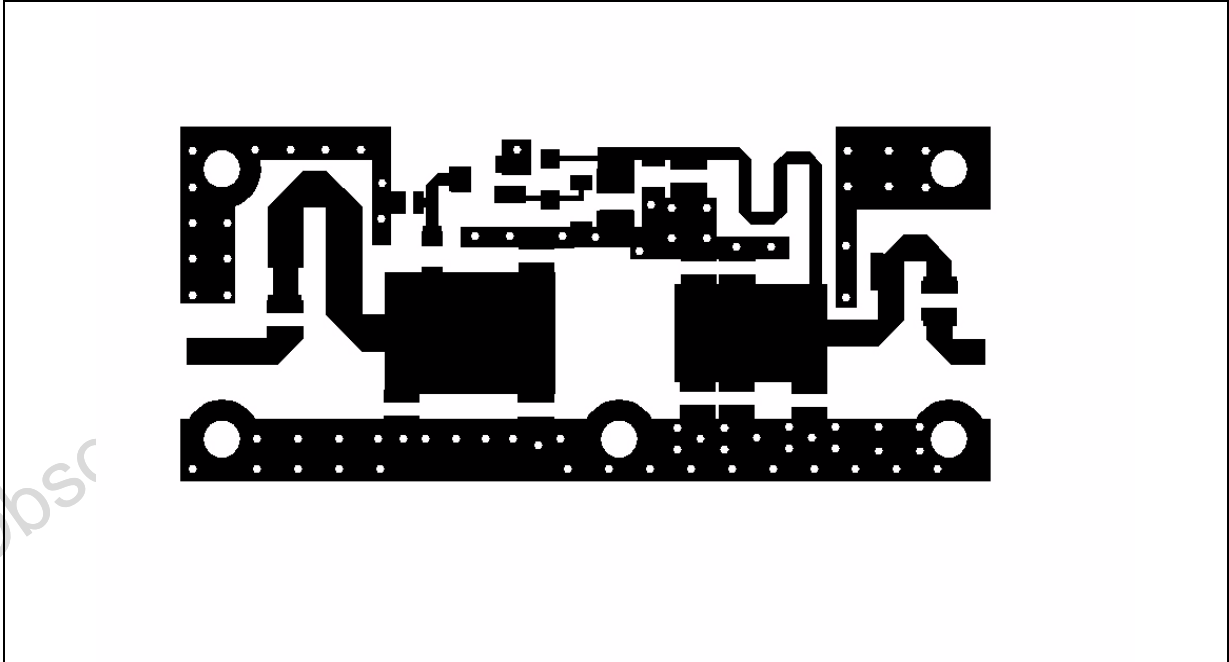


Table 3. Test Circuit Component Part Lis

Ref.	Value	Ref. Manufacturer	Manufacturer
1	RF Power Amplifier Circuit	PCIR501003	ETSA
CV1, CV2	Trim capacitor HQ 0.6-4.5pF 500V	AT27273	TECK
C4	Chip Capacitor HQ 0603 100pF TA 5% 50V	500-CHA-101-JVLE	TEKELEC
C10, C12	Chip Capacitor HQ 3.3pF TB +/- 0,25pF 500V	501-CHB-3R3-CVLE	TEKELEC
C9	Chip Capacitor HQ 8,2pF TB +/- 0,25pF 500V	501-CHB-8R2-CVLE	TEKELEC
C5, C7, C13	Chip Capacitor HQ 10pF TB 5% 500V	501-CHB-100-JVLE	TEKELEC
C6, C8	Chip Capacitor HQ 47pF TB 5% 500V	501-CHB-470-JVLE	TEKELEC
C3	Chip Capacitor HQ 100pF TB 5% 500V	501-CHB-101-JVLE	TEKELEC
C2	Capacitor 1206 100nF 63V X7R 10%	VJ1206Y104KXAT/630	VISHAY
C1	Capacitor CMS tantale 1µF 20% 35V	293D105X9035B	Vishay-Sprague
R1	Resistor CMS 4,7K 1206 1/4W 5%	27597	BOURNS
R2	Resistor CMS 10K 1206 1/4W 5%	27605	BOURNS
P1	Trim resistor CMS cermet 3224W 10K	3224W-103	BOURNS
D1	Zener Diode 5.1V 500mW SOD80	BZV55C5V1	OMNITECH
T1	RF LDMOS Transistor 28V 70W 13dB GSM	PD57070S	STMicroelectronics

5 Revision History

Date	Revision	Description of Changes
04-Nov-2005	1	First Issue.

Obsolete Product(s) - Obsolete Product(s)

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.



The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2005 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

