



BlueNRG-MESH

Overview of the BlueNRG-MESH SDK for the
ST Bluetooth Low Energy SOCs


Raffaele RIVA

Hary RADAKICHENANE



Technology Tour 2019

Toronto, Canada | May 29

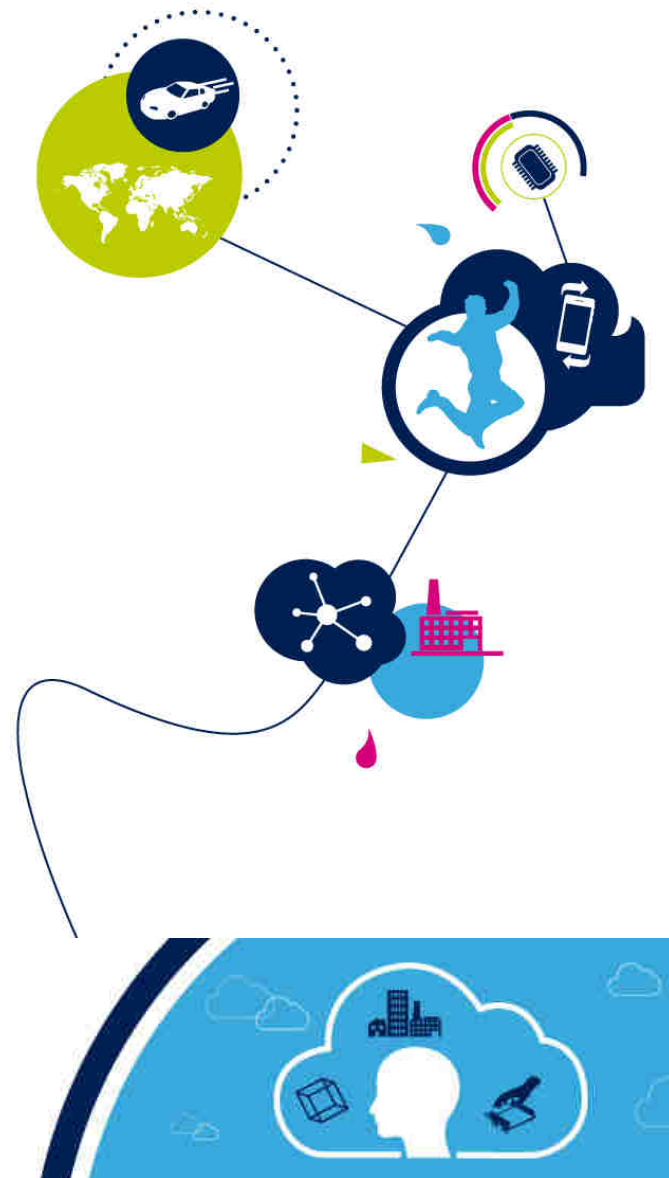

BlueNRG-Mesh



Bluetooth Mesh Basics

BlueNRG-Mesh SDK Solution

Getting started with BlueNRG-Mesh




What is the BLE Mesh?

3

July 18, 2017 - Bluetooth SIG Announces Mesh Networking Capability

Brings proven, **global interoperability** and the mature, **trusted ecosystem** of **Bluetooth technology** to industrial-grade device networks

- A **standard network protocol** to enable a communication in a mesh network topology between several nodes over multiple hops when there is not direct reachability between two nodes.
- The BLE Mesh is standardized by the **Bluetooth Core** also known as Special Interest Group (**SIG**).

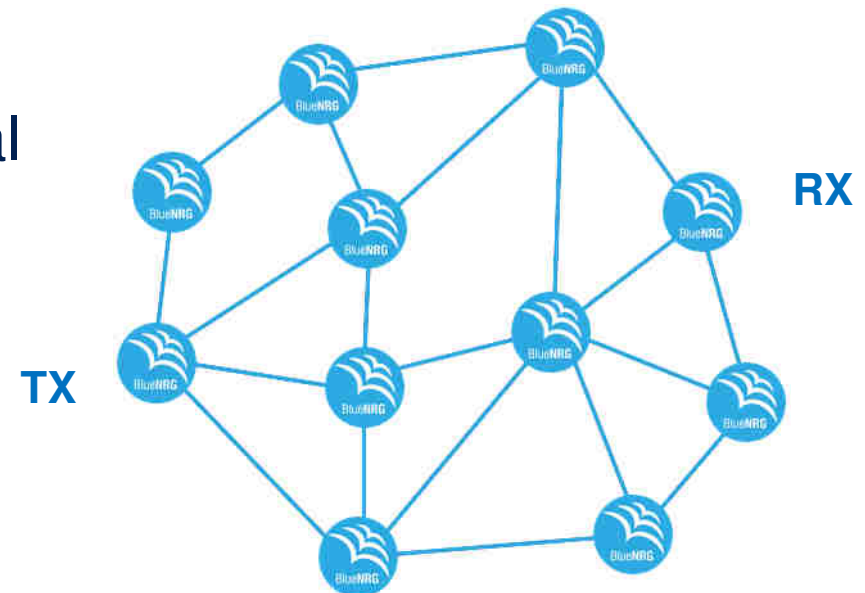

BLE MESH: backed up by industry leaders

4



companies supporting the launch
of Bluetooth mesh networking

3M

AIR
CABLE

ARM



cortet™
by CEL



GOOEE



hellohub



muRata
INNOVATOR IN ELECTRONICS

QUALCOMM



SILVAIR



TOSHIBA
Leading Innovation >>>



WISILICA



Bluetooth
5



BLE Mesh Working Group



Extending Bluetooth Capabilities

5

The Bluetooth Mesh network topology optimizes the power consumption.

PAIRING

one-to-one



**1 MASTER with
Up to 8 SLAVES**



DATA TRANSFER

- Sports & fitness devices
- Health and wellness devices
- Peripherals and accessories

BROADCASTING

one-to-many




LOCALIZED INFORMATION

- Point of interest beacons
- Item finding beacons
- Way finding beacons

NEW

MESH

many-to-many

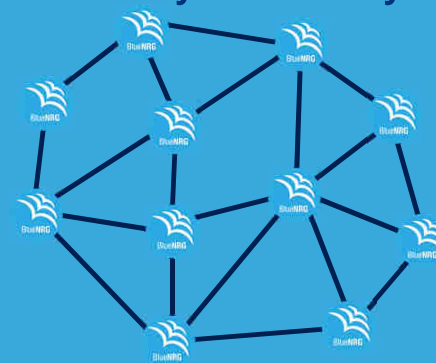

LARGE DEVICE NETWORKS

- Building automation
- Wireless sensor networks
- Asset tracking


Range of coverage depends on RF output power

Coverage extended by relaying messages over multiple hops



Bluetooth MESH vs BLE Stack

6

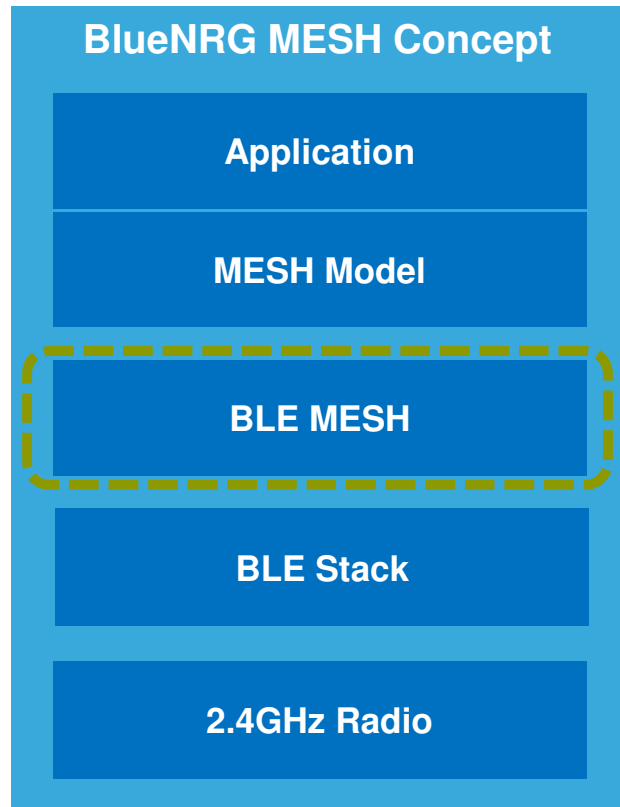

- Bluetooth Mesh runs on top of the BLE Stack
- It is not linked to BLE 5.0
- It is backward compatible with BLE 4.x

Bluetooth® Mesh Applications

7

The Bluetooth SIG MESH extends the capabilities of Bluetooth Smart chips to answer **more and more complex applications.**


The protocol has been developed with the **Smart Lighting industry** in mind.

- Lighting
 - Interface to major light IOs (ST supports DALI, PWM, etc.)
- Smart Home and Building automation
 - Heater/Fan control
 - Temperature / Shutter control
- Smart Industry
 - M2M control
- Wireless sensor networks




Source : Bluetooth® SIG


Smart Home/Building




Smart Things




Smart Industry




Bluetooth® Mesh Topology

Managed Flooding

8

The Bluetooth Mesh network mechanism is based on a **managed flooding protocol**

- **Message relay** extends the communication range (Multi-hop data transmission)
- **No single point of failure**
 - does not require any centralized operation nor coordination
 - dynamic self healing
- **Direct communication** between contiguous nodes
- **Rules to restrict** devices from **re-relaying messages**:
 - Messages contain a **Sequence Number** to **optimize the network usage and protect against replay attacks**
 - Reject messages already received
 - **TTL** (Time To Live) method:
 - Limit the number of times a message is relayed

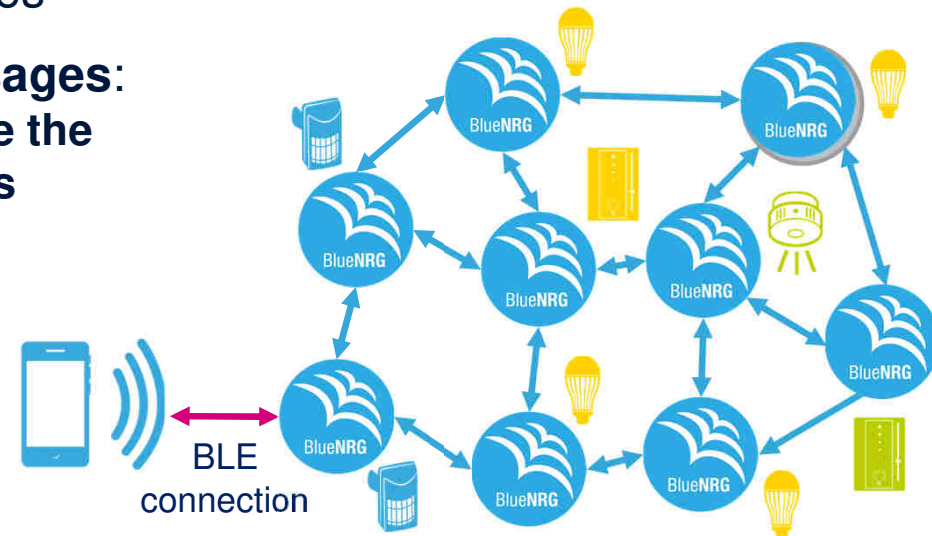



Security, Attacks and Protection

9

- The Mesh security uses a privacy mechanism called **obfuscation** through **AES** to encrypt the **header** information.
- **Messages** are **encrypted twice**. Once with an Application or device key and the second time with a Network key.
- Mesh security **protects the network against** third-party interference and monitoring: Replay/Eaves Dropping/Man-in-The-Middle **attacks**.
- Nodes can be removed from the network securely, preventing trash-can attacks, by erasing the security keys stored in the flash memory.



Security in the Bluetooth Mesh: Keys


10

- **Device Key:** Never transmitted over air
 - **Unique key** for each single device, only known by the Provisioner (i.e. Smartphone) and the device, used for provisioning, configuration and key management.
- **Network Key:** Provided by Provisioner
 - Shared across all Nodes in the network, allows a node to decrypt message's header and to relay messages throughout a network
- **Application Key:** Provided by Provisioner
 - **Different applications** have a **different “Application key”** used to **encrypt/decrypt messages payload** (application data).

Why do you need both Network Key and Application Key?

11

- The NetKey provides security/authentication for all communication at network layer
- The AppKey protects the application data. Messages can be relayed by any nodes in the network without being able to read or change the application data.
- We can't have a compromised **Door Bell** allow anybody to unlock **Door Lock**

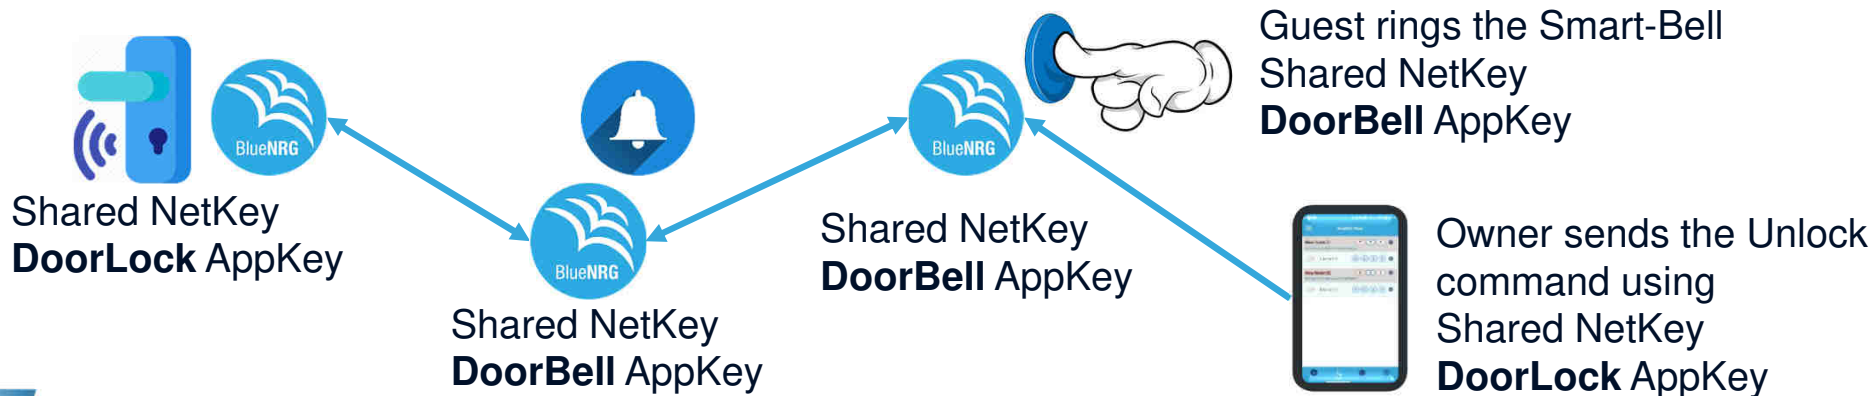


Bluetooth® Mesh for Smarter devices

How node features are exposed – two new entities: **Elements** and **Models**

12

Using Elements and Models helps **exchange messages** between a BLE device and a Smart Application (Controller) for simple **control and monitoring applications**

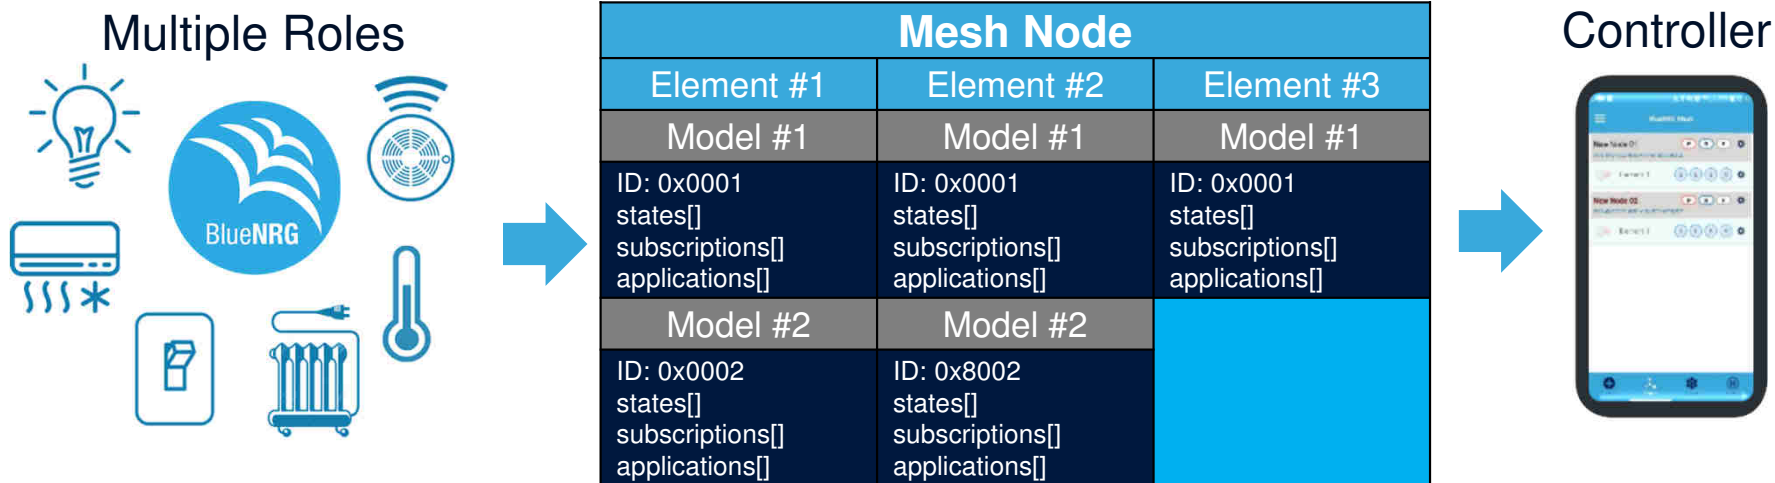

- **Elements:**


- define the functionalities of a single node (i.e. a light fixture may have two lamps, each of them is a separate element and can be independently controlled). Each element contains models

- **Models:**

- represent specific **Services** and define a set of **States and Messages** for these states; (i.e. a lamp can have the following models: **Lighting** for On/Off Control, **Vendor** for Dimming)

The mesh messaging model

Publish and Subscribe paradigm

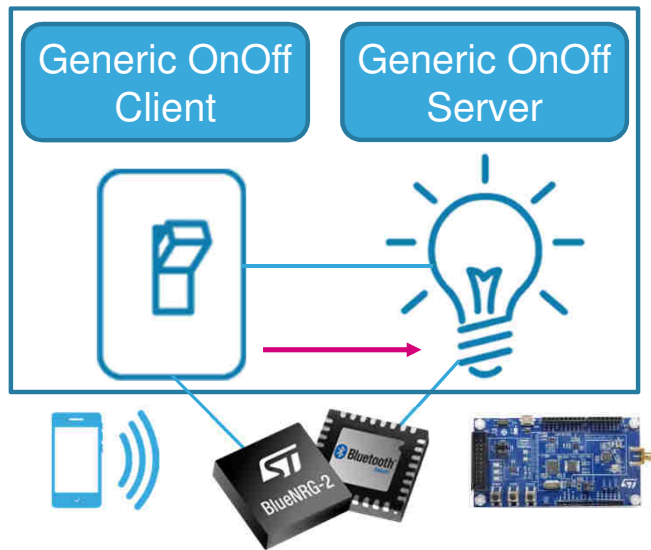


- Publish: send a message to unicast /virtual /group address
 - A **Client** device (e.g. a switch) can **publish messages** (e.g. ON/OFF control) and a **Server** device (e.g. a light bulb) can **subscribe** and be **notified** of new command arrival.
 - Also, one Node can **publish** messages to a **multicast address**, and **several nodes** can **subscribe** to such specific address.

Bluetooth® Mesh Network Topology

Nodes Types

14

To stay efficient, the BLE Mesh take advantage of a **managed flooding network** mechanism. Compared to routed protocols, it is **much more simpler** to deploy.

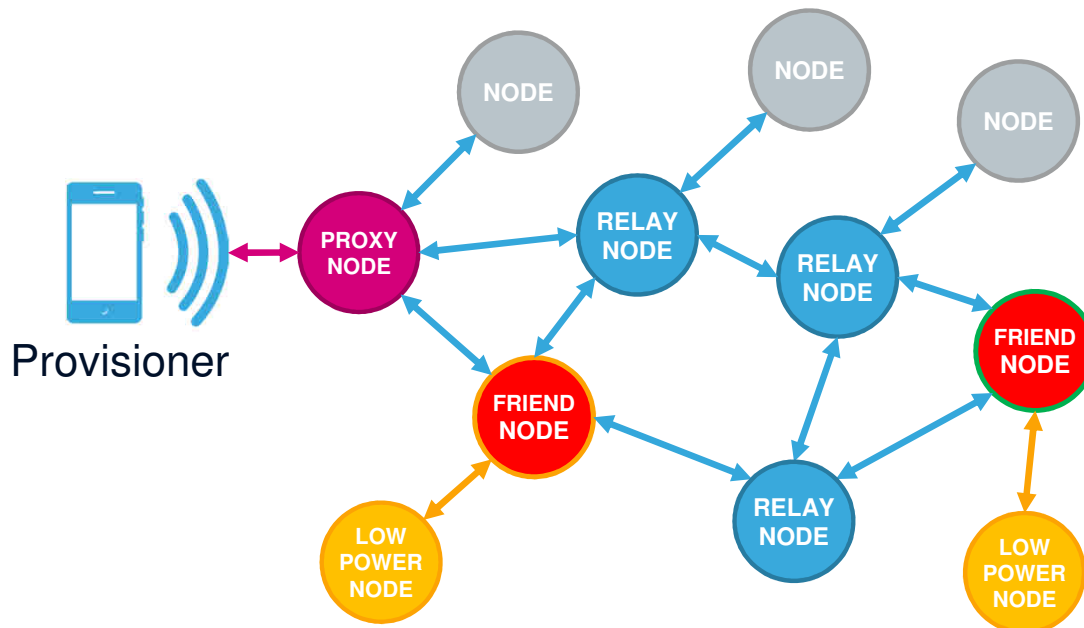


- PROXY NODE**
 - Expose the interface for Smartphone/ Tablet to interact with a mesh network
- NODE**
 - Simple leaf node whom cannot relay messages (Legacy nodes or Resource constrained nodes)
- RELAY NODE**
 - Able to retransmit received messages
 - Enable multiple “hops” in the network
- LOW POWER NODE**
 - Battery operated devices
 - Primarily send but Rarely receive messages
 - No need 100% duty cycle: mostly sleep
- FRIEND NODE**
 - Stores messages addressed to LPNs and delivers them whenever the LPN polls for “waiting messages”

Bluetooth® Mesh entities

Low Power & Friendship Node

15

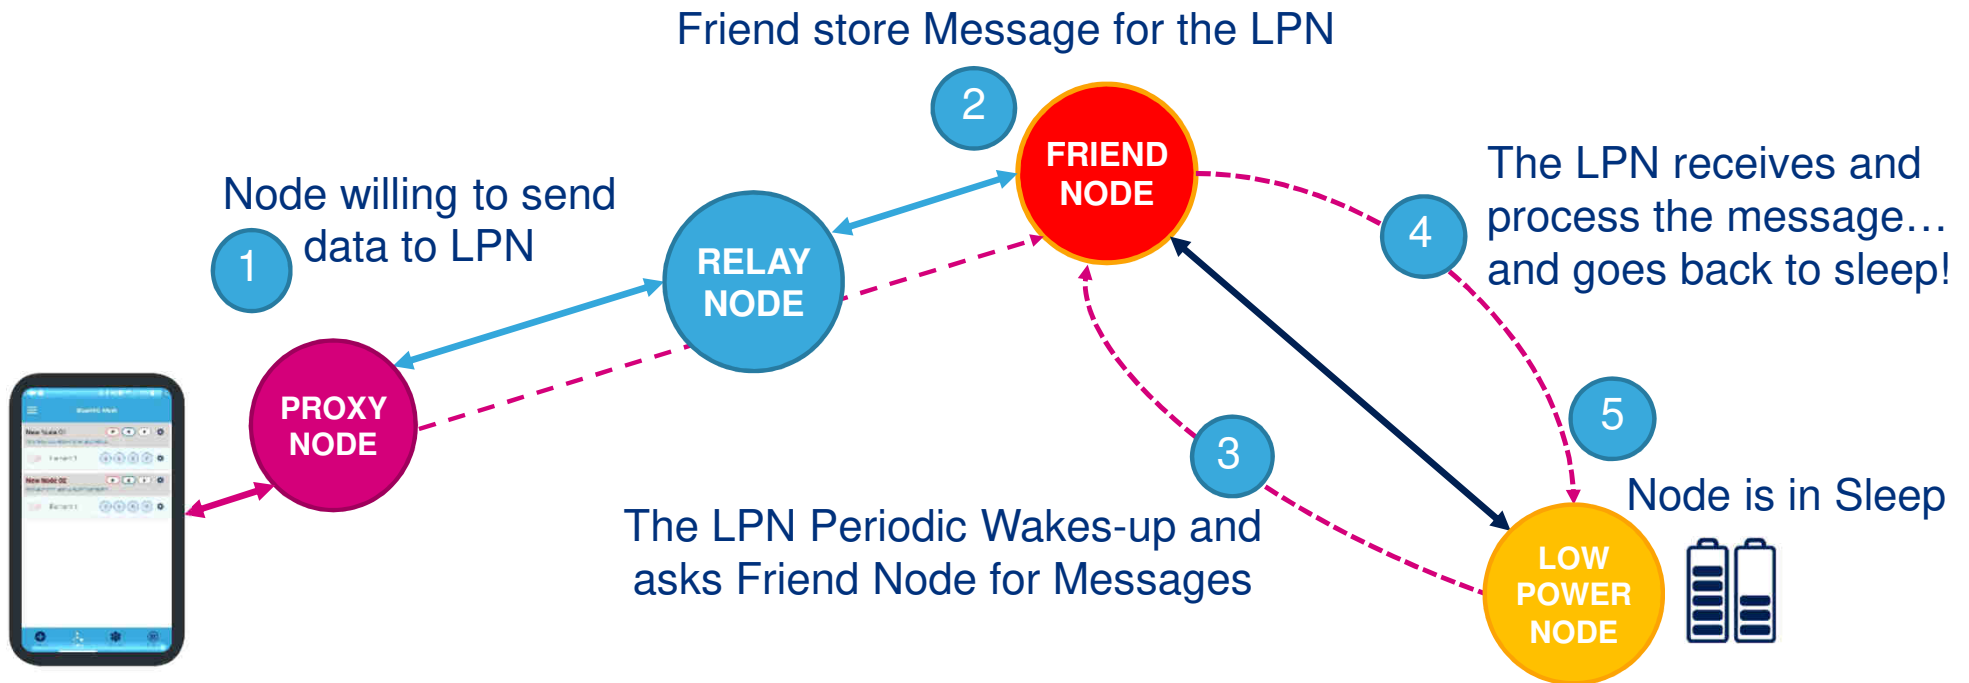


BlueNRG-Mesh

Bluetooth Mesh Basics

 BlueNRG-Mesh SDK Solution

Getting started with BlueNRG-Mesh

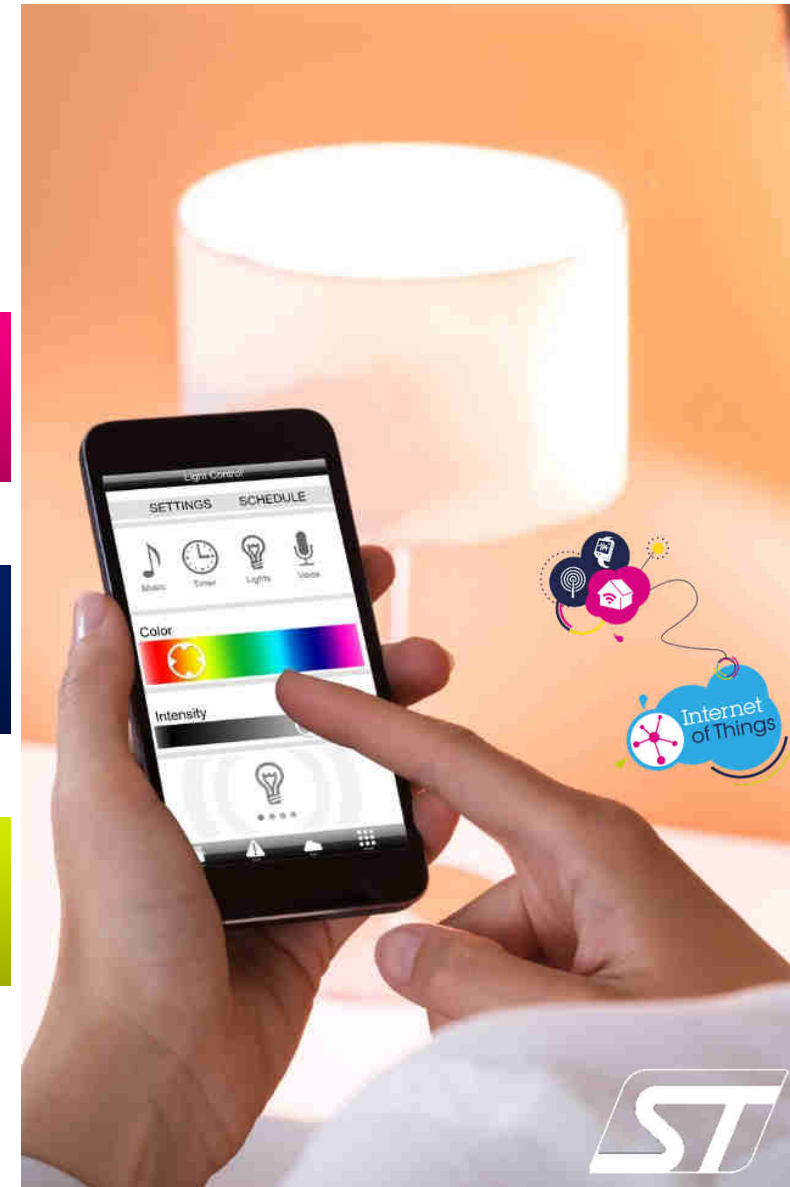



Bluetooth

ST BLE Portfolio

17




ST: the most complete BLE portfolio in the market!



BlueNRG chipset evolution

18

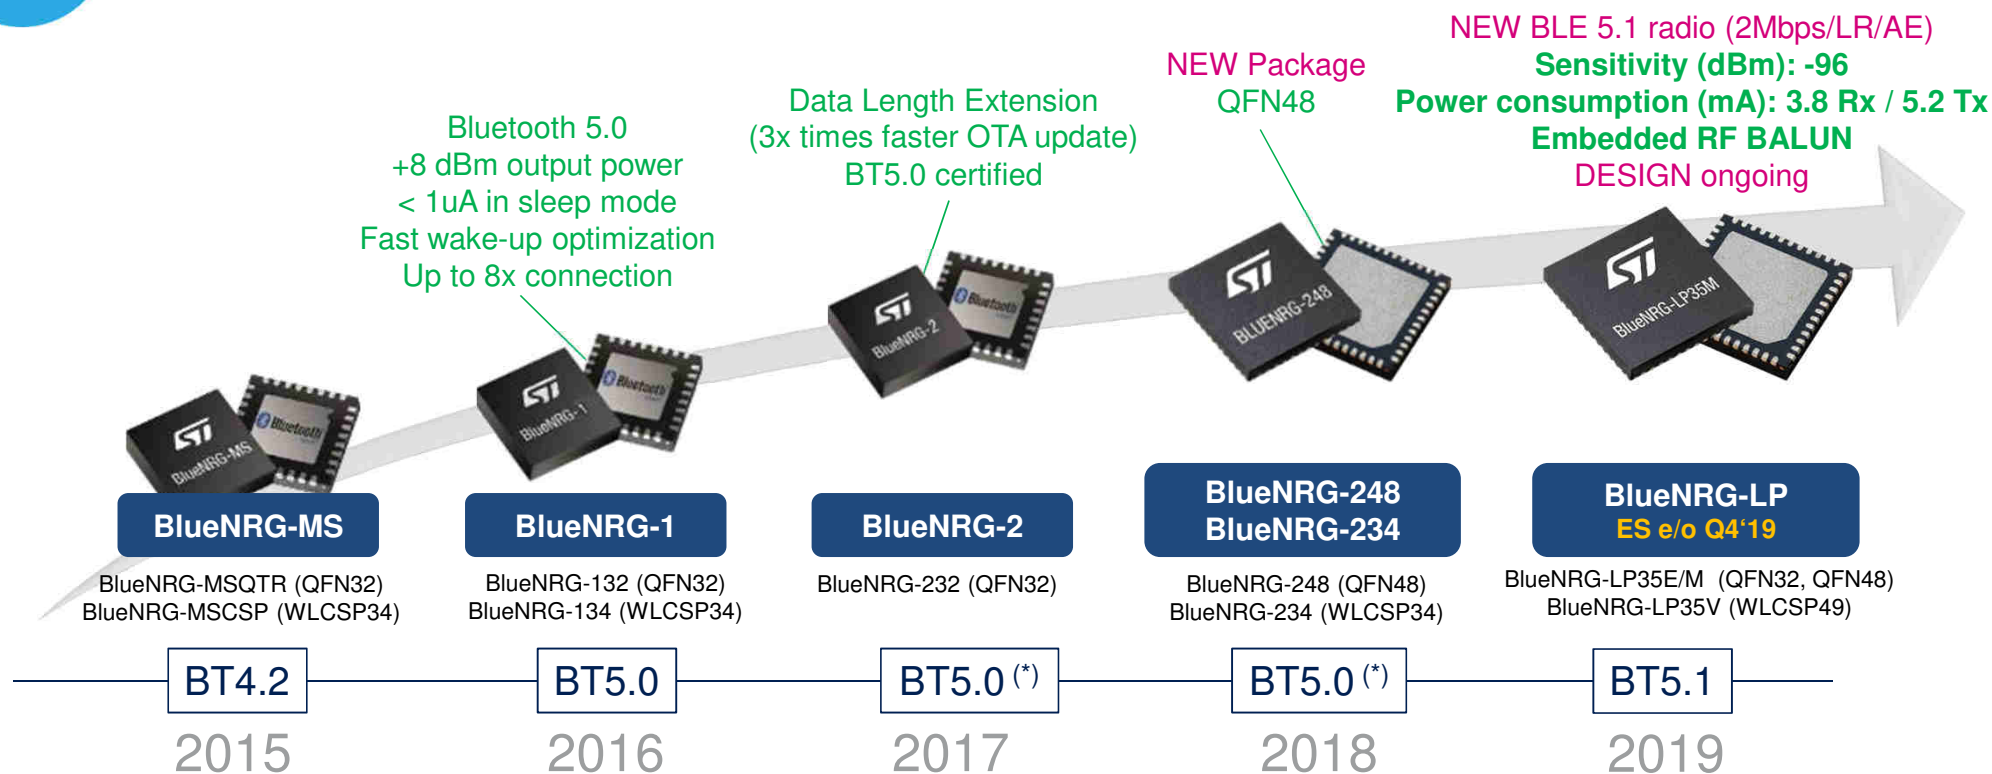

Bluetooth LE product roadmap




(*) Certified for BLE 5.0. It does not support other optional BLE 5.0 features like 2 Mbit/s, Long Range and Advertising Extensions.



BlueNRG Certified Modules Portfolio

19

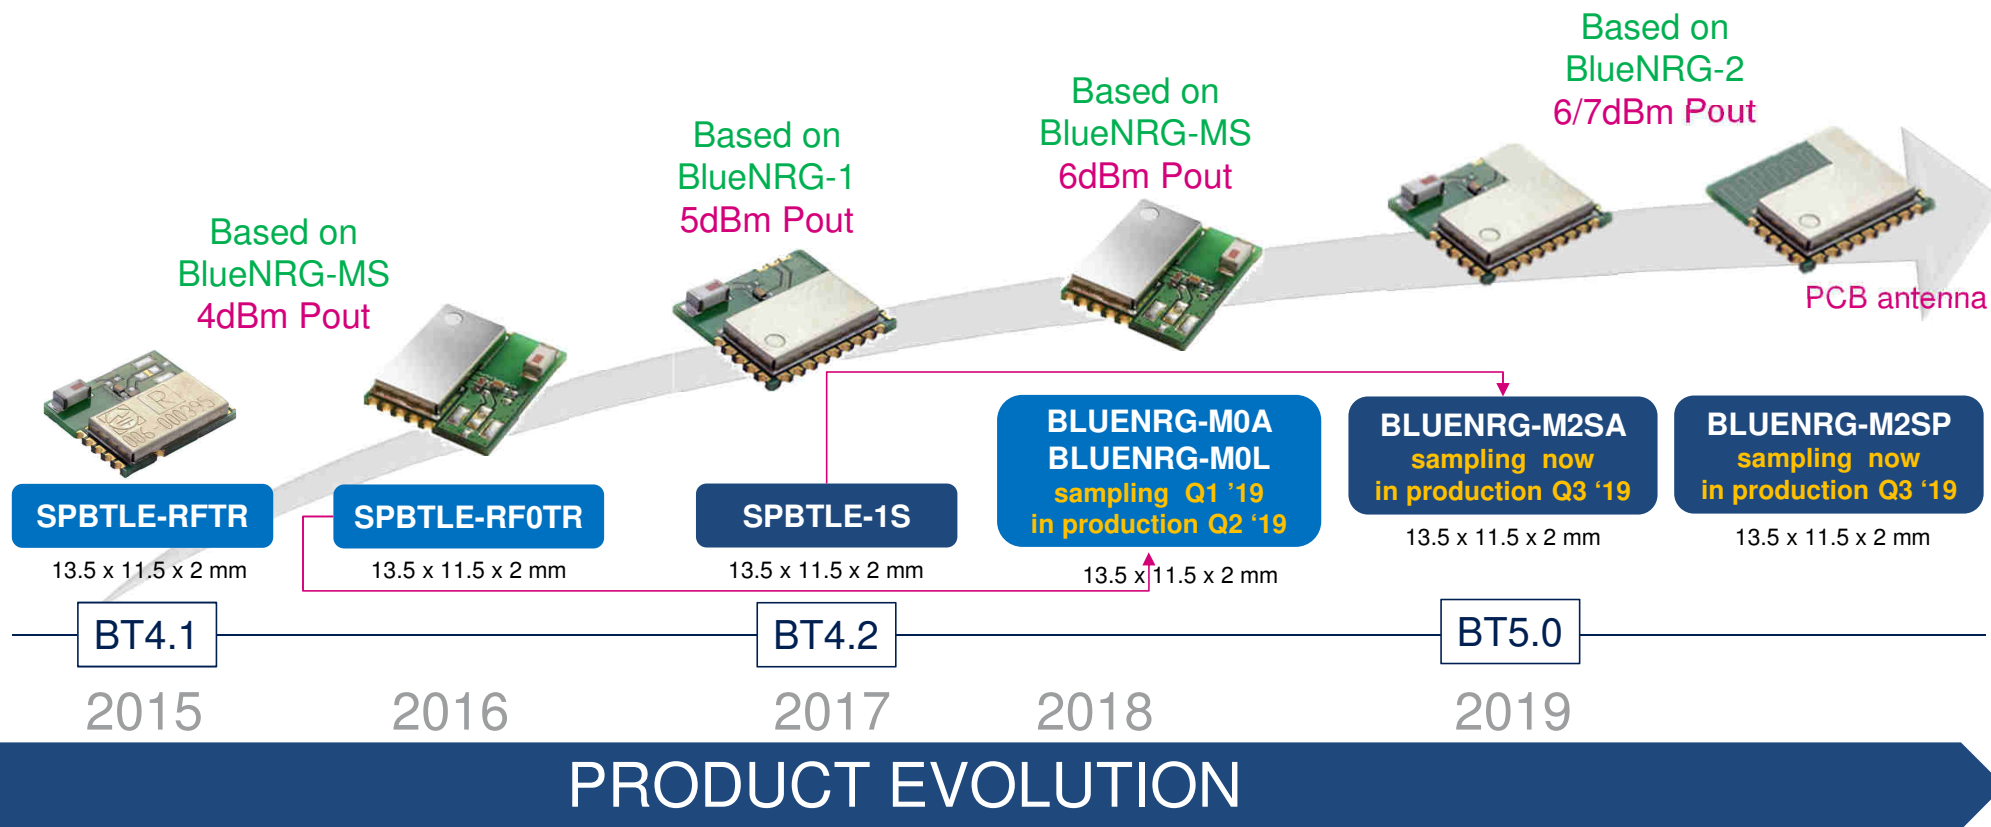



- SDK
 - **Firmware, Android and iOS app sources**
 - **www.st.com/blemesh**

- **ST BLE Mesh app on Store**



- **BlueNRG-mesh community forum**
 - **<http://community.st.com/blemesh>**



STSW-BNRG-Mesh

20



The screenshot shows the STSW-BNRG-Mesh product page. At the top is the ST logo and a navigation bar. Below the navigation bar is a search bar. The main heading is 'STSW-BNRG-Mesh' with an 'ACTIVE' status. To the right of the heading are links for 'Save to MyST', 'Share', and 'Print'. Below the heading is the subheading 'Mesh over Bluetooth Low Energy'. There is a 'Download Databrief' link. Below this are three buttons: 'QUICK VIEW', 'RESOURCES', and 'GET SOFTWARE'. The page content describes the solution as a way to connect multiple BLE devices in Mesh networks for IoT solutions, highlighting its range-extending capabilities and secure communication features. It also mentions that the solution is compatible with the ST BlueNRG product family range.

Bluetooth SIG Certification

21

- **Mandatory Features**

- **FW library compliant** to the **SIG specs v1.0**
- Role: Node (Features: Proxy, Relay)
- Bearer: Advertising, GATT
- Provisioning: PB-GATT
- Provisioning Protocol: Provisioning Server
- Foundation Mesh Models: Configuration Server, Health Server




- **Optional Features**

- **Friend Node**
- **Low Power Node**

- **ST Additional Features**

- **Supports the Generic, Lighting, Sensor, Health, Vendor, Time & Scene Models**
- Support Light Intensity control via Generic-Level messages using PWM control
- **Provisioning information sharing** between mobile Phones/Tablets (Android and iOS) **via JSON file by eMail & Cloud Synchronization**

<https://launchstudio.bluetooth.com/ListingDetails/65504>



BlueNRG-Mesh in Numbers

22

ST BLE Mesh
Spec v1.0 SIG certified

Hop latency
30 ms

Provisioning procedure
10-15 seconds average

Compatible with both
BLE 4.X or 5.0

Memory footprint
32 KB Flash
10 KB RAM

Power consumption
7 mA average
(with no LPN/ Friendship)

Message Payload
8 bytes for unsegmented msg
64 bytes for segmented msg

Network size
Max 32767 nodes for a single network
Max network diameter of 126 hops





BlueNRG-Mesh Roadmap

23

STSW-BNRG-Mesh v1.05.000
X-CUBE-BLEMESH1 v1.0.0

- **Friendship & Low Power**
- **Health Model**
- **Lighting Model**
- Key-refresh
- IV Update procedure
- Database transfer (via Cloud)
- **BT Mesh v1.0 Profile Certification**
QDID 116029
- Base for
X-CUBE-BLEMESH1 v1.0.0



STSW-BNRG-Mesh v1.06.000
X-CUBE-BLEMESH1 v1.1.0

- **Performance Optimization**
- **Generic Model**
 - **Server: OnOff, Level**
 - **Client: OnOff, Level**
- **Lighting Model**
 - **Server: Lighting HSL**
- Android & iOS supporting HSL Model
- **CID & PID Configuration**
- **Static OOB Provisioning**

STSW-BNRG-Mesh v1.07.000
X-CUBE-BLEMESH1 v1.2.0
FP-SNS-BLEMESH1 v1.1.0

- **Sensors Model**
- **Time and Scene Model**
 - Empty wrappers
- **PB-ADV – Provisioning over advertising**

STSW-BNRG-Mesh v1.08.000
X-CUBE-BLEMESH1 v1.3.0
FP-SNS-BLEMESH1 v1.2.0

- Multiple Network Keys
- **Multiple App Keys**
- Neighbor table (indoor navig)
- **Output OOB, Input OOB, Public Key OOB Provisioning**
- **Vendor Model to appl layer**

STSW-BNRG-Mesh v1.09.000
X-CUBE-BLEMESH1 v1.4.0
FP-SNS-BLEMESH1 v1.3.0

- Direct Forwarding (*)
- Model IP Transport (*)
- Mesh Gateway example (*)

March 2019

June 2019

September 2019

November 2018

August 2018

<http://www.st.com/blemesh>

<http://community.st.com/blemesh>

<https://itunes.apple.com/us/app/bluenrg-mesh/id1348645067>

<https://play.google.com/store/apps/details?id=com.st.bluenrgmesh>



(*) Bluetooth SIG specs ongoing.
Certification dates may change


Available on SoC and network processor

BlueNRG-MESH SDK

for Embedded, Android and iOS


24

FW examples in source code for
ST BlueNRG-Mesh library

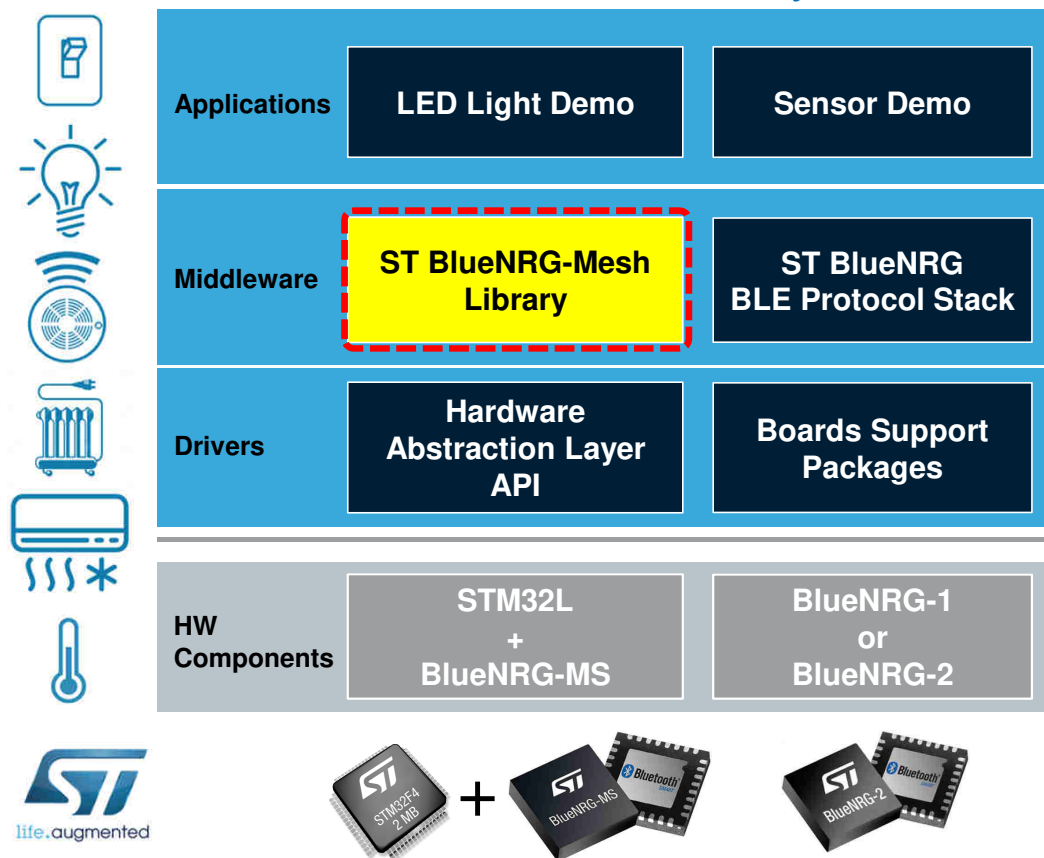

 **Android SDK**

 **iOS SDK**

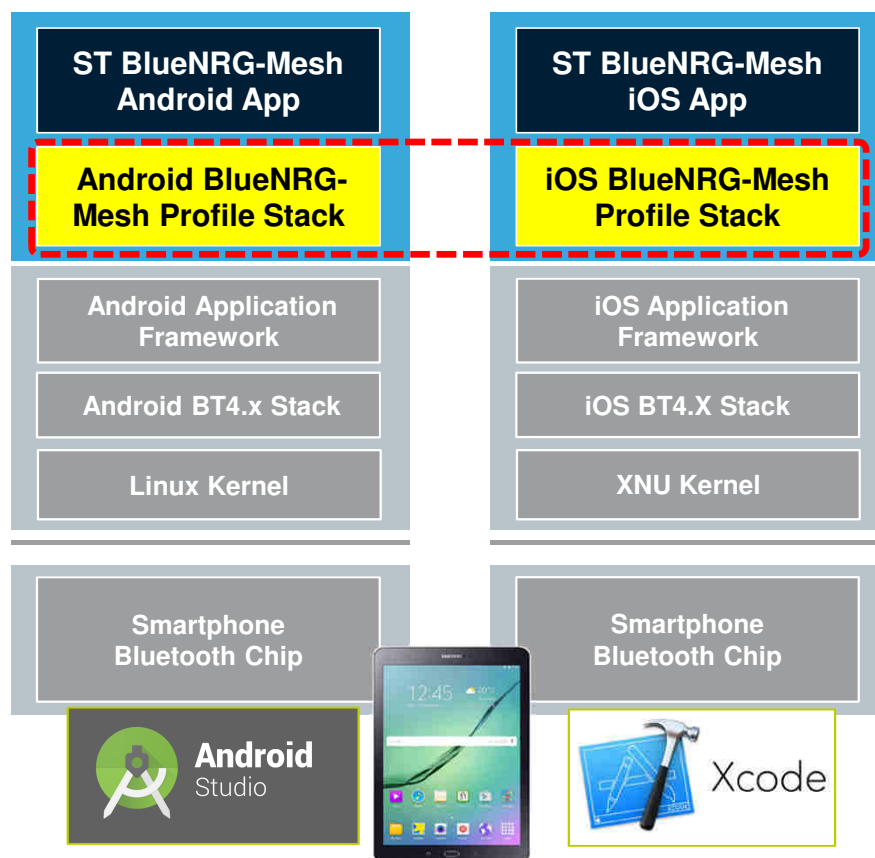

BlueNRG-Mesh



Bluetooth Mesh Basics

BlueNRG-Mesh SDK Solution



Getting started with BlueNRG-Mesh





BlueNRG-MESH SDK


Software Platform Support

26

BlueNRG-Mesh App



ST BLE Mesh app
for Android and iOS

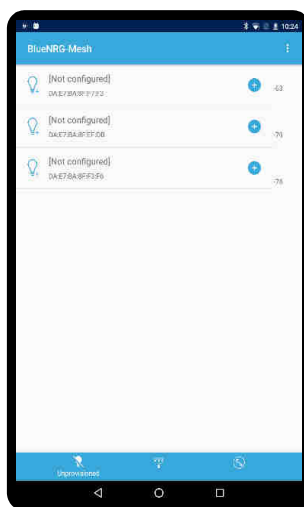

BlueNRG Platform SW

- **STSW-BNRG-Mesh**

- Mesh over Bluetooth Low Energy for **BlueNRG-1** and **BlueNRG-2**
- https://www.st.com/content/st_com/en/products/embedded-software/wireless-connectivity-software/stsw-bnrg-mesh.html

- **X-CUBE-BLEMESH1**

- Mesh over Bluetooth low energy software expansion for **STM32Cube**
- <https://www.st.com/en/embedded-software/x-cube-blemesh1.html>

- **Application Example: FP-SNS-BLEMESH1**

- **STM32Cube** function pack for IoT node with BLE Mesh connectivity and **Sensor** model examples
- <https://www.st.com/en/embedded-software/fp-sns-blemesh1.html>

BlueNRG-MESH SDK

Hardware Platform Support


27



STEVAL-IDB007V2
BlueNRG-1

STEVAL-IDB008V2
STEVAL-IDB009V1
BlueNRG-2


SW Package: STSW-BNRG-Mesh

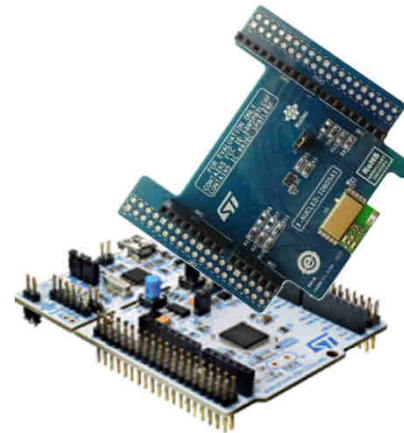

Nucleo-L1/L4/F3/F4 + X-Nucleo-IDB05A1 + X-NUCLEO-IKS01A2

BlueNRG-MS +
STM32L1 or STM32L4 or STM32F3 or
STM32F4

SW Packages: X-CUBE-BLEMESH1
and FP-SNS-BLEMESH1

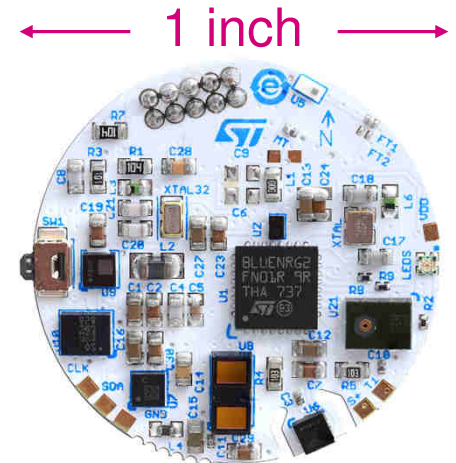


STEVAL-BCN002V1B
aka «BlueTile»
BlueNRG-2

BLE Mesh Coming soon*

Contents of STSW-BNRG-Mesh package

28

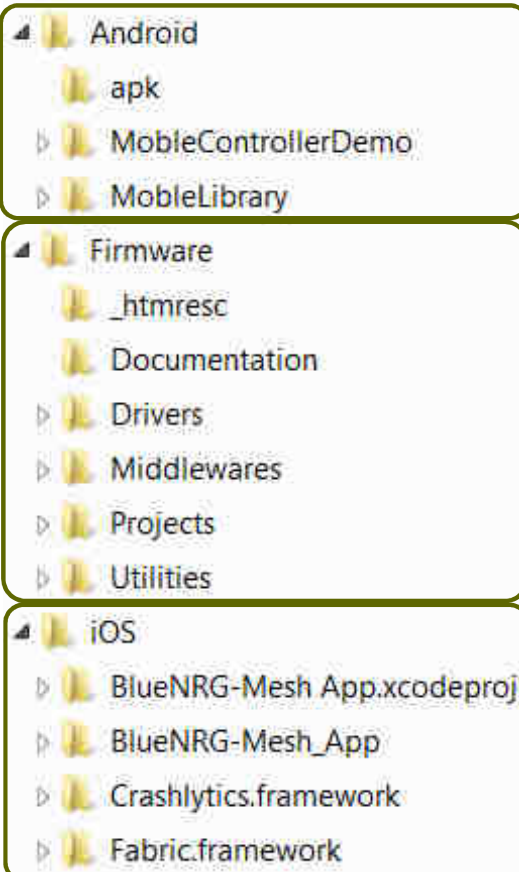

- Android SDK
 - **App Source Code for Android Studio**
 - Mesh Library
 - APK
- Firmware SDK
 - **Examples for BlueNRG-1, BlueNRG-2**
 - **Middleware folder with libraries for Mesh and BLE communication**
 - **Drivers** folder with HAL and specific drivers for **supported boards and components**
 - **Doxygen Documentation**
- iOS SDK
 - **App Source Code for Xcode**
 - Mesh Library in Object code




STSW-BNRGFLASHER for BlueNRG-1/2

Program in just a few seconds: Using Binaries

1 Click "Select Image file"

2 Browse the following path for the binary "BlueNRG2_Lighting_Demo.bin"

C:\Users%\userprofile%\ST\STSW-BNRG-Mesh 1.07.000\Firmware\Projects\BlueNRG-2\Applications\Lighting_Demo\Binary

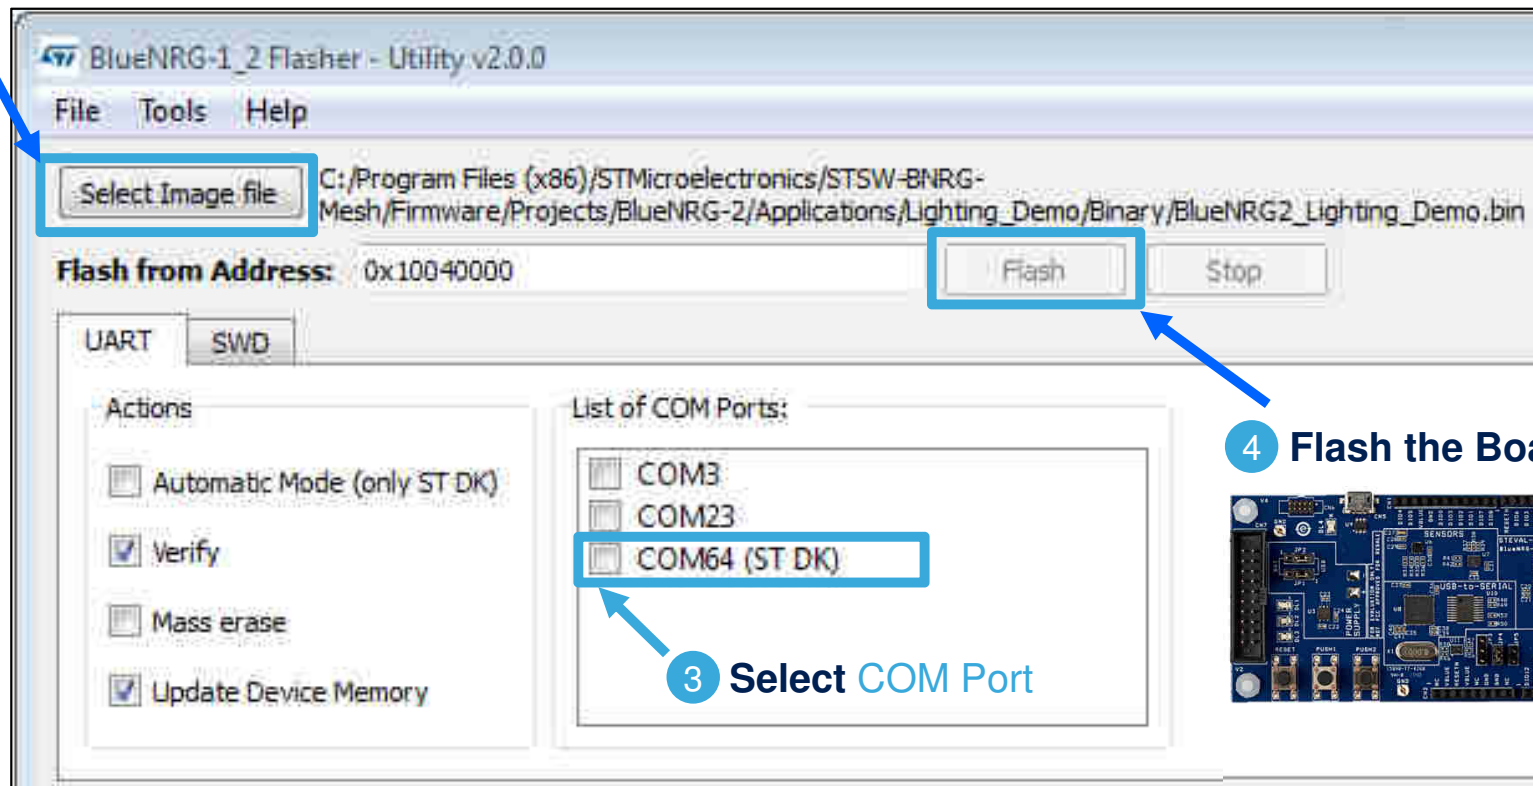


4 Flash the Board

3 Select COM Port



ST BLE Mesh: Provisioning of the Nodes

30

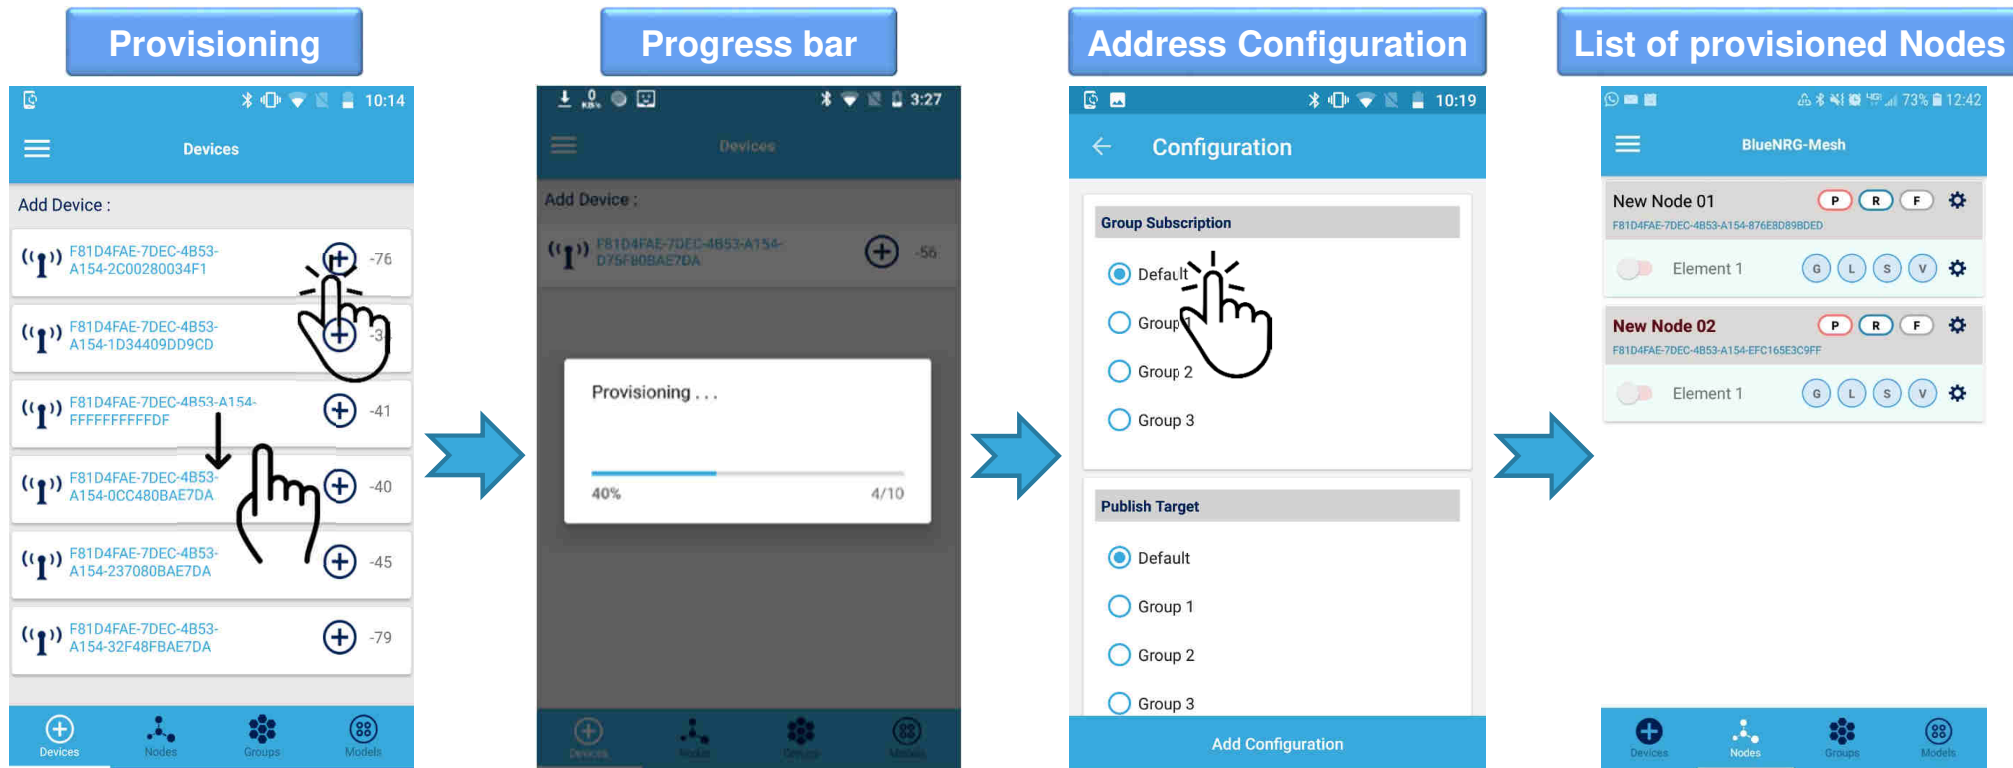

Before the provisioning the ones listed are called **"devices"**

The Node can be added to a specific group of elements



ST BLE Mesh: Nodes List tab screen

31

The screenshot displays the 'BlueNRG-Mesh' application interface. At the top, the status bar shows connectivity icons and a 73% battery level. The app title 'BlueNRG-Mesh' is centered. Below it, two nodes are listed: 'New Node 01' and 'New Node 02'. Each node entry includes a MAC address and a set of role buttons (P, R, F) and model buttons (G, L, S, V). Callouts provide the following information:


- Element inside the node:** Points to the 'Element 1' toggle switch under each node.
- Proxy, Relay and Friend roles are supported:** Points to the 'P', 'R', and 'F' role buttons.
- Models Supported: Generic, Lighting, Sensor, Vendor:** Points to the 'G', 'L', 'S', and 'V' model buttons.
- Proxy Node indicated with the name in bold:** Points to the bold text 'New Node 02'.

At the bottom, a navigation bar contains four icons: a plus sign for 'Devices', a network diagram for 'Nodes', a group of dots for 'Groups', and a gear for 'Models'. Callouts identify these as 'Provisioning View', 'Network View', 'Groups View', and 'Models View' respectively.





ST BLE Mesh: Models Selection

32

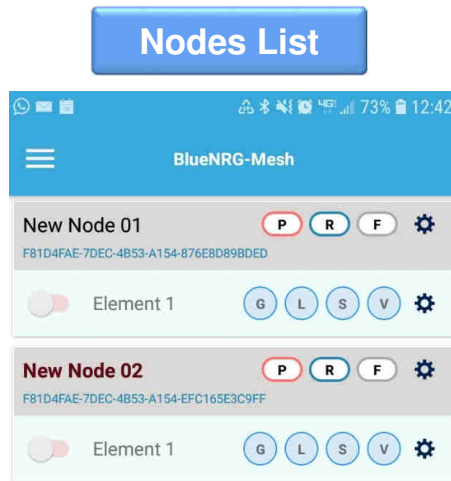

Models selection

- Different screen for each mesh model
- Send model specific commands
- Selected choice is saved

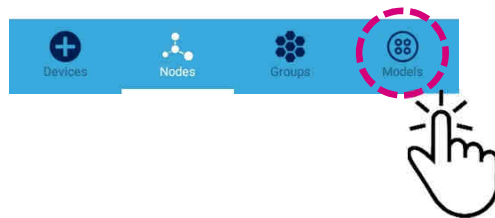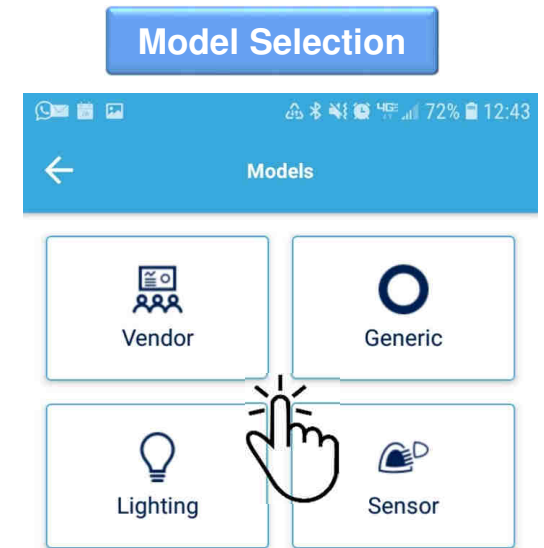




ST BLE Mesh: Models Selection

33



Vendor Model

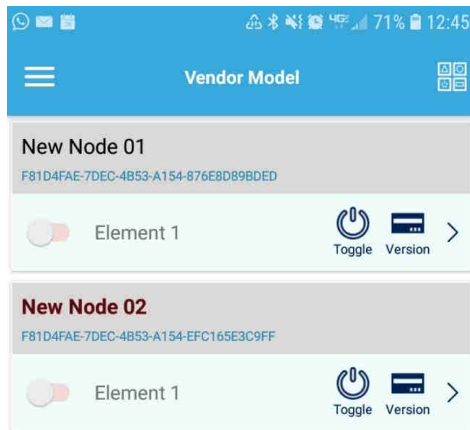


- Supported Commands

- **Vendor on/off**
- **Version query**

* Vendor model allows for transmitting **custom payload**.



Generic Model

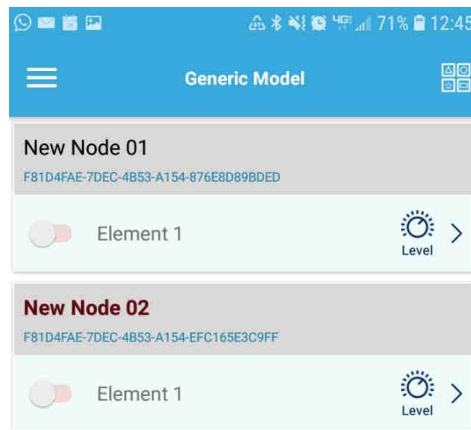


- Supported Commands

- **Generic on/off**: for device supporting On/Off feature
- **Generic level**: Manage state of an element in a **16-bit signed integer**



Lighting Model

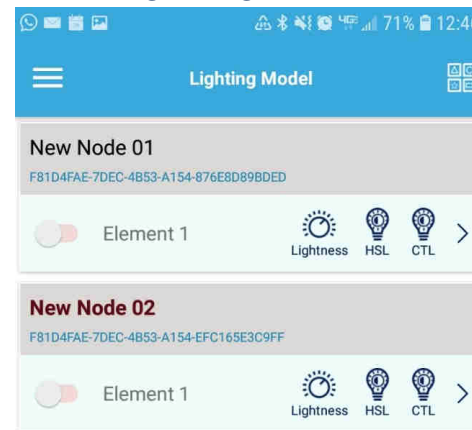


- Supported Commands

- **Light lightness**
- **Hue, Saturation, Lightness**
- **CTL (Color temperature), Lightness**



Sensor Model

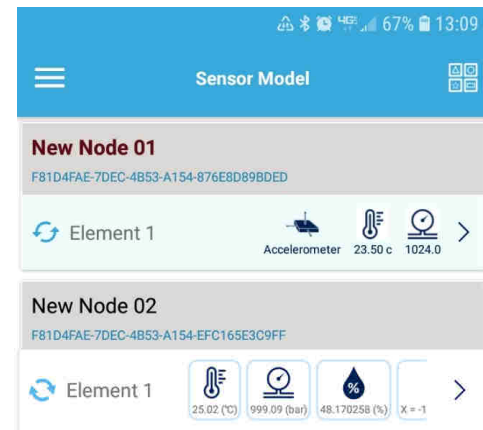

- Supported Commands

- **Sensor Get**: i.e. Acceleration, MAG & Gyro, Temperature, Humidity, Pressure
- **Sensor Cadence Set**




Network Configuration Database 34

- **Stores security info & parameters** to operate in a mesh network
- Shared in **JSON** format.
- Allows another smartphone to manage and control the mesh network.
- Two ways to share
 - **Via email** – Instantly share network with another smart phone
 - **Via Cloud** – Our mesh cloud web app allows sharing between multiple phones.
- **Interoperable** on both iOS and Android BlueNRG-Mesh Apps


Exchange Provisioning DB Configuration

35

Settings

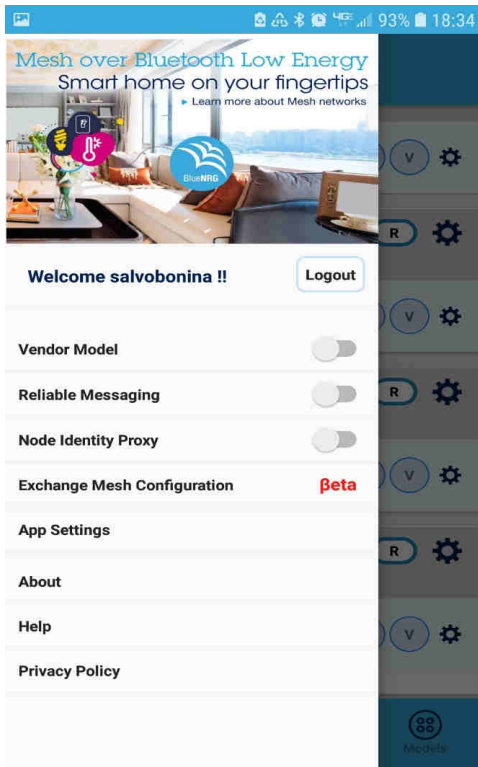

Import/Export Configuration

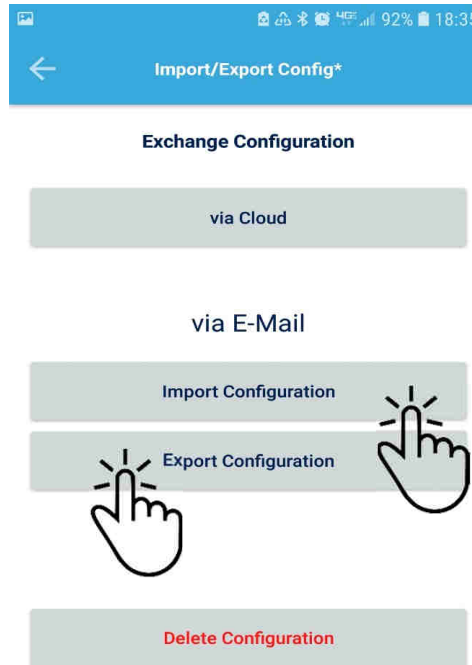


Next Panel

Import Configuration

**Export Configuration on one Smartphone.
Import Configuration on another Smartphone.**

To import on iPhone/iPad, save the email attachment with "Save to Files" → On My iPhone/iPad → "BlueNRG_Mesh"

Replace current configuration

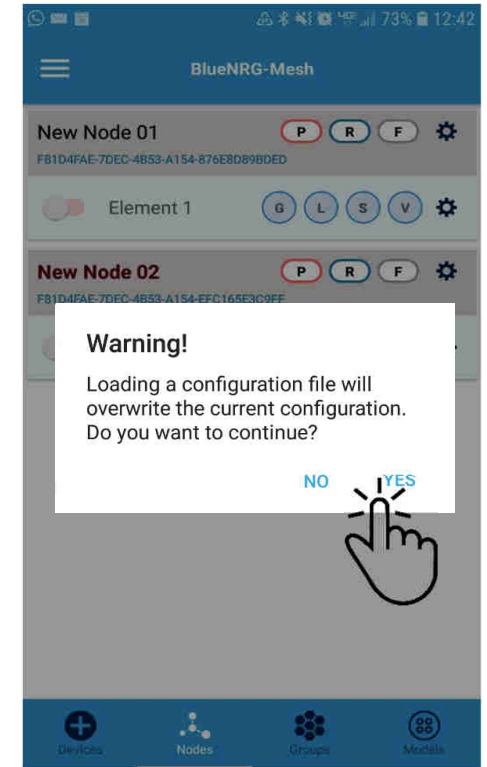





Cloud

Cloud Synchronization

36

Settings

via Cloud

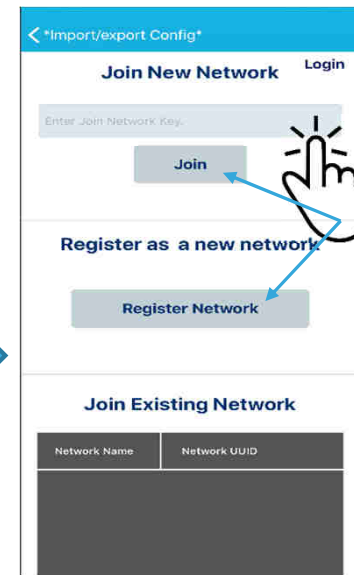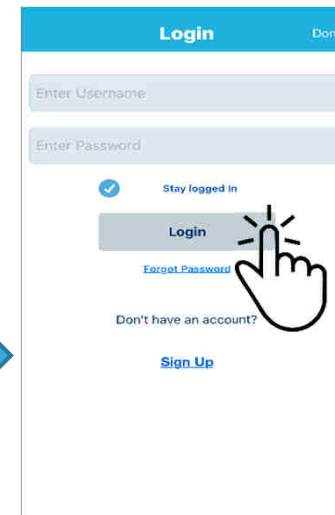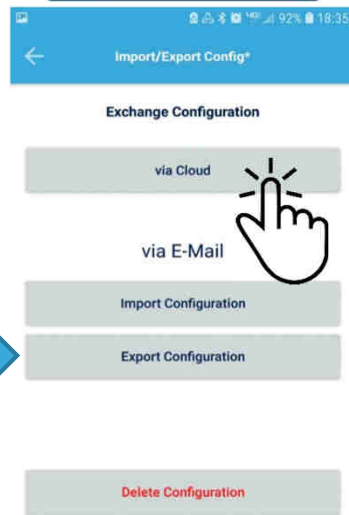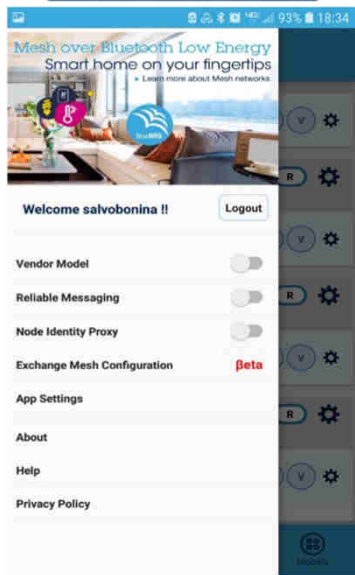

Sign-up

Login

Join or
Register a new
network

Cloud Network scenarios

- Register a New Network
- (Re) Join an Existing Network (pre-registered by you)
- Join a New Network (by invitation)

STSW-BNRRG-Mesh Documentation

37

AN5285 - STSW-BNRRG-Mesh Friend and Low Power features **(NEW!)**

- **How to enable low power operations, in agreement with Bluetooth Mesh Profile v1.0 and Friendship concept**

UM2290 - BlueNRG Mesh Android API guide for Mesh over Bluetooth low energy

UM2417 - BlueNRG Mesh iOS API guide for Mesh over Bluetooth low energy

- **Start developing Bluetooth Low Energy Mesh applications on Android devices**
 - Network creation
 - List un-provisioned nodes
- Provision a new node
- Send unicast/broadcast commands
- Save/Restore network configuration
- Register/Un-register callbacks



UM2180 - Getting started with the ST BlueNRG-Mesh Android application (*)

UM2361 - Getting started with the ST BlueNRG-Mesh iOS application (*)

- **Provision, un-provision, and control nodes in Bluetooth Low Energy Mesh network**

UM2295 - Getting started with the ST BlueNRG-Mesh embedded firmware

- **Start developing Bluetooth Low Energy Mesh applications on available platforms**
 - Core functionality for secure provisioning and communication
- Smart Light sample application



BlueNRG-Mesh additional resources

38



- Bluetooth Mesh deep dive from **Bluetooth SIG website**:
 - [Bluetooth Mesh specification](#)
 - [Bluetooth Mesh overview](#)
 - [Bluetooth Mesh FAQ](#)
- **BlueNRG-Mesh SDK** available (firmware, mobile app for Android, iOS):
 - www.st.com/blemesh
- **BlueNRG-mesh community forum**
 - <http://community.st.com/blemesh>
- **ST BLE Mesh Android application** available on **Google Play Store**:
 - <https://play.google.com/store/apps/details?id=com.st.bluenrgmesh&hl=en>
- **ST BLE Mesh iOS application** available on the **Apple iTunes App Store**:
 - <https://itunes.apple.com/us/app/bluenrg-mesh/id1348645067?mt=8>
- **Getting started with BlueNRG-Mesh** video on **YouTube**
 - <https://www.youtube.com/watch?v=MV5M5AHMuU0>

Conclusion: BlueNRG-Mesh

39

- **BlueNRG-2 has the highest radio efficiency in the market** ensuring ultra-fast wake-up capability combined with an ULL technology
- **BlueNRG-Mesh** is ready today, with customers in production
- **BlueNRG-Mesh** is **SIG certified**, and provides an **easy-to-use full ecosystem SDK** for FW and Mobile App (Android/iOS) development
- **Multiple evaluation platforms:** BlueNRG evalkit, Nucleo kit and BlueNRG-Tile





life.augmented

