



STM32L4 – Ultra-low-power LCD

Liquid Crystal Display (LCD) controller

Revision 2.0



Hello and welcome to this training module for the STM32L4 Liquid Crystal Display (LCD) controller. This controller can be used in a wide range of applications such as home appliances, medical, automotive, industrial... to display either images made up of a large number of pixels, a combination of alphanumeric symbols or various useful predefined symbols such as digits, bells, low-battery symbol, arrows, antenna, and progress bar.



- Provides interface with external monochrome passive LCD panels
 - Fully configurable
 - Able to drive up to 176 (44x4) or 320 (40x8) LCD segments.
 - Full support of low-power modes

Application benefits

- Built-in, low-cost solution
- No need for external analog components
- No extra consumption due to external driver
- Suited to drive high-load LCD displays

The LCD controller integrated inside STM32L4 products provides a control interface for driving external segmented LCD panels. This interface is fully configurable, allowing easy control of any existing monochrome passive LCD panel (up to 320 segments) available today on the market. The STM32L4 allows the LCD controller to operate in all low-power modes but it is off in Standby and Shutdown modes.

Applications benefit from a built-in low-cost solution not requiring any external controller nor external analog components. The step-up converter supplying the V_LCD voltage and resistive network dedicated to generate all intermediate voltages are both part of the controller. The advantages of an embedded controller are that it does not require extra power consumption from external controllers and that it fully supports the STM32L4's ultra-low-power modes for higher power

efficiency. Its flexible and high-level driving capability make it able to support a wide range of LCD displays, even those with a higher capacitive load.

LCD principle 3

- The LCD display is made up of several segments (pixels or complete symbols) which can be made visible or invisible.
- Each segment consists of liquid crystal molecules aligned between 2 electrodes (1 COM terminal and 1 SEG terminal). It is equivalent to a capacitor.
- When a voltage greater than a threshold voltage is applied across the liquid crystal, the segment becomes visible.
- The waveform across a segment must alternate to avoid a DC current, otherwise the LCD's lifetime may be shortened.



The LCD display is made up of several segments (pixels or complete symbols) which can be made visible or invisible.

Each segment consists of liquid crystal molecules aligned between 2 electrodes (1 COM terminal and 1 SEG terminal). It is equivalent to a capacitor.

When a voltage greater than a threshold voltage is applied across the liquid crystal, the segment becomes visible.

The waveform across a segment must alternate to avoid a DC current, otherwise the LCD's lifetime may be shortened.

- High flexibility frame rate control
- Programmable duty and bias
 - Duty: Static, 1/2, 1/3, 1/4, 1/8 [defined as $1/\langle \text{number of common terminals} \rangle$]
 - Bias: Static, 1/2, 1/3, 1/4 [defined as $1/\langle \text{number voltage levels used} - 1 \rangle$]
- Dual drive resistive network to generate intermediate voltage levels
- Integrated voltage output buffers



The LCD controller offers a fully programmable interface to control a wide range of LCD displays. The flexible frequency generator makes it easier to scale and fine tune the frame frequency. The LCD controller supports several duty ratios and bias levels to adapt to a wide range of LCD display characteristics. The structure of the resistive network is configurable by software to adapt the drive current to the LCD display used. The voltage output buffers can improve the driving capability for LCD displays with high capacitive load.

Key features 5


- Software selection between internal and external VLCD voltage sources
- Double buffering
 - LCD_RAM register can be updated at any time by the application without affecting the integrity of the data displayed
- Unused segments and commons pins can be used as general-purpose I/Os or for another alternate peripheral function
- Full support of low-power modes except for Standby and Shutdown modes



The LCD controller offers the option to use an internal or external V_LCD supply source to match any application constraints. With the double buffer memory, the LCD_RAM register, which contains pixel information, can be updated at any time by the application software without affecting the integrity of the data displayed. Unused segment and common pins can be used as general-purpose I/Os or for another peripheral. Last but not least, the LCD controller supports all STM32L4 low-power modes, except Standby and Shutdown modes, for optimized application power efficiency.

Block diagram

6

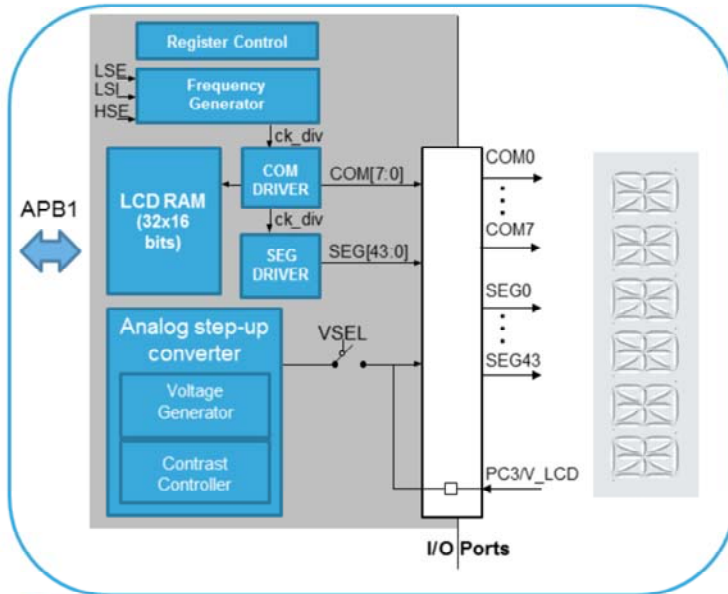


- Able to drive up to 176 (44x4) or 320 (40x8) LCD pixels
 - Up to 8 common terminals
 - Up to 44 segment terminals
- No external component needed

Here is the block diagram of the LCD controller, which also shows the interface with the LCD display. This controller is able to drive 176(44x4) or 320(40x8) LCD pixels. It is made up of the frequency generator used to deliver the correct clock frequency to drive the LCD display, the COM and SEG drivers, the LCD RAM which contains pixel information (active/inactive) and the analog step-up converter used to adjust the contrast. No external components are required to make the controller work except an external capacitor connected to V_LCD when the step-up converter is used (VSEL closed).

Frequency generator 7

• Highly flexible frame rate control

- Same clock as RTCCLK
 - LSE, LSI or HSE divided by 1, 2, 4 or 8.
- The LCDCLK input clock must be in the range of 32 kHz to 1 MHz
- LCDCLK can be divided by any value from 16 to 215x31
 - LCDCLK is divided by 2^{PS}[3:0]
 - The ck_ps is also divided by 16 to 31 to adjust the resolution rate.

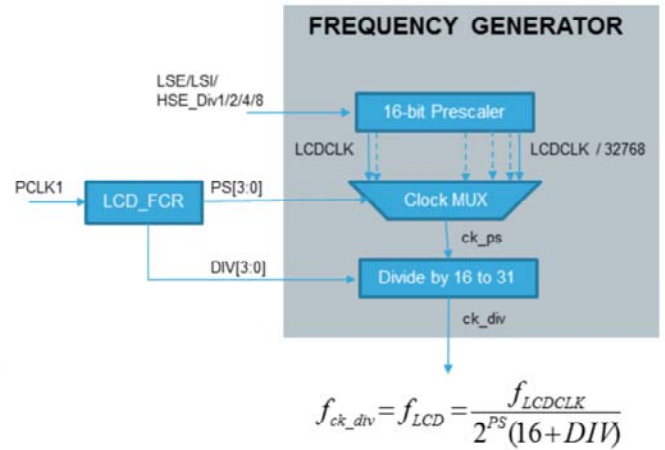


The LCD controller features a highly flexible frequency generator. The LCD clock source is the same as the RTC clock, which is either a low-speed external 32.768 kHz oscillator (LSE), a low-speed internal 32 kHz RC oscillator (LSI), or a high-speed external 4 to 48 MHz oscillator (HSE) divided by 1, 2, 4 or 8. The frequency generator allows you to achieve various LCD frame rates starting from an LCD clock source which can vary from 32 kHz to 1 MHz. The clock source must be stable in order to obtain accurate LCD timing and hence minimize DC voltage offset across LCD segments. The input clock LCDCLK can be divided by any value from 16 to 2¹⁵ x 31. This frequency generator consists of a prescaler (16-bit ripple counter) and a 16 to 31 clock divider. LCDCLK is first divided by 2^{PS}[3:0]. If a finer resolution rate is required, the DIV[3:0] bits can be used to divide the clock further by 16 to 31. In this way, you can roughly scale the

frequency, and then fine tune it by linearly scaling the clock with the counter. The output of the frequency generator ($f_{\text{ck_div}}$) constitutes the time base for the entire LCD controller. It is equivalent to the LCD phase frequency.

Frequency generator 8

• Highly flexible frame rate control

- fFrame is obtained from fLCD
- The typical frame frequency range must be within ~30 Hz to ~100 Hz
 - If a lower frequency is used, the LCD flickers
 - If a higher frequency is used, the power consumption increases
- Example of frame rate calculation

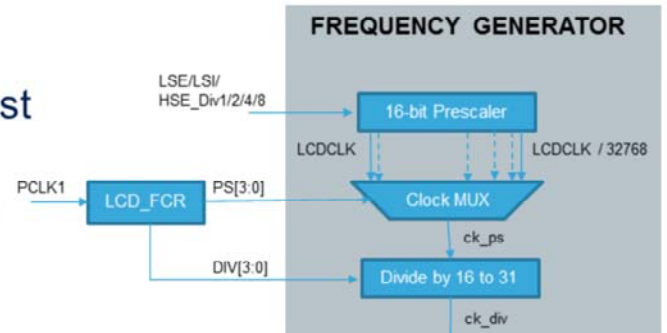

$$f_{ck_div} = f_{LCD} = \frac{f_{LCDCLK}}{2^{PS}(16 + DIV)}$$

$$f_{Frame} = f_{LCD} * duty$$


LCDCLK	PS[3:0]	DIV[3:0]	Ratio	Duty	f _{Frame}
32.768 kHz	3	1	136	1/8	30.12 Hz
32.768 kHz	4	6	352	1/3	31.03 Hz
32.768 kHz	2	4	80	1/4	102.4 Hz
1.00 MHz	6	3	1216	1/8	102.80 Hz



The frame frequency (f_{Frame}) is determined by dividing f_{ck_div} (f_{LCD}) by the number of active common terminals (or multiplying it by the duty rate). The typical frame frequency must be selected to be within a range of around 30 to 100 Hz. The selected frequency must be a compromise between an acceptable refresh rate that avoids flickering and the power consumption which increases with the frequency. The following table shows examples of frame rate calculations by specifying PS[3:0] and DIV[3:0] values for different LCDCLK frequencies.

Frame format 9


- Type-B waveforms are made up of ODD frames followed by EVEN ones
- Every COM signal has identical waveforms but different phases in order to reduce EMI
- COM[X] has its maximum amplitude (VLCD or VSS) only in phase X of a frame cycle.
 - COM[X] = VLCD in phase X of the Odd frame
 - COM[X] = VSS in phase X of the Even frame

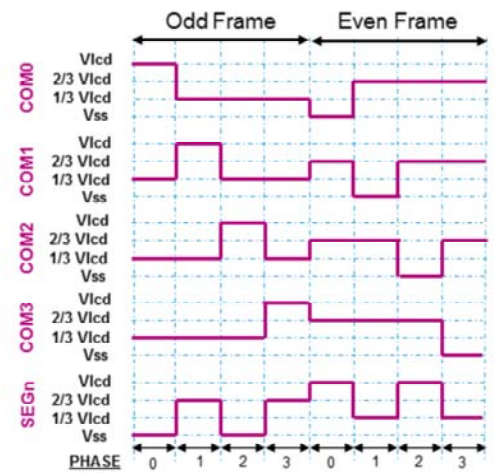

The LCD controller generates a Type-B frame format which maintains 0V DC over the two odd and even frames. All COM signals have identical waveforms, but a different phase in order to reduce electromagnetic interference. COM[X] has its maximum amplitude only during phase X of a frame; that is to say, V_{LCD} during odd frames and V_{SS} during even frames.

Frame format 10

- During the other phases, the signal amplitude is:
 - 1/4 VLCD or 3/4 VLCD in case of 1/4 bias
 - 1/3 VLCD or 2/3 VLCD in case of 1/3 bias
 - 1/2 VLCD in case of 1/2 bias
- The segment terminals are multiplexed and each of them control up to 8 picture elements
- To activate pixel[n] connected to COM2, SEGn must be:
 - Inactive (VSS) during phase 2 of an odd frame
 - Active (VLCD) during phase 2 of an even frame

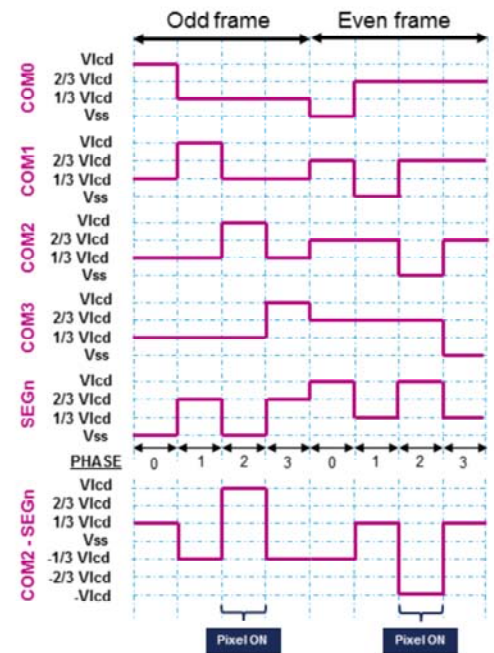

During the other phases, the signal amplitude is 1/4 V_{LCD} or 3/4 V_{LCD} if a 1/4 bias is selected, 1/3 V_{LCD} or 2/3 V_{LCD} if a 1/3 bias is selected and 1/2 if a 1/2 bias is selected. Each segment terminal is multiplexed; meaning that each one may control up to 8 picture elements depending on the chosen duty rate. For a duty rate of 1/4 as shown in this example, a single segment terminal is associated with 4 common terminals, thus allowing the control of 4 picture elements. The greater the multiplexed rate, the more segment or picture elements you can drive with a given number of segment terminals.

For example, to activate a pixel [n] connected to COM2, SEGn must be inactive (V_{SS}) during phase 2 of the odd frame and active (V_{LCD}) during phase 2 of the even frame. Actually, a pixel is active if the corresponding SEGn line has a voltage opposite that of the COM line

(here COM2) and inactive when the voltages are equal. As a result the voltage applied between COM2 and SEGn which can be observed on the COM2 – SEGn waveform, is +V_LCD during phase 2 of the odd frame and -V_LCD during phase 2 of the even frame.

LCD contrast compensation

11


The contrast can be adjusted using two different methods

- Method 1

- Using the internal voltage: the firmware can adjust VLCD between 2.6 and 3.6 V in 8 steps

- Method 2


- Using an external voltage supply: by programming a dead time (up to 8 phase periods) between each frame couple where the COM and SEG value is tied to VSS at the same time

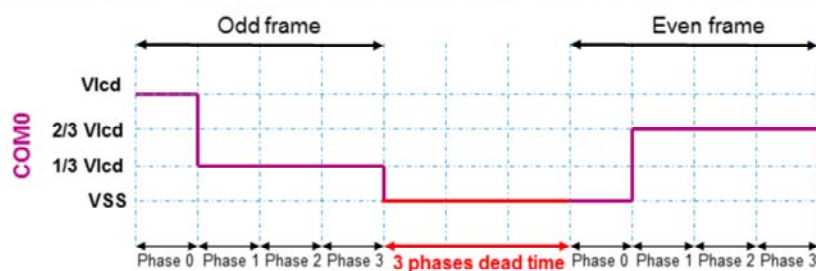

The LCD controller offers high contrast control flexibility. The method used to adjust the contrast depends on the LCD supply source. When the step-up converter is selected as V_LCD source, the V_LCD value can be chosen among a wide set of values from 2.6 to 3.6 volts which are selectable via the Contrast Control bits in the LCD_FCR register. However, when using an external LCD supply source, the contrast level is adjusted using a programmable dead time where both active COM and SEG terminals are all tied to V_SS at the same time between each odd frame and each even frame. As a result, the LCD RMS voltage of the entire frame (odd + even) is reduced, thus decreasing the contrast. Of course, the longer the dead time periods, the lower the contrast.

Contrast level is dependent of the selected duty ratio

- To turn an LCD segment ON
 - $V_{ON(RMS)}$ must be greater than V_{TH} (LCD threshold voltage)
- Contrast level depends on
 - The difference between $V_{ON(RMS)}$ and $V_{OFF(RMS)}$
 - The level of $V_{ON(RMS)}$ versus V_{TH}
- $V_{ON(RMS)}$ and $V_{OFF(RMS)}$ are duty ratio dependent
 - The lower the duty ratio, the better the optical contrast

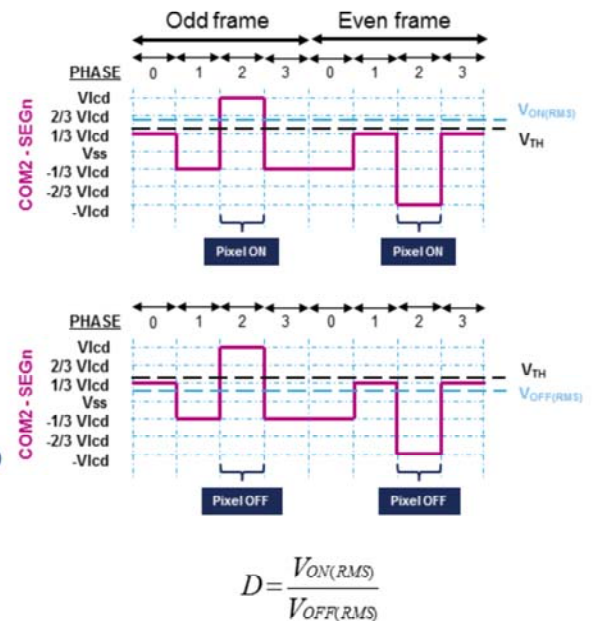

LCD displays are sensitive to root mean square (RMS) voltage levels. To turn a segment ON, the RMS voltage applied to this segment (here in the example, the potential difference between the COM2 and SEGn) must be greater than the LCD display threshold voltage (V_{TH}). The LCD threshold voltage depends on the quality of the liquid used in the LCD panel and the temperature. As a reminder, the optical contrast is defined by the difference in transparency of an LCD segment that is ON (dark) and an LCD segment that is OFF (transparent). In other words, by the difference between the RMS voltage of an LCD segment ON ($V_{ON(RMS)}$) and the RMS voltage of an LCD segment OFF ($V_{OFF(RMS)}$). Then, the greater the difference between $V_{ON(RMS)}$ and $V_{OFF(RMS)}$, the higher the optical contrast. In the same way, the contrast also depends on the level of $V_{ON(RMS)}$ versus the LCD threshold voltage. The greater the difference between

$V_{ON(RMS)}$ and V_{TH} , the higher the optical contrast.


However, $V_{ON(RMS)}$ and $V_{OFF(RMS)}$ are directly linked to the multiplex rate (or duty ratio) used to drive the LCD display. When the number of COM terminals required to drive the LCD display increases, the discrimination ratio (D) (contrast level that the LCD display can achieve) decreases since the separation between $V_{ON(RMS)}$ and $V_{OFF(RMS)}$ decreases, and the contrast decreases. As a consequence, to provide a better contrast and a greater separation between $V_{ON(RMS)}$ and $V_{OFF(RMS)}$, when the multiplexed rate increases, the LCD voltage must be increased. Make sure the LCD controller configuration matches the LCD display needs in terms of segment and common terminals; otherwise, this could result in a lower contrast.

LCD dual drive capability

13

Trade-off between drive level and power consumption optimization

- The LCD voltage is generated either
 - Internally using the step-up converter
 - Externally by connecting the power source to the VLCD pin
- A resistor network is used to generate intermediate voltage levels
 - RLN to increase current during transition
 - RHN to reduce power consumption in static state

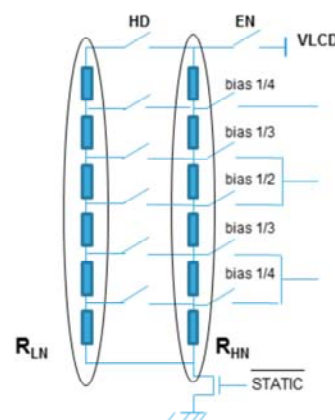

In the LCD controller, the power supply source may come from either the internal step-up converter or from an external voltage source applied on the V_LCD pin. When the step-up converter is selected as V_LCD source, the V_LCD values can be chosen independently of the VDD value via the Contrast Control bits in the LCD_FCR register. If an external source selected, the internal boost circuit (step-up converter) is automatically disabled to reduce power consumption. In both cases, the intermediate voltage levels required for the common and segment waveforms are generated thanks to resistor networks. One with low-value resistors (R_{LN}) for high-drive capability and the other with high-value resistors (R_{HN}) for low-drive capability which are used respectively to increase current during transitions and to reduce power consumption in static state. The R_{LN} divider is enabled when the high-drive resistor bridge is

closed. The high-drive resistor bridge can be switched on permanently when HD bit is set or for only for a short period of time thanks to the Pulse On Duration (PON) feature.


The PON bits configure the time during which $R_{_LN}$ is enabled through the HD switch each time the level of common and segment lines change.

LCD low power output buffers

14

Suited for high capacitive loads

- Able to drive high-load LCD panels
 - Prevent the LCD capacitive load from unacceptably loading the resistor bridge
 - Signal shape and VRMS are improved without need of high-drive resistor bridge
- Low power consumption buffers
- Independent of the VLCD supply source

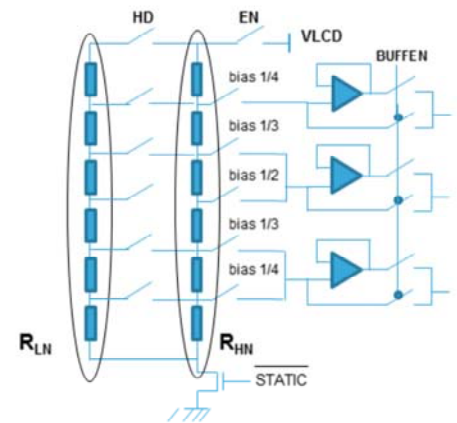

This flexible LCD drive capability is completed by low power voltage output buffers in order to reinforce again the ability of the LCD controller to drive very high capacitive loads. These buffers prevent the LCD capacitive load from unacceptably loading the resistor bridge by increasing the charging and discharging of output capacitors (pixels) during each transition. In this way, the voltage nodes are very stable (no voltage drop) thus improving drastically the signal shapes and the RMS voltage values.

These buffers are power consumption optimized. Their consumption is negligible during static phases whereas they are very reactive to provide necessary current required by the LCD load during transitions. To further reduce power consumption, when buffers are enabled, intermediate voltages are generated by R_{HN} . R_{LN} is automatically disabled regardless of the HD bit or PON


bits configuration. Output buffers can be used regardless of the selected LCD supply source (internal or external).

LCD RAM arrangement 15

From alphanumeric characters to LCD_RAM registers

- The LCD data register (LCD_RAM[15:0]) contains pixel information (active/inactive)
- Each matrix element is one bit of LCD_RAM[15:0]
- To enable a pixel defined by COM[x] and SEG[y]
 - M[x][y] must be set to '1'
- To disable a pixel defined by COM[x] and SEG[y]
 - M[x][y] must be set to '0'
- The LCD_RAM register can be updated at any time

16-segment digit



M[i,j]	COM0	COM1	COM2	COM3
SEG0	X	F	E	D
SEG1	I	J	K	N
SEG2	A	B	C	DP
SEG3	H	G	L	M
0x	4	D	7	0



LCD RAM 16 x 32 bits

SEG	63	43	39	35	32	31	27	23	19	15	11	7	3	2	1	0	COM
COM0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0
COM1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1
COM2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1
COM3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
COM4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
COM5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
COM6	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
COM7	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

LCD_DISPLAY

RAM refresh

LCD_RAM

Double Buffer Memory: LCD_RAM is always accessible



The LCD pixels are individually controlled by setting or clearing the corresponding bits of the LCD data register. The STM32L4 which can control LCD displays with up to 8 common terminals and up to 44 segment terminals to drive 176 (44x4) or 320 (40x8) LCD pixels uses LCD_RAM data registers made up of 16 x 32 bits (two 32-bit words per COM). To make LCD software efficient and to optimize LCD alphanumeric coding, we use a matrix. Each matrix element corresponds to 1 bit of the LCD_RAM[15:0] register. For example, to enable pixel 'A' connected to SEG2 and COM0, M[2,0] must be set to '1'. As a result, bit 2 of COM0 in the LCD_RAM register is set to '1'. Thanks to the double buffer memory feature, the LCD_RAM register can be updated at any time by the

application without affecting the integrity of the data displayed and without having to use interrupts to control display modifications. The application software can access the first buffer level (LCD_RAM). Once its content is modified, it requests the updated information to be moved into the second buffer level (LCD_DISPLAY). This operation is done synchronously with the beginning of the next frame.

Interrupt event	Description
Start of Frame	Set each time a new frame is starting.
Update Display Done	Set once the new LCD_RAM data is moved into the second buffer level for display update. This operation is done synchronously with the beginning of next frame.

If the device is in Stop mode (PCLK is not provided), the Update Display Done interrupt event will never occur.

Two interrupt events are available with the LCD controller. They both share the same interrupt vector. A Start of Frame interrupt is set each time a new frame starts to help synchronize software events. The Update Display Done interrupt is set once the new LCD_RAM data is moved into the second buffer level (LCD_DISPLAY) to update the display. This operation is performed synchronously at the beginning of the next frame.

Low-power modes 17

Mode	Description
Run	Active.
Sleep	Active. Peripheral interrupts cause the device to exit Sleep mode.
Low-power run	Active.
Low-power sleep	Active. Peripheral interrupts cause the device to exit Low-power sleep mode.
Stop 0/Stop 1	Frozen. Peripheral registers content is kept.
Stop 2	Frozen. Peripheral registers content is kept.
Standby	Powered-down. The peripheral must be reinitialized after exiting Standby mode.
Shutdown	Powered-down. The peripheral must be reinitialized after exiting Standby mode.



The LCD controller supports all STM32L4 low power modes making it very efficient in terms of power consumption. In Standby and Shutdown modes, the controller is off.

- Refer to these training modules related to this peripheral:
 - Reset and clock controller (RCC) for more information about the LCD controller's clock sources
 - Interrupts for more information about the mapping of the LCD controller's interrupts
 - General-purpose I/Os (GPIO) for more information about the LCD controller's segment and common lines as well as the VLCD pin
 - Power controller (PWR) for a description of the LCD controller's low-power modes



Refer to the training modules for these peripherals linked to the LCD interface:

Reset and clock controller (RCC) for more information about the LCD controller's clock sources.

Interrupts for more information about the mapping of the LCD controller's interrupts.

General-purpose I/Os (GPIO) for more information about the LCD controller's segment and common lines as well as the VLCD pin.

Power controller (PWR) for a description of the LCD controller's low-power modes.