




Wireless Charging in Consumer Applications

Paolo Battezzato
Applications Engineering Manager

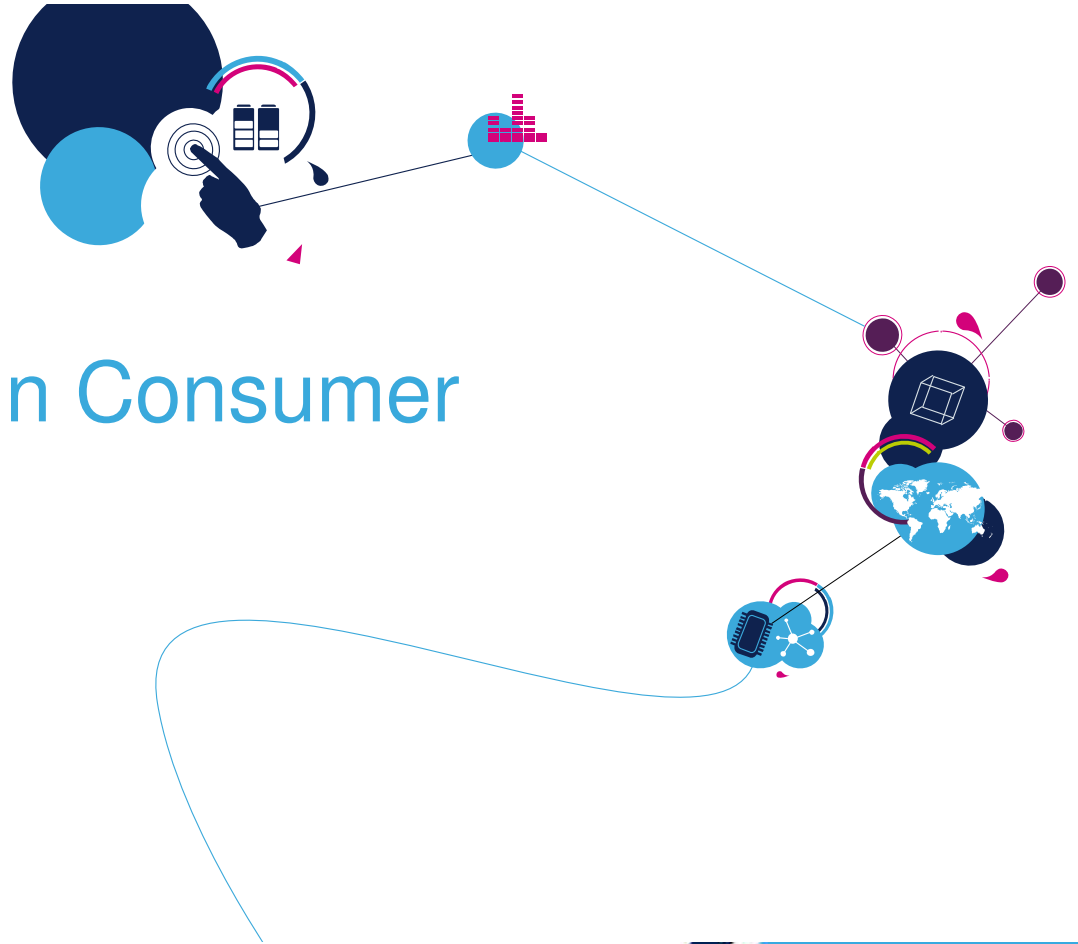

Technology Tour 2019

Toronto, Canada | May 29



Agenda

2


- Wireless power-transfer principles
- Main existing standards and key differences
- Introduction to Magnetic Induction power transfer
- ST solutions for Wireless Power - Transmitters
- ST solutions for Wireless Power – Receivers
- Upcoming solutions preview

Wireless Power at a Glance

3

Similar technology Different Implementation

Magnetic induction




Advantages
simple, efficient, safe, power scalable, mature

Key technology challenges
shield, coil alignment, good coupling

Disadvantages
limited x/y/z space, difficult for multiple device operation simultaneously

Inductive Power Transfer
Depends on close proximity and significant portion of the primary coil B fields intersecting the secondary coil

Magnetic resonance



Advantages
spatial freedom, multiple devices support, larger charging area

Key technology challenges
power scalable, environment safety, TX and RX design

Disadvantages
increased EMI, efficiency

Resonant Power Transfer
Depends only on secondary coils intersecting a reasonable amount of primary coil flux lines



is a member of Qi and AirFuel (former A4WP + PMA)

Different Standards

*Qi – by Wireless Power Consortium

* PMA – by Power Matter Alliance

A4WP – by Alliance for Wireless Power

Note: A4WP and PMA merged in June 2015



- Baseline Power Profile: 5W (rel 1.2.3)
- Extended Power Profile: 15W (rel 1.2.3)
- Medium Power Working Group up to 200W
- kitchen appliances Working Group up 2.4kW
- Resonant (Under Definition)




- PRU Category 1-7. PTU Class 1-6
- P_{RX} Out Max from 3.5W to 50W (Cat. 1 TBD)
- P_{TX} Input Max from 2W to 70W

Magnetic Induction Power Transfer

WPC Qi/AirFuel Inductive (Was PMA)

4

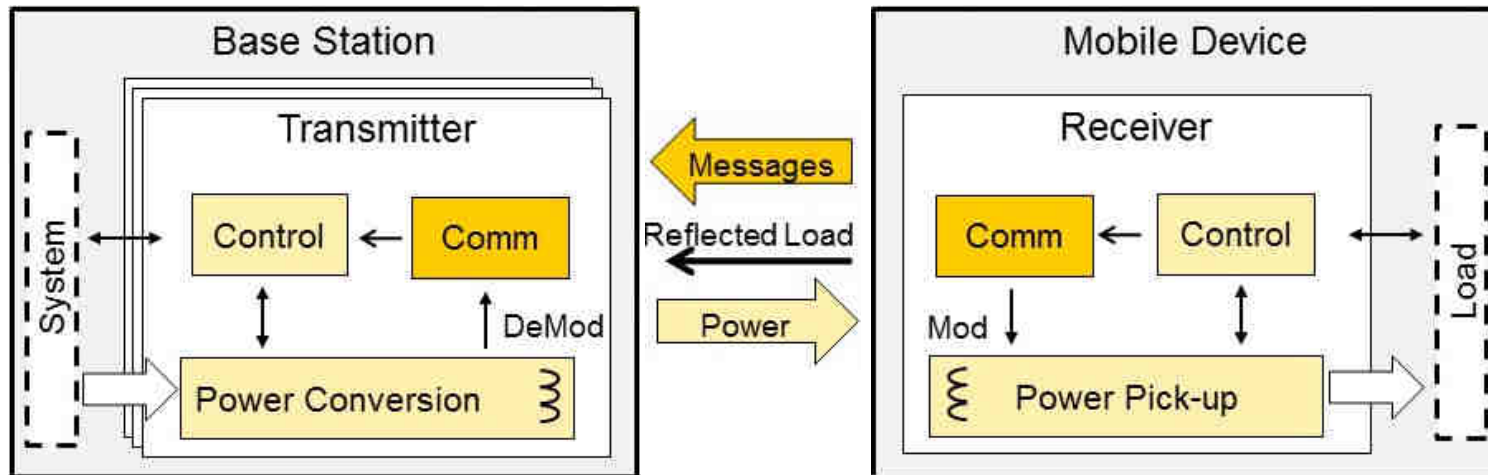


- Operating Frequency is 110-205kHz
- One Base Station typically powers one Mobile Device
- In-band digital link is used for identification of compatible devices and control of power levels (operates through the same coils used for power transfer)

Magnetic Resonance Power Transfer

AirFuel Resonant

5

- Operating Frequency is 6.78MHz
- Multiple PRUs can be powered from a single PTU
- A Bluetooth Low Energy (BLE) link is used for identification of compatible devices and control of power levels

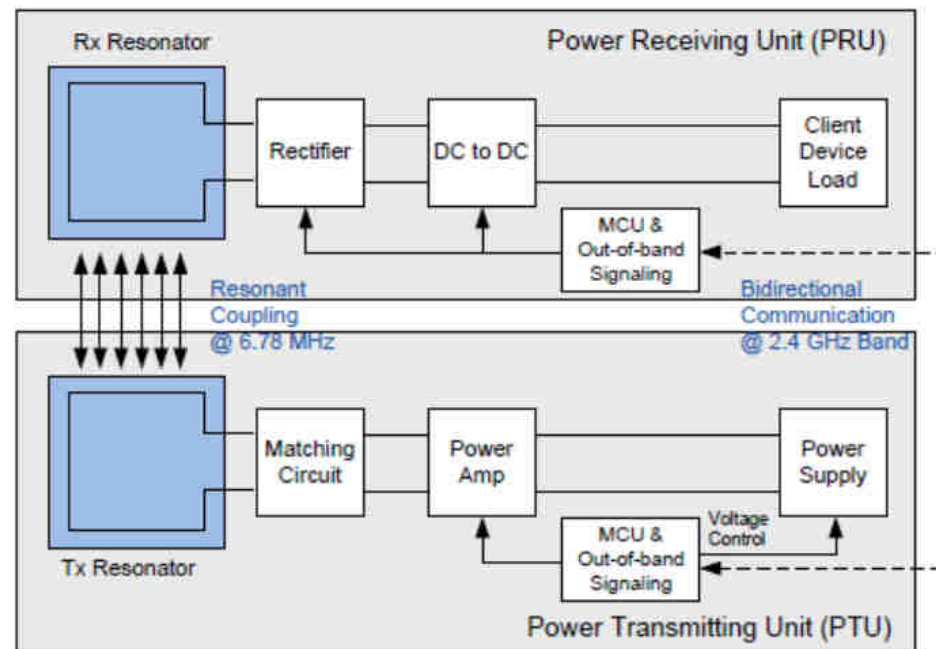




Introduction to WPC Qi Battery Charging

(Magnetic Induction)

Power Transfer Principles

7


- Tightly coupled wireless charging technology uses magnetic induction to transfer power from a transmitter (TX) to a receiver (RX)
- The magnetic field is generated by a **coil on the TX side**. The field is captured by a **coil on the RX side**. The field works through air, no magnetic circuit links the coils
- The received electrical signal is **rectified, filtered, and regulated** before supplying the load

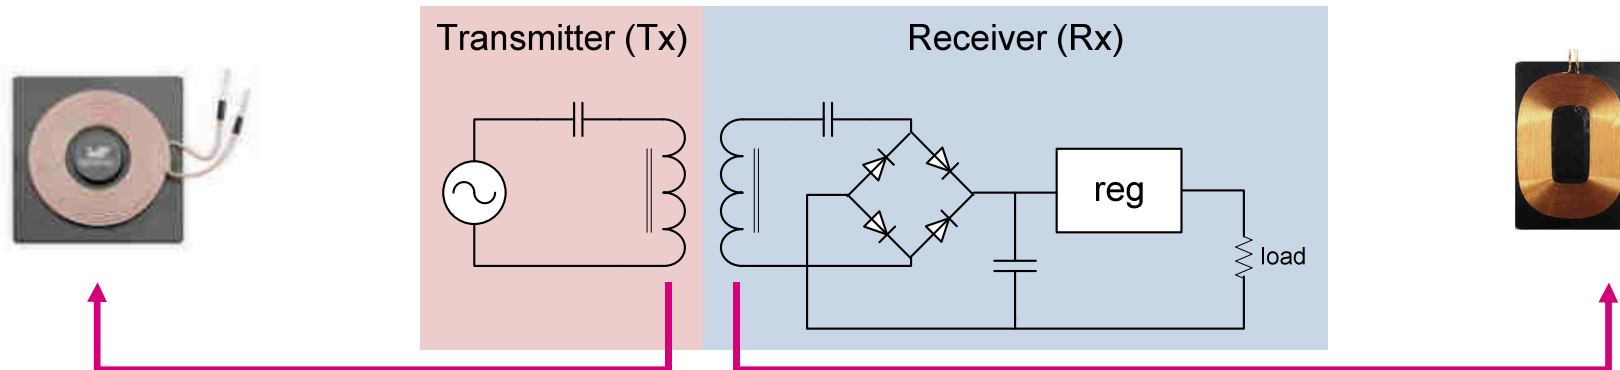


Magnetic Field Control by Adjusting Power

8

- To control the field, various solutions can be used (and combined):
 - Use the LC tank properties, changing the oscillator **frequency**.
 - Change the oscillator **duty cycle** (using a square wave oscillator)
 - Change the oscillator **voltage**.
 - Apply **phase** shift to a full bridge oscillator.

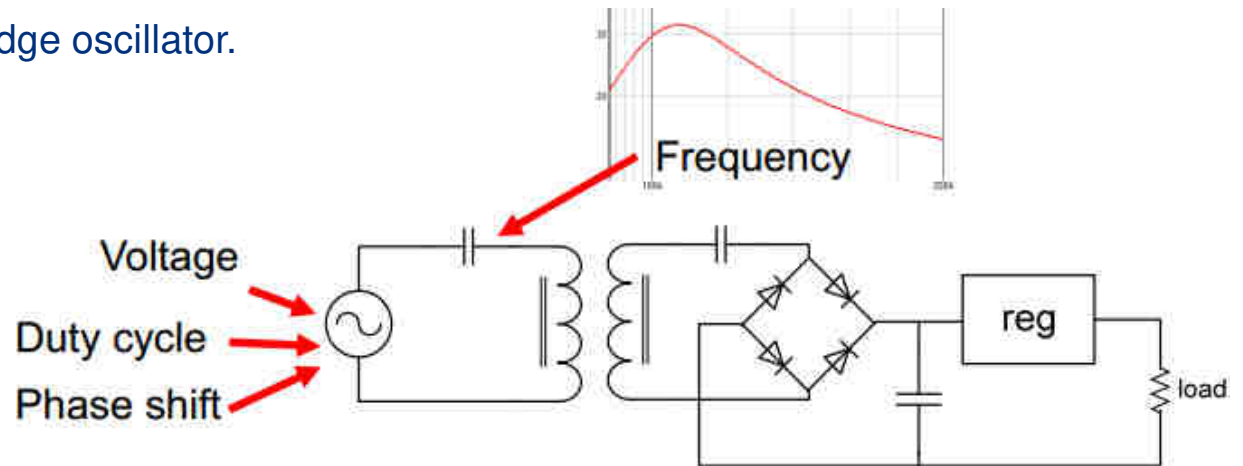



- Because there are too many variables (RX/TX coupling, RX & TX coils, load, ...), the TX cannot set the regulation point by itself. The RX will have to pass data to the TX about the regulation set point.
- This communication channel can also be used for auxiliary purposes and extended to bi-directional communication
- Qi 1.2.3 (latest public release) defines two communications methods:
 - **Unidirectional:** RX to TX only, ASK, for BPP (Baseline Power Profile). **Same as in Qi 1.1**
 - **Bidirectional:** RX to TX, ASK and TX to RX, FSK, for EPP (Extended Power Profile). **Did not exist in Qi 1.1**

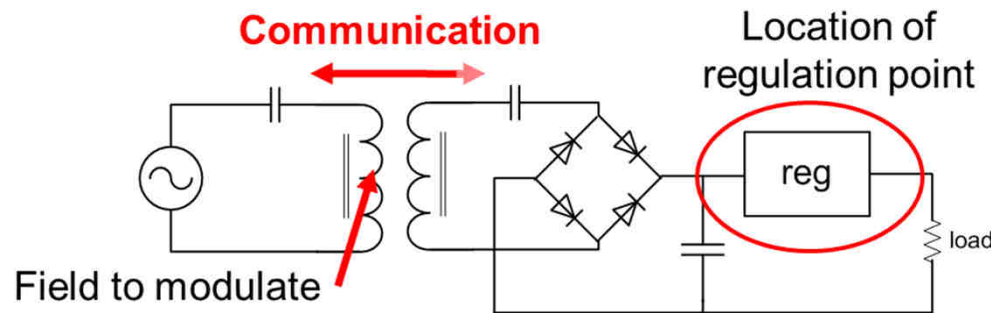

RX Presence Detection and FOD

10

- Receiver Presence Detection
 - The transmitter generates a magnetic field at regular intervals and check if a load is present and consumes power.
- FOD (Foreign Object Detection)
 - Qi 1.2.3 defines two methods. Qi 1.1 only had one, Power Balance:
 - **Power Balance:** If the TX transmits more power than what the RX reports (including losses), a foreign object is present
 - **Q-factor:** Compares Q measured on TX side with reference value stored in RX NVM

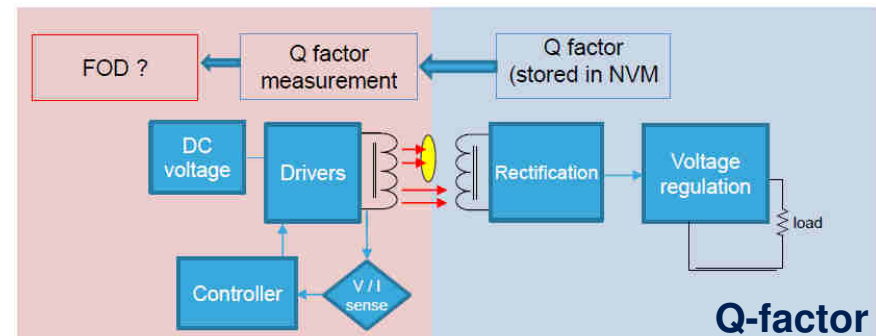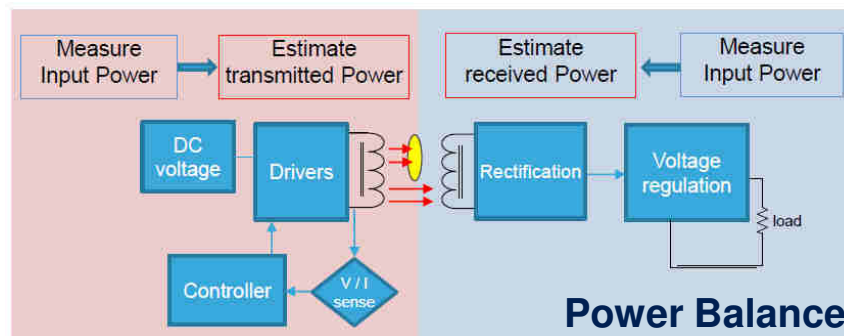


Qi Power-Transmitter Design Overview

11


Design	Description	Family	Voltage	Control
A1	Single Primary Coil with magnet alignment	#1	19 V	Frequency & Duty cycle
A2	Single movable Primary Coil	#1	12 V	Voltage
A3	Single movable Primary Coil	#2	12 V	Voltage & Frequency
A4	Two oblong Primary Coils	#4	11 V	Voltage & Frequency
A5	Single Primary Coil with magnet alignment	#1	5 V	Frequency & Duty cycle
A6	Linear array of Primary Coils	#5	12 V	Frequency & Duty cycle
A7	Single movable Primary Coil	#2	12 V	Voltage & Frequency
A8	Single oblong Primary Coil	#4	11 V	Voltage & Frequency
A9	Single Primary Coil with magnet alignment	#1	15 V	Voltage & Frequency
A10	Single Primary Coil without magnet	#1	19 V	Frequency & Duty cycle
A11	Single Primary Coil without magnet	#1	5 V	Frequency & Duty cycle
A12	Single oblong Primary Coil	#4	5 V	Frequency & Duty cycle
A13	Linear array of Primary Coils	#5	12 V	Voltage & Frequency
A14	Two oblong Primary Coils	#4	12 V	Frequency & Duty cycle
A15	Single Primary Coil, user assisted alignment	#2	12 V	Voltage & Frequency
A16	Single triangular Primary Coil	#6	5 V	Frequency & Duty cycle
A17	Single Primary Coil	#1	15 V	Voltage & Frequency
A18	Single Primary Coil, user assisted alignment	#2	12 V	Voltage & Frequency
A19	Dual Primary Coils	#5	12 V	Frequency & Duty cycle
A20	Single oblong Primary Coil	#4	12 V	Voltage & Frequency
A21	Linear array of Primary Coils	#5	12 V	Frequency & Duty cycle
A22	Single oblong Primary Coil	#4	12 V	Voltage & Frequency
A23	Single oblong Primary Coil	#4	12 V	Voltage, Frequency & Duty Cycle
A24	Single Primary Coil	#1	5 V	Frequency & Duty cycle
A25	Single oblong Primary Coil	#4	5 V	Frequency & Duty cycle
A26	Single triangular Primary Coil	#6	5 V	Frequency & Duty cycle
A27	Single Primary Coil	#8	12 V	Phase
A28	Linear array of Primary Coils	#5	5 V	Frequency & Duty cycle
A29	Single Primary Coil	#1	12 V	Voltage control
A30	Single oblong Primary Coil	#4	12 V	Frequency & Duty cycle
A31	Single oblong Primary Coil	#4	12 V	Frequency & Duty cycle

Design	Description	Family	Voltage	Control
B1	2D array of Primary Coils (Litz-wire based)	#3	20 V	Voltage
B2	2D array of Primary Coils (PCB based)	#3	20 V	Voltage
B3	2D array of Primary Coils (Litz/PCB hybrid)	#3	12 V	Phase
B4	Linear array of Primary Coils	#7	12 V	Phase
B5	Linear array of Primary Coils	#7	12 V	Phase
B6	Linear array of Primary Coils	#9	5 V	Phase

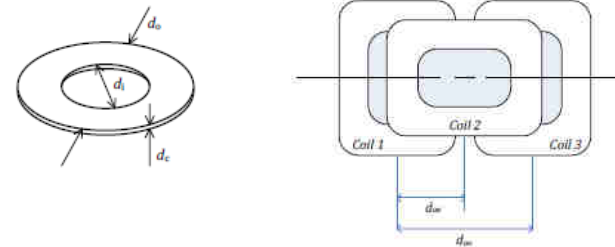

Family	Primary Coil Shape	Primary Coil Size
#1	Circular	Ø40...43 mm
#2	Circular	Ø33...39 mm
#2	Circular/hexagonal	Ø28...32 mm
#4	Oblong	65×57...70×60 mm ²
#5	Rectangular	46.5×37.5...53×45 mm ²
#6	Triangular	52×46...59×52 mm ²
#7	Square	45×45 mm ²
#8	Circular	Ø60 mm
#9	Oblong	45×34 mm ²

Source: WPC Qi specifications, Version 1.2

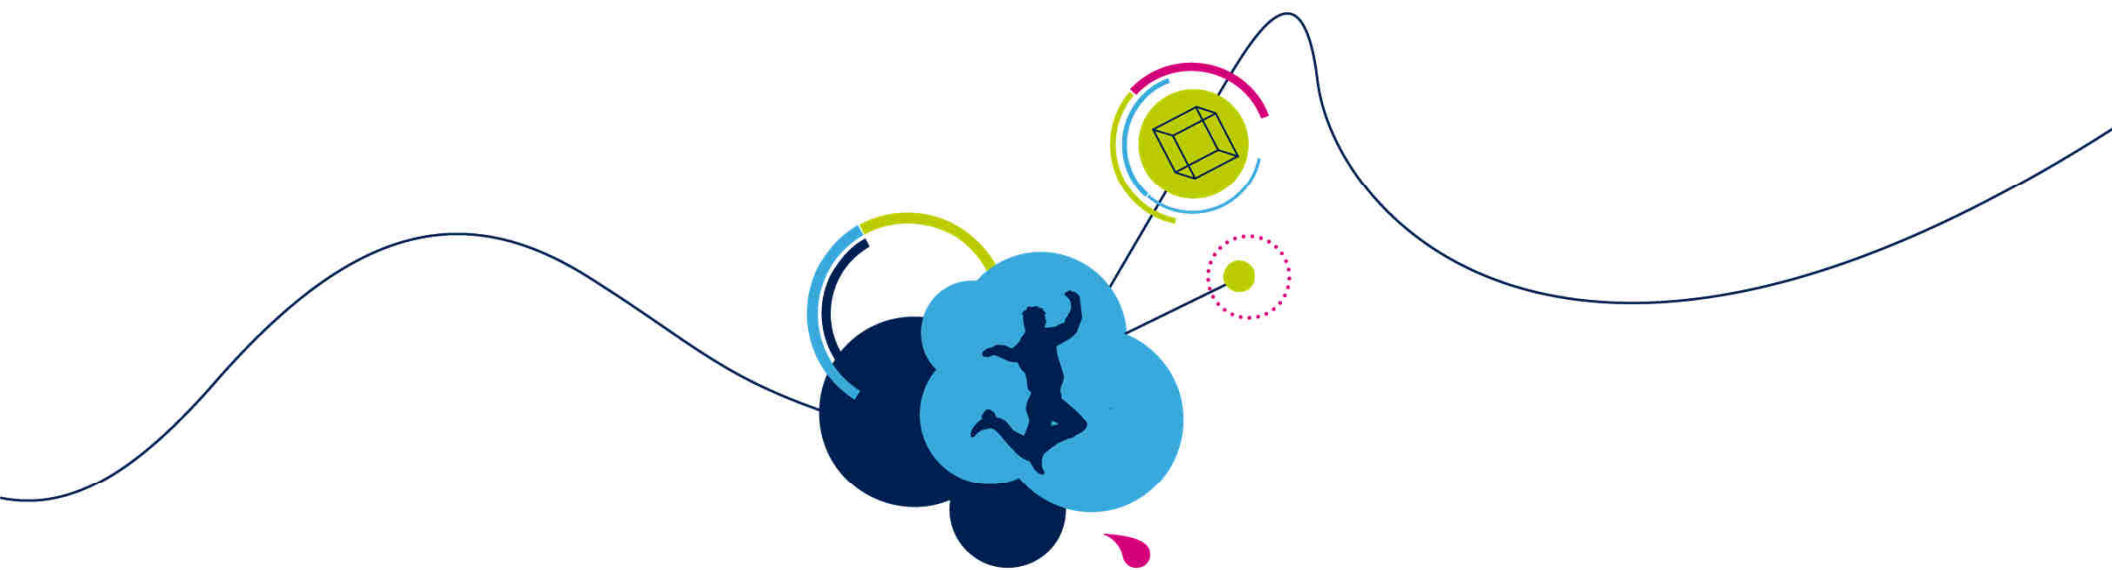

STWBC


Qi Wireless Battery Charging Transmitter IC



STWBC - Transmitter

14

Flexible, efficient, compliant with leading standards

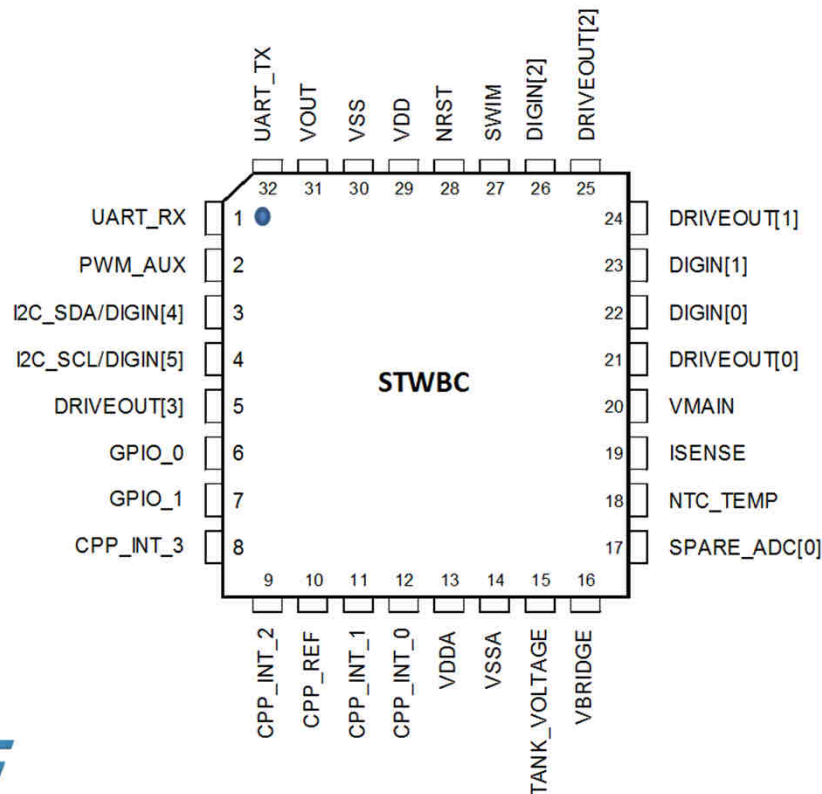

5V IC supply voltage

Two Firmware options

- Turn/key solution for quick design
- APIs available for customization

API: Available Peripherals

- ADC with 10 bit precision and 1MΩ input impedance
- UART
- I²C master fast-slow speed rate
- GPIOs
- Program memory: 32* kbyte EEPROM
(*available size for API depends on selected FW)

General application features:


- Low cost 2-layer PCBs
- Active object detection
- Graphical user interface for application monitoring
- Evaluation board


STWBC - Transmitter

15

Flexible, efficient, compliant with leading standards

STWBC OPERATIONAL BLOCKS AND Qi 1.1.2 A11 CONFIGURATION

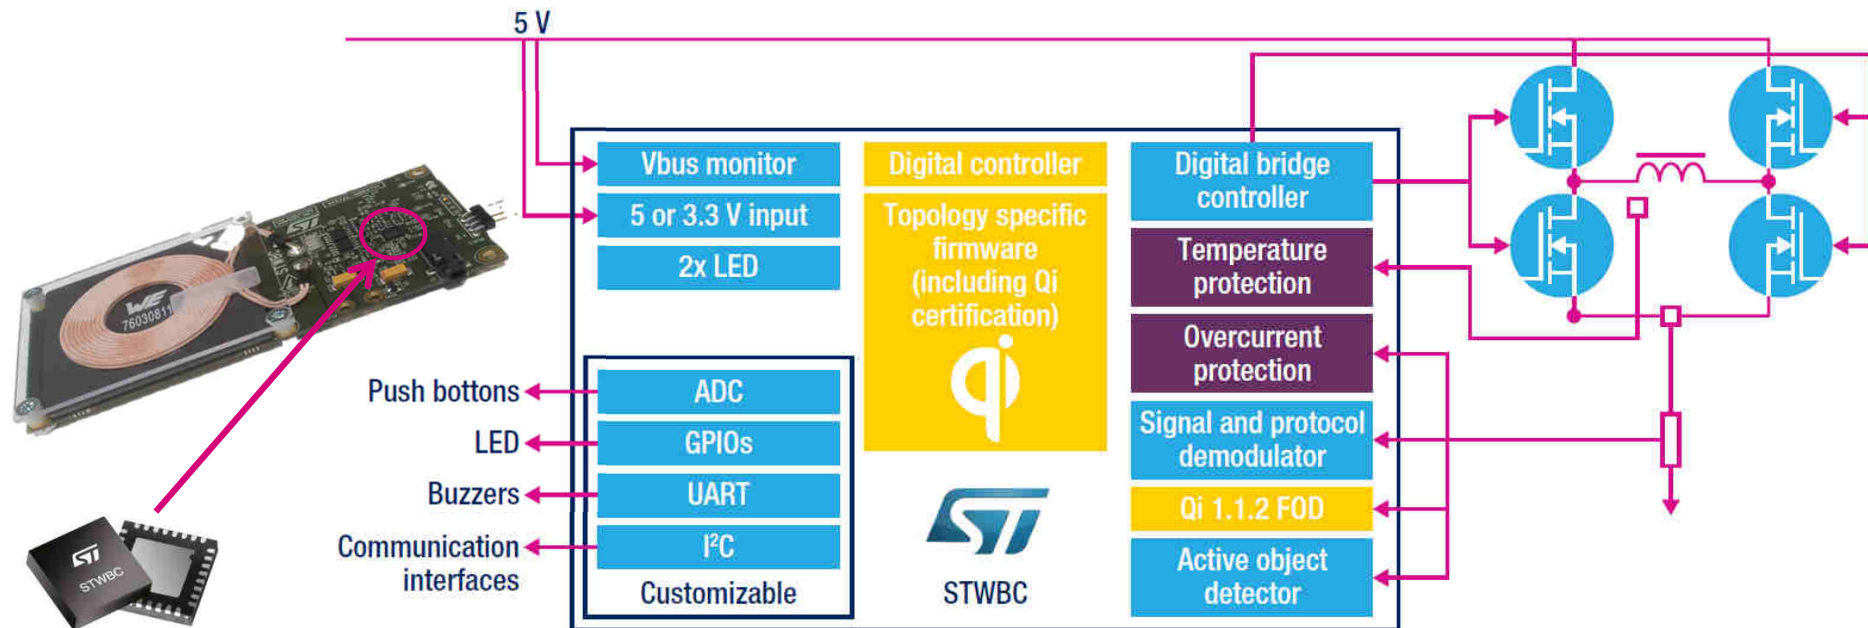

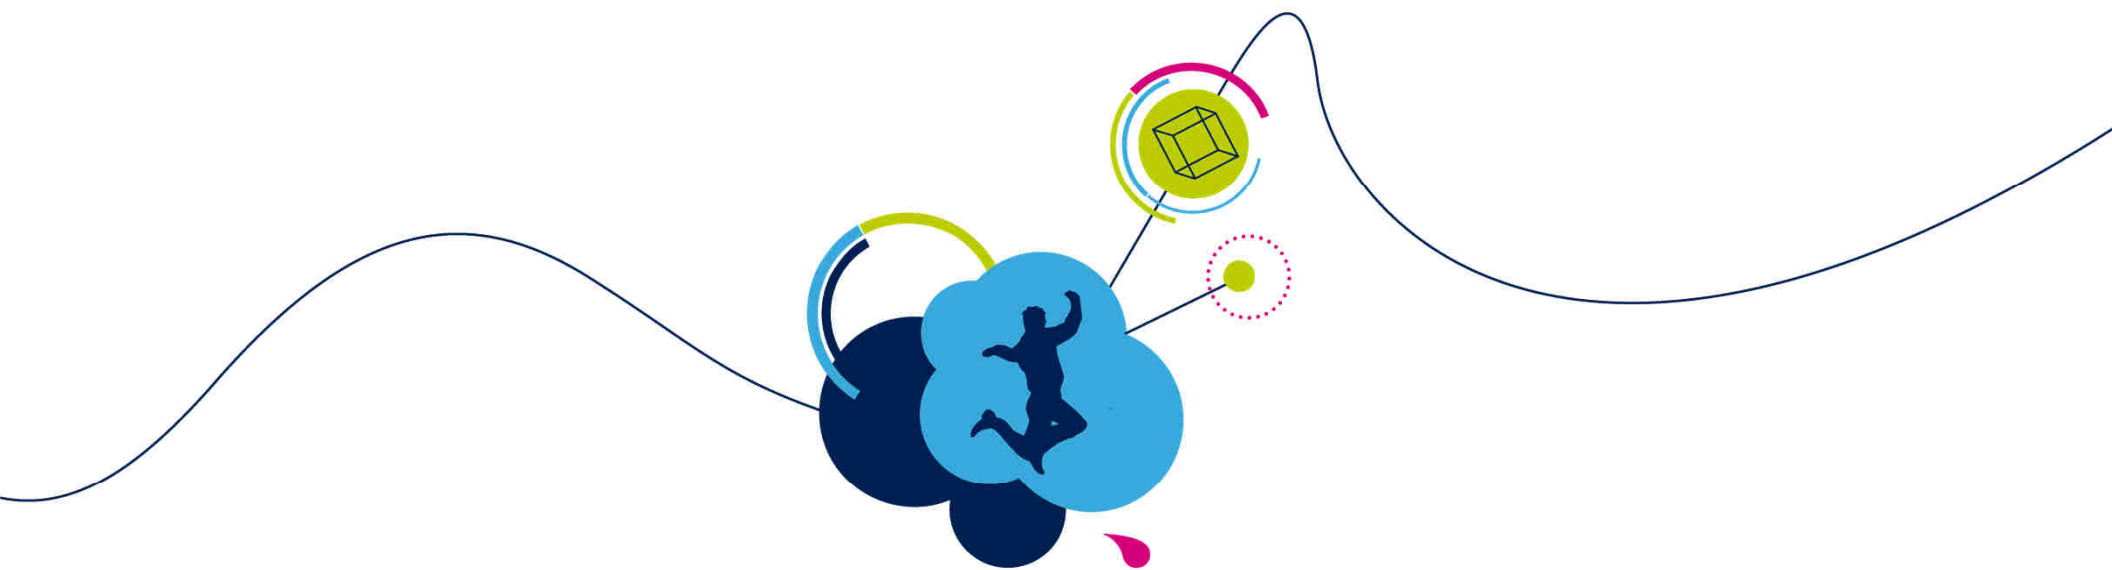


STWBC Transmitter

Qi Evaluation Boards

Qi-based Wearable TX Configuration

STWBC-WA – 2.5W

16

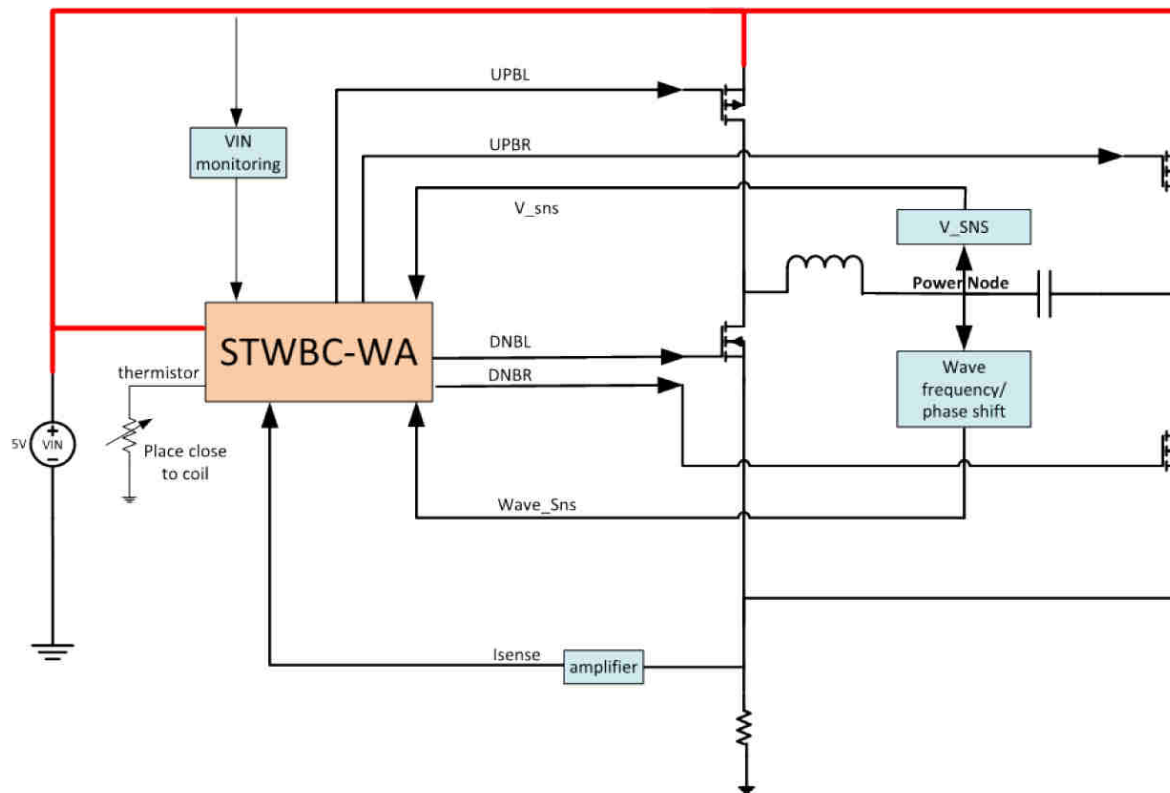


- System, bridge control and Qi protocol are handled by the STWBC-WA
- The transmitter is based on a Full-Bridge topology
- The inverter bridge is supplied by 5V input voltage
- Support up 2.5W with 20mm coil
- Scalable down to 1W with even smaller coil

Qi-based Wearable TX Reference Board

STWBC-WA – 2.5W STEVAL-ISB045V1


- 2-Layer PCB and single-side placement

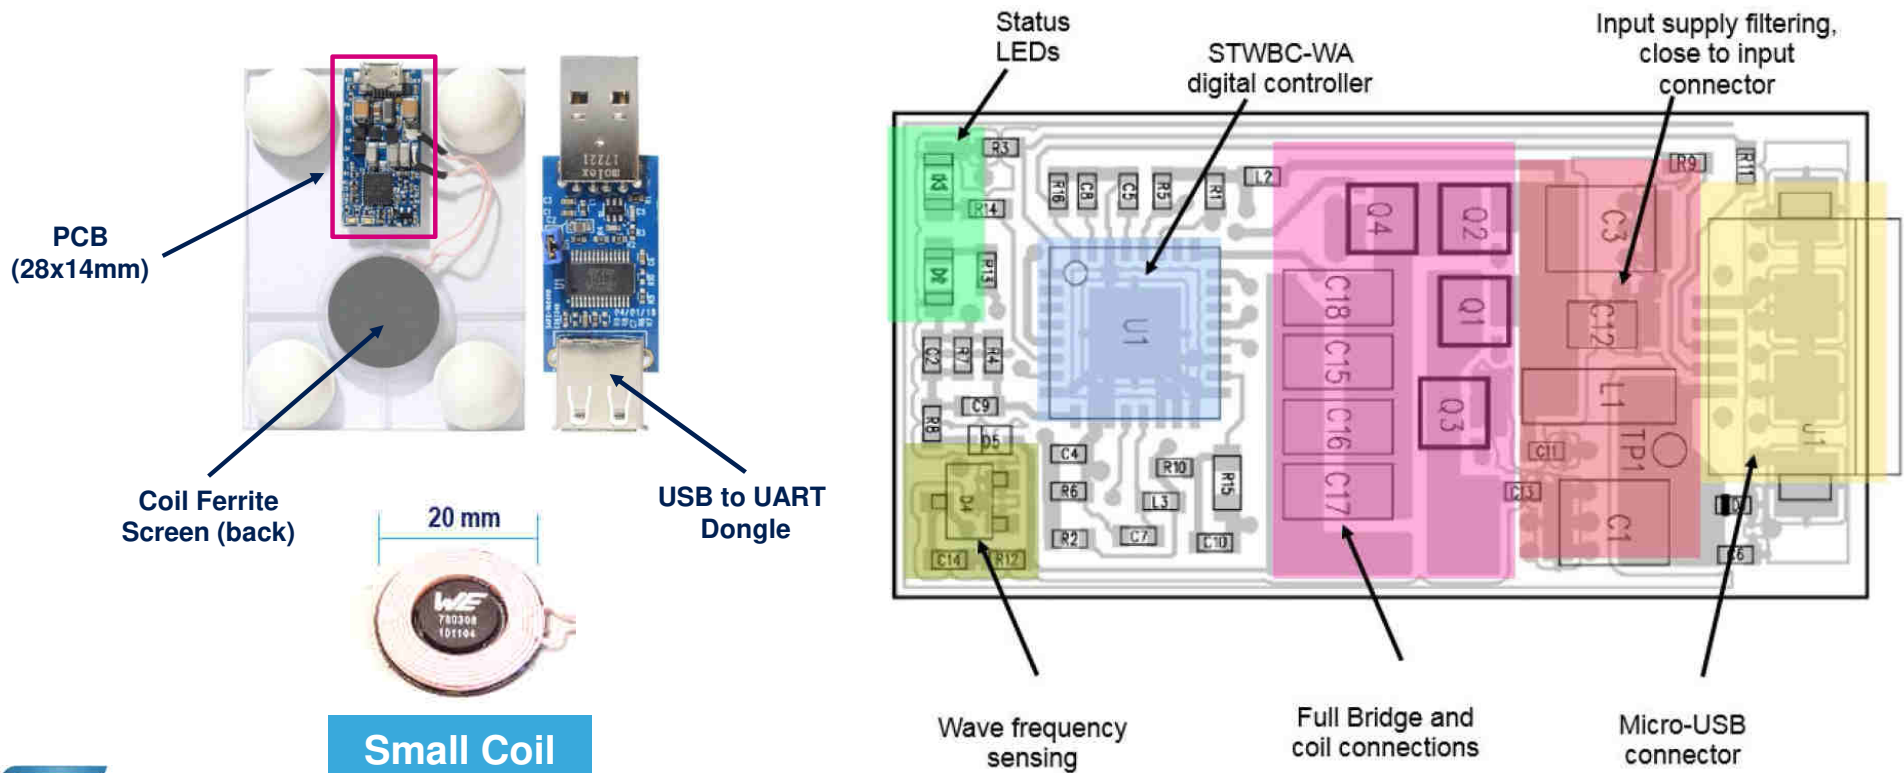

STWBC - A11 Transmitter Configuration

18

- 5W Qi, 1-Coil, 5V supply
- A11 requires accurate frequency control:
 - Operating frequency range 110kHz – 205kHz
 - Duty cycle 50%-10% @ 205kHz

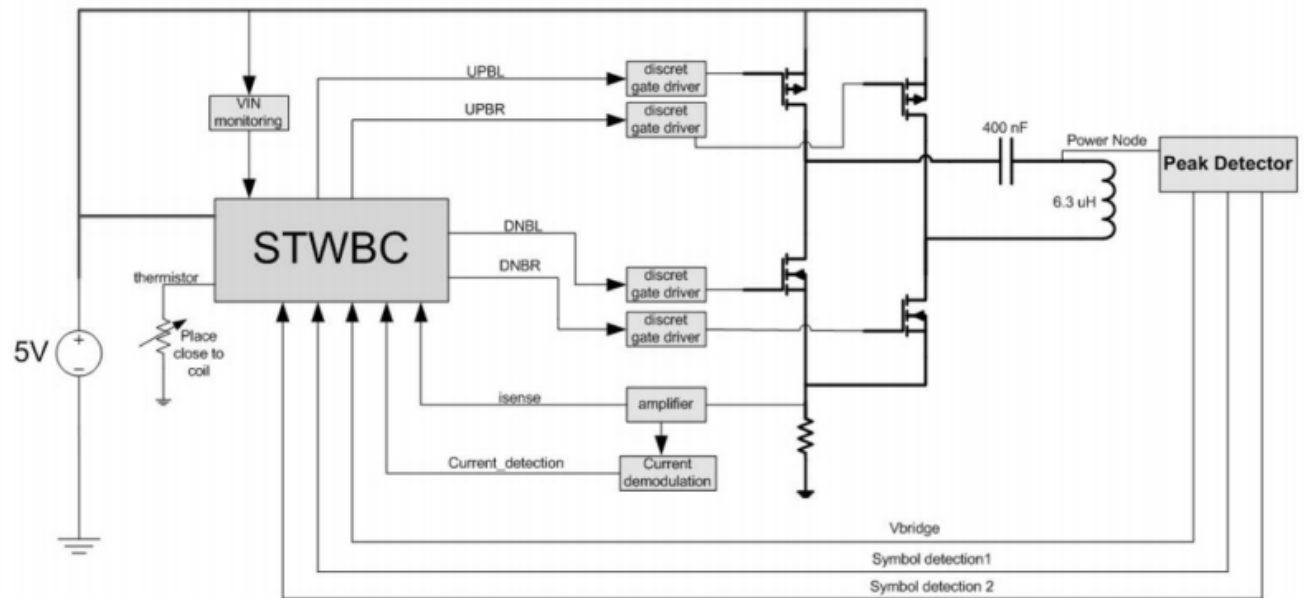


Transmitter Reference Board

STWBC 5W A11 – STEVAL-ISB027V1


19

2-Layer PCB and single-side placement

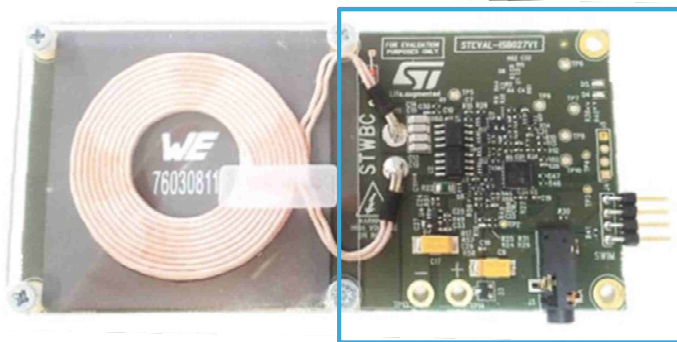

Standby


- **3mW** consumption
- Ping active
- FOD active

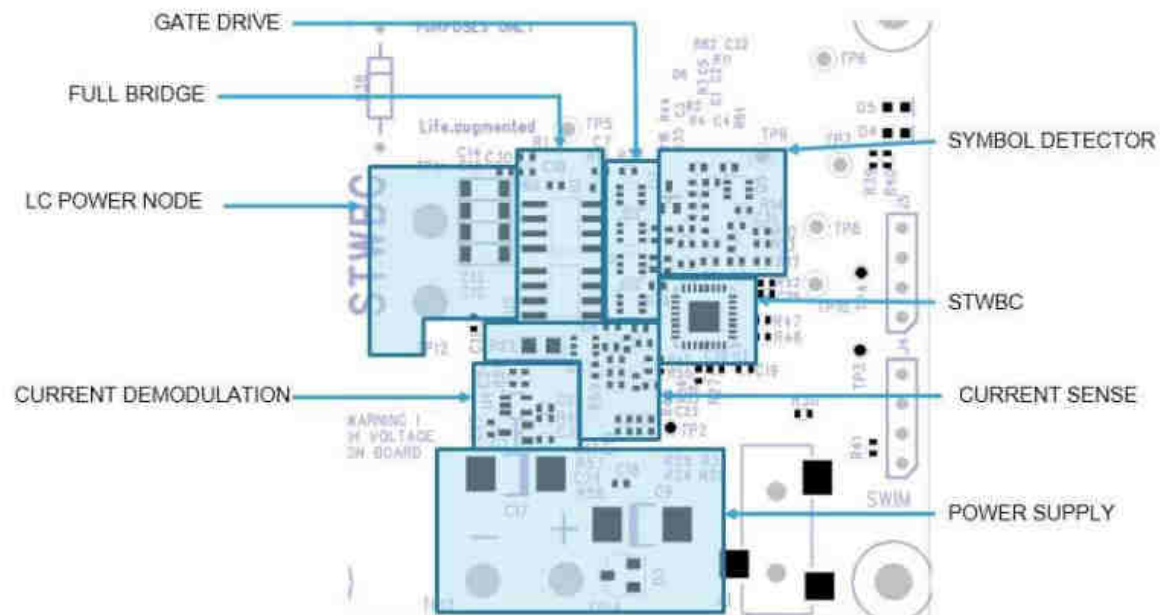

15W EPP Transmitter Configuration

STWBC-EP MP-A10


20

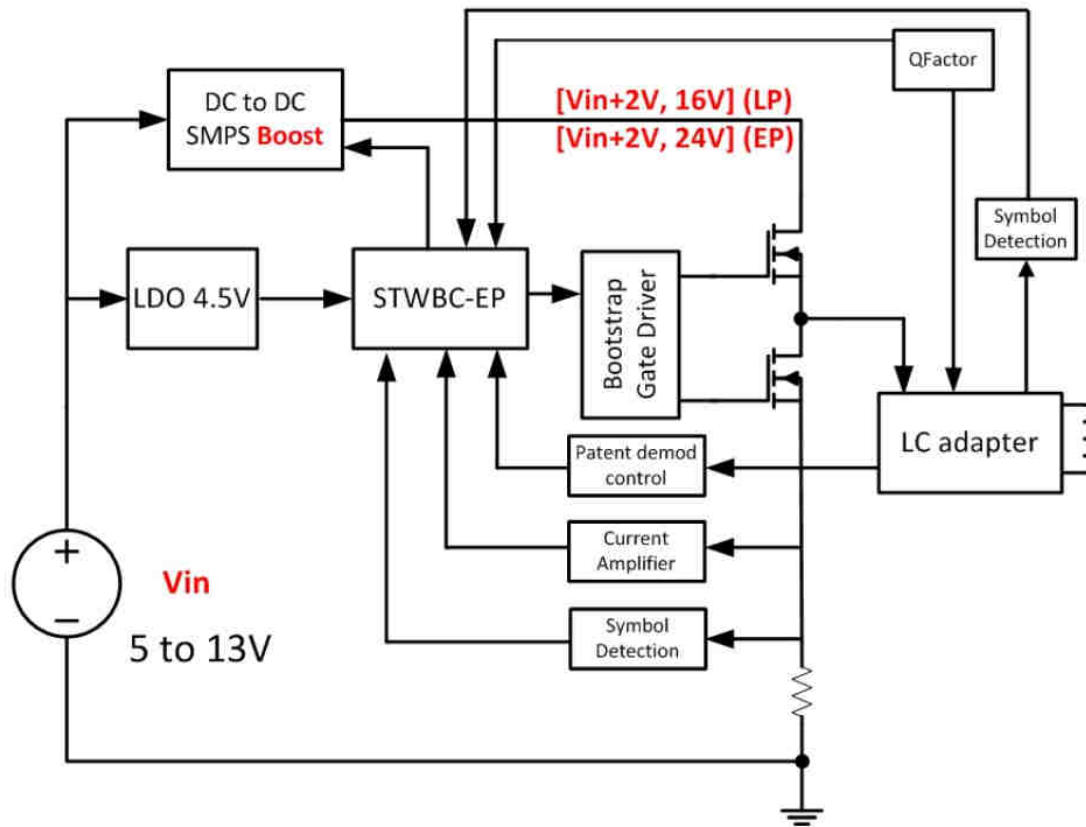

- Qi 1.2.3 EPP (Extended Power Profile) up to 15W
- Based on a half-bridge topology
- Support Basic Power Profile as well, up to 5W
- Wide supply voltage range, 5 to 13V

21


- **16mW** consumption
- Ping active
- FOD active

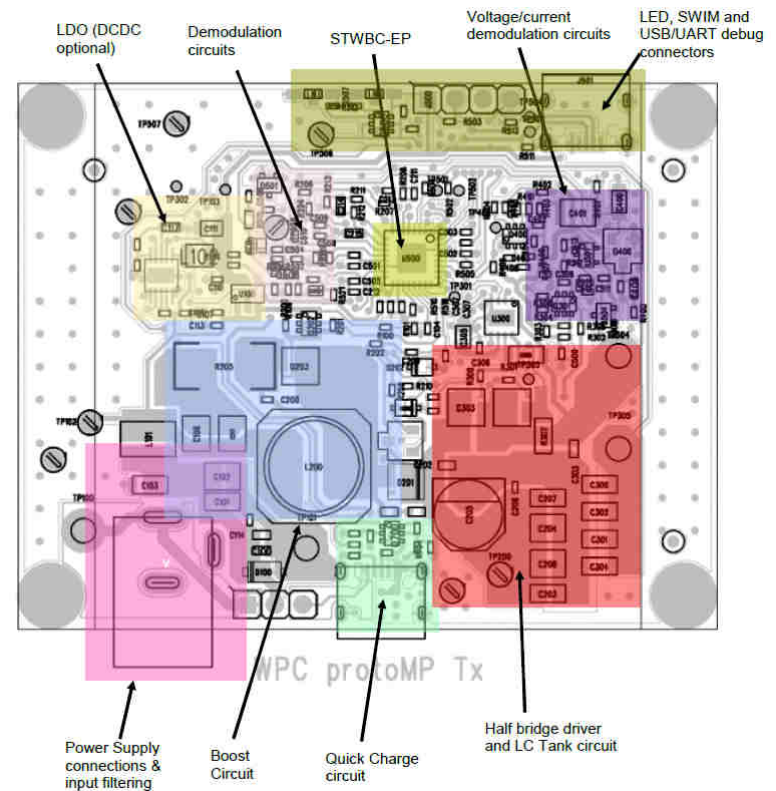

3-coil 15W EPP Transmitter Configuration

STWBC-MC MP-A15

22

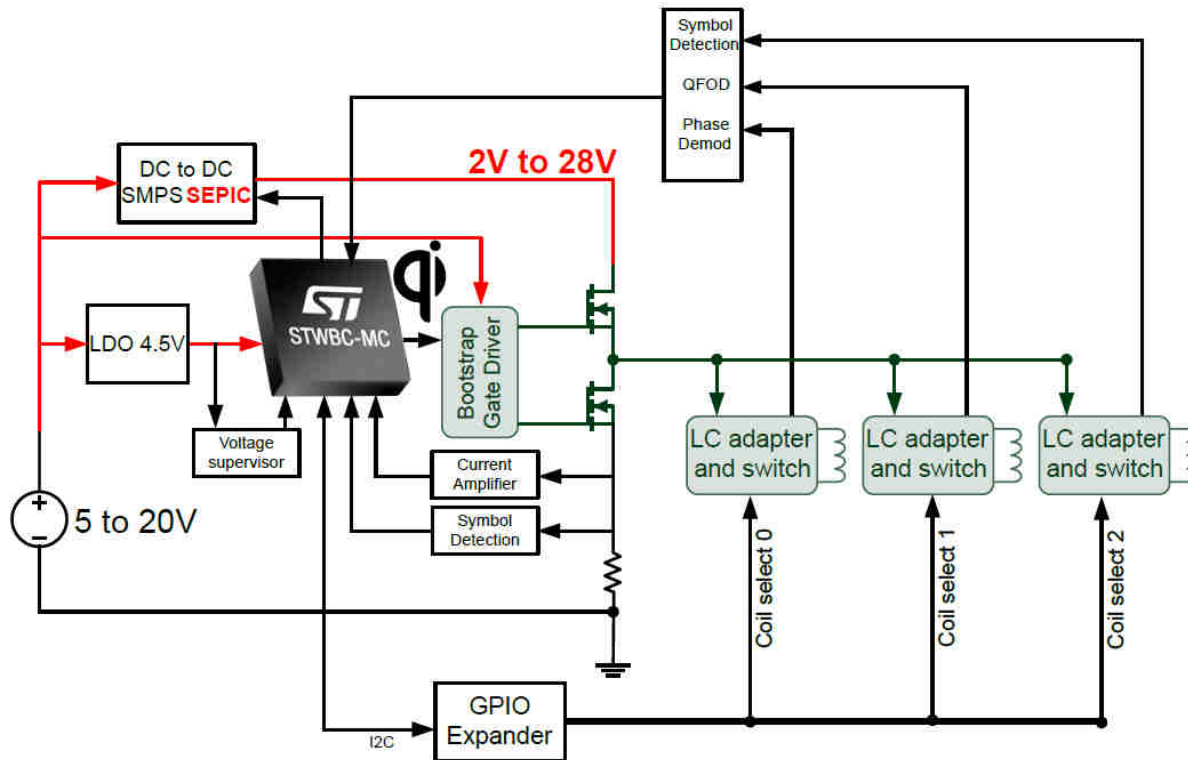



- Qi 1.2.4 EPP (Extended Power Profile) up to 15W and BPP up to 5W
- 127.7 kHz fixed frequency
- **Fast Charge support**
- Wide supply voltage range, 5 to 20V, with USB-C and support for legacy 5V USB

3- coil Transmitter Reference Board

STWBC-MC 15W MP-A15 STEVAL-ISB047V1

23


2-Layer PCB and single-side placement

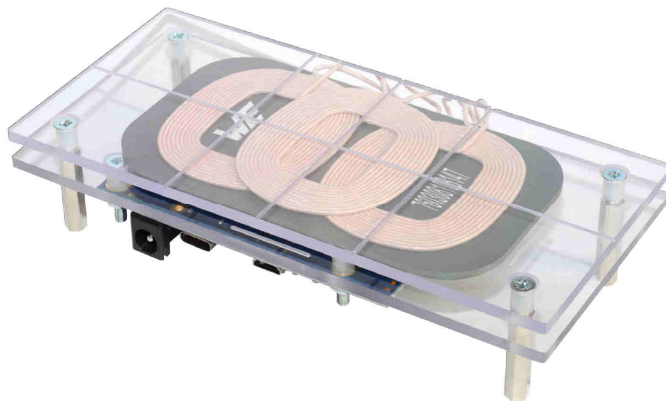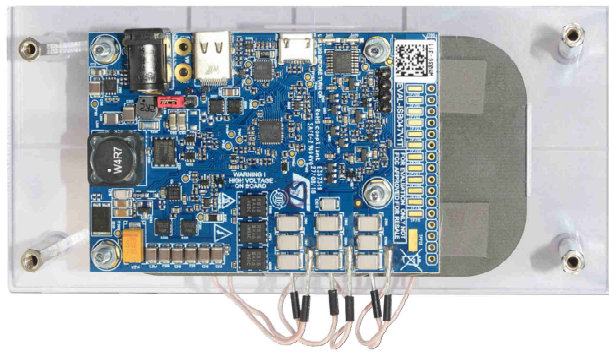

1. Test point for debugging only (may be removed)
2. LED, SWIM and USB/UART debug connectors
3. Sensing detection circuits
4. Coil selection and detection
5. STWBC-MC
6. USB PD/QC IO charger
7. Voltage/current demodulation circuits
8. Half bridge driver and LC Tank circuit
9. Jack power supply connections and input filtering
10. Sepic circuit
11. LDO


Standby

- 17mW consumption
- Ping active
- FOD active

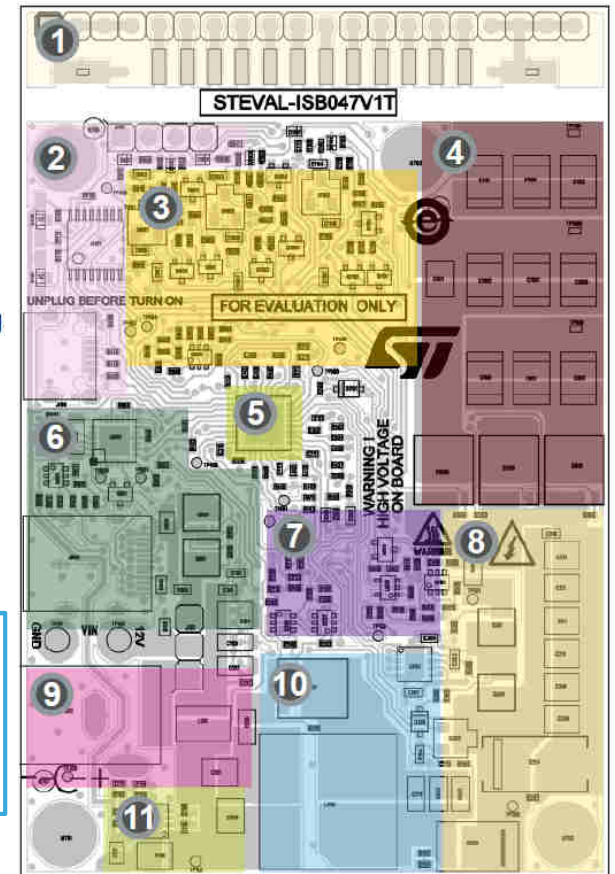


STWBC-EP 5W or 15W use cases

24

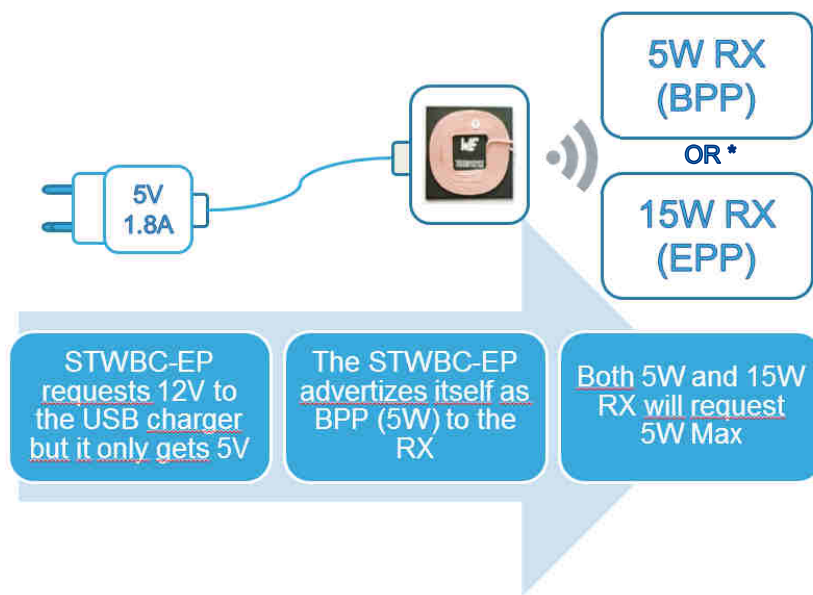

STWBC-EP supplied at 5V

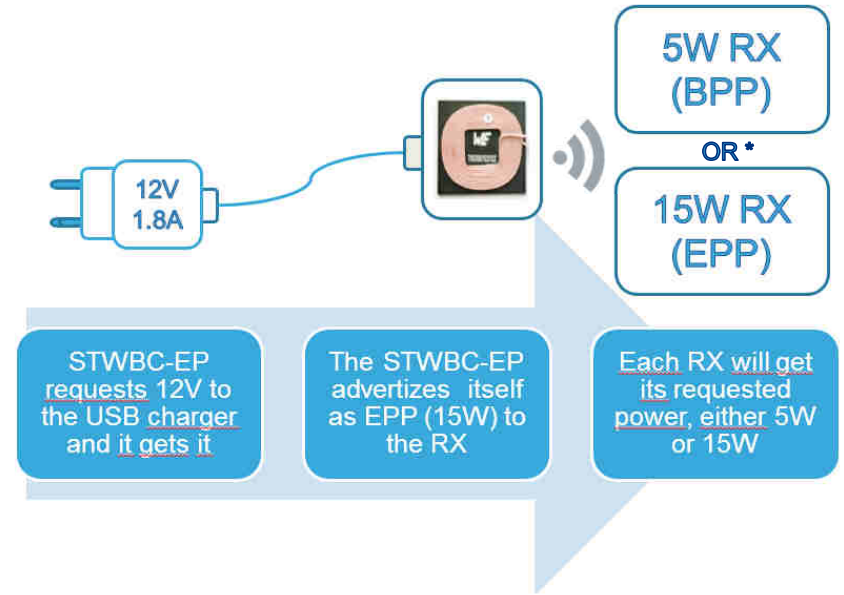

STWBC-EP supplied at 12V


Wireless Battery Charger TX

25

STWBC-WA - STEVAL-ISB045V1

TX for Wearable (2.5W)

- IC: STWBC-WA
- **20 mm Coil**
- 2.5W delivery at RX side
- 5V Supply
- Compatible with STEVAL-ISB043V1 RX



Available

STWBC-EP - STEVAL-ISB044V1



15
Watts

Certified Wireless Charger (15W)

- IC: STWBC-EP
- MP-A10 Design, Qi 1.2.3 Certified
- Support BPP and EPP (5W/15W)
- Foreign Object Detection (FOD)
- 5-13V input voltage range
- Half-Bridge topology
- Voltage/Frequency Control
- Graphical Interface for testing




Available

STWBC - STEVAL-ISB027V1



A11 Certified Wireless Charger (5W)

- IC: STWBC
- Qi A11 1.1.2 Certified (1.2 BPP Ready) ref. design
- Foreign Object Detection (FOD)
- Active presence detection
- Turn Key or API customization
- Standby efficiency:
 - 3mW consumption
 - FOD active in standby



Available


STWBC-MC - STEVAL-ISB047V1



15
Watts

Certified Wireless Charger (15W)

- IC: STWBC-MC
- Qi 1.2.4 Certified
- Support BPP and EPP (5W/15W)
- Foreign Object Detection (FOD)
- 5-20V Vin with USB-C
- Half-Bridge topology
- 127.7kHz Fixed Frequency
- Graphical Interface for testing



Available




STWLC

Qi/AirFuel Inductive Wireless Battery Charger Receiver IC




STWLC3x Simplified Application Diagram

27

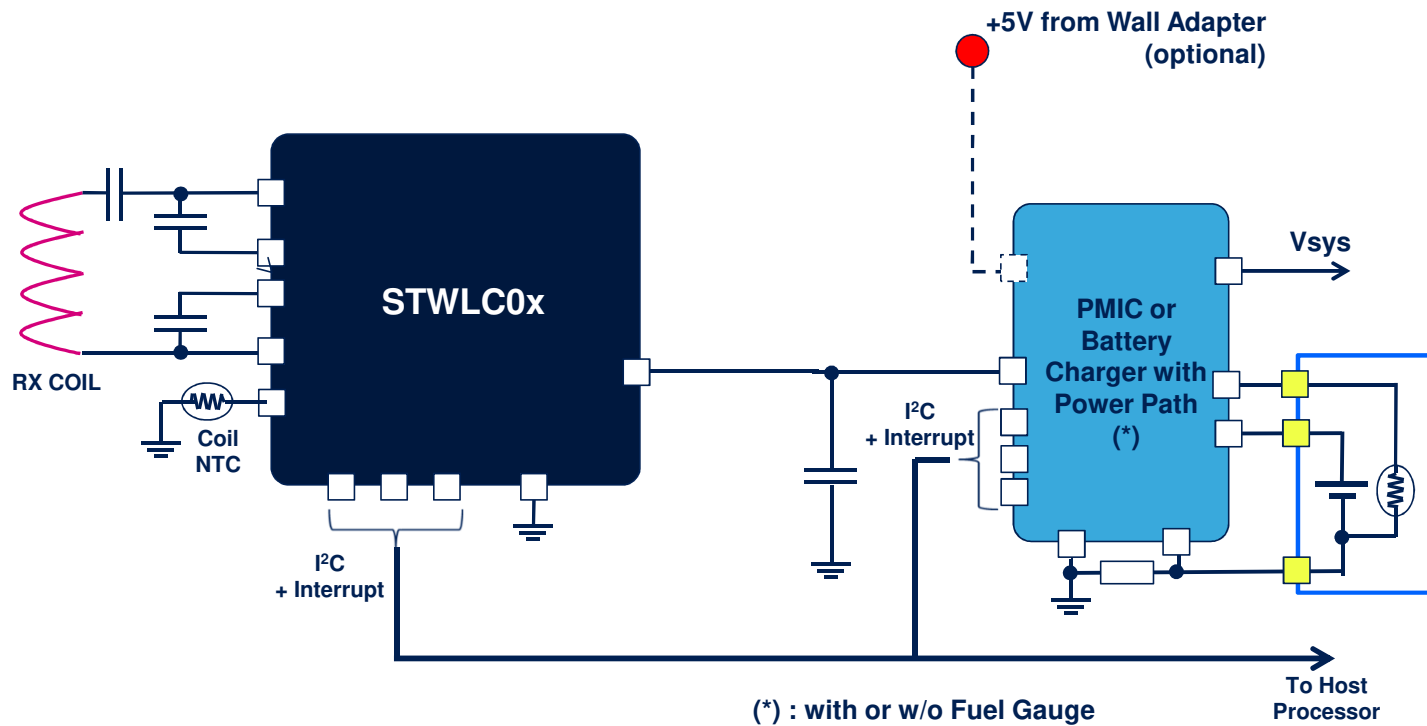

STWLC3x – 5/15W Dual Function TX/RX

28

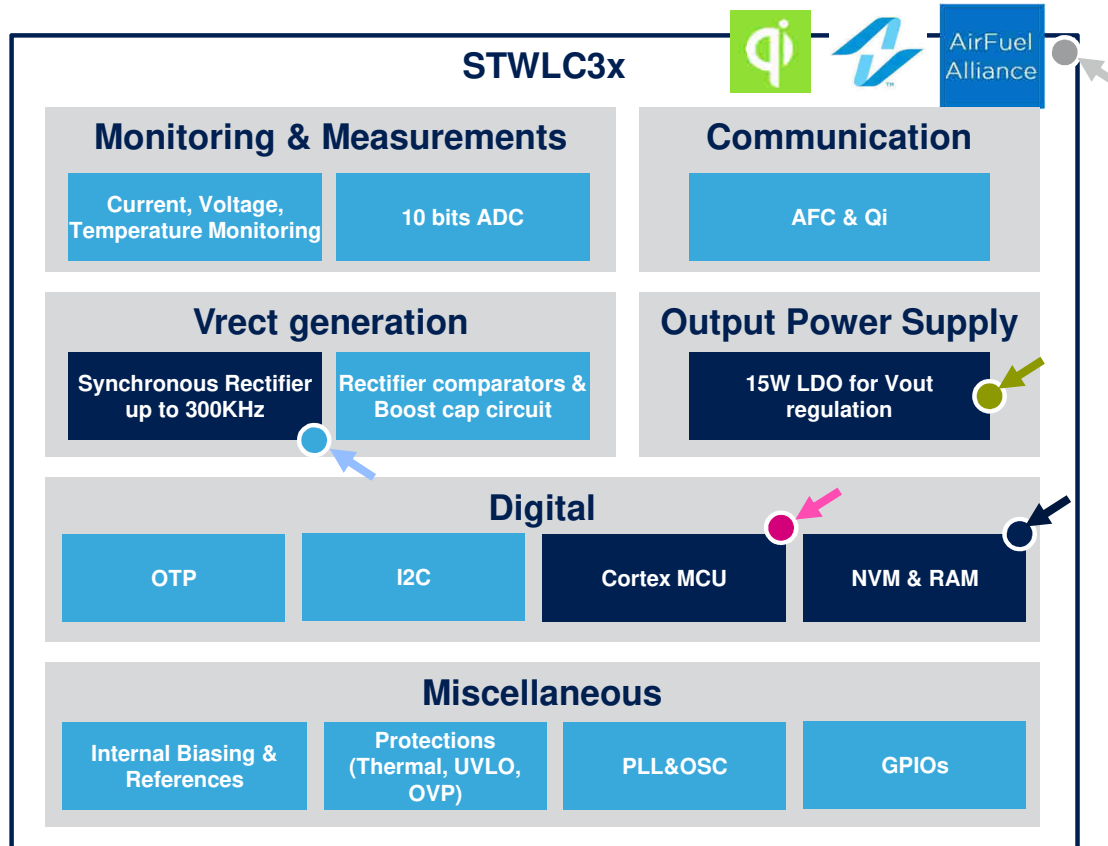



STWLC Receiver

Qi Evaluation Boards

Qi-based Wearable RX Reference Board


STWLC30 – 2.5W STEVAL-ISB043V1

30

- 3-Layer PCB and single-side placement
- Application area 10x6mm



26mm Coil

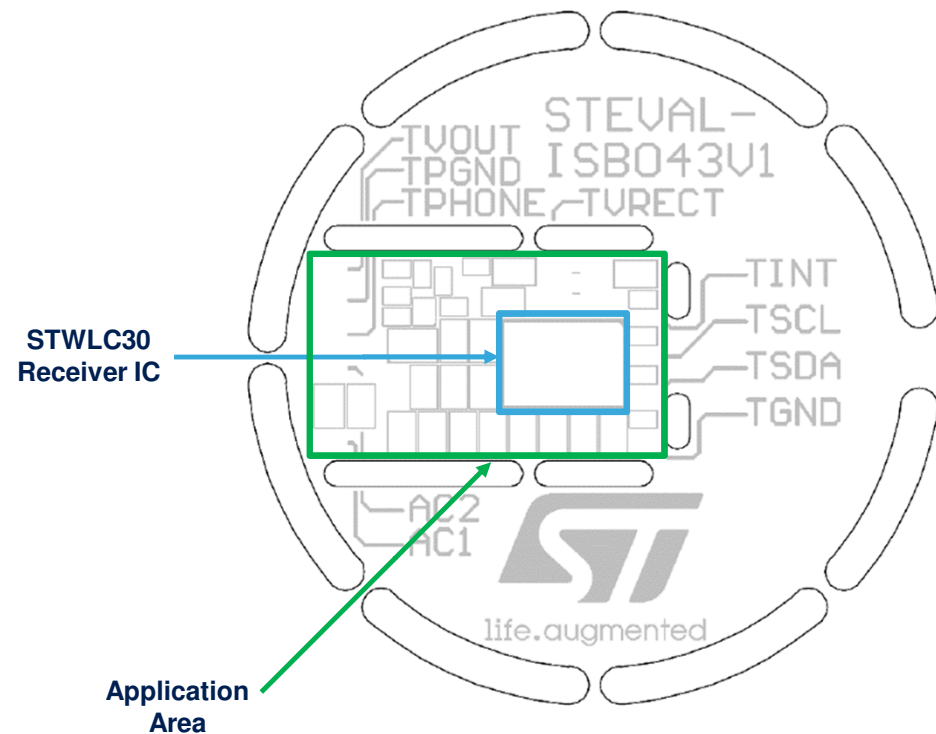

New Wearable Solution

31

Wireless power TX - RX kit – 2.5 Watt wireless delivery

Full Bridge 2.5W Transmitter based on STWBC-WA


5V 1A USB input power

Smart standby
Automatic receiver recognition
Open FOD for increased safety
Patented demodulation

Wurth 760308101104
20 mm diameter coil

2-layer PCB with optimized eBOM possible
remote coil w/ dedicated tuning

Turnkey solution customization via GUI

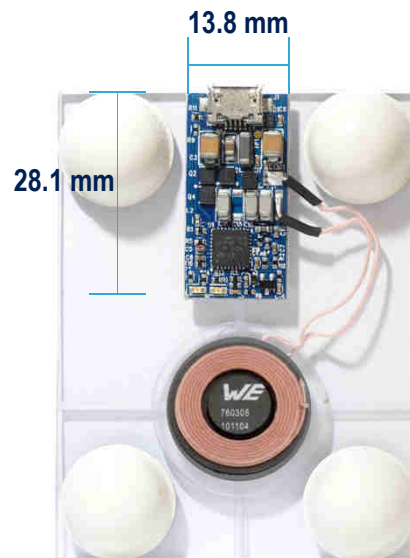

STEVAL-ISB045V1



STEVAL-ISB043V1

2.5W Receiver based on STWLC30

• 5V output voltage

- Space saving solution: 6x10mm
1mm total thickness (PCB + BOM)
- Coil Rx –Wurth 760308101309

Max. Z @ 2.5 W: 4 mm
Output Leakage: <1uA

67% total system efficiency with 1mm gap

Flip Chip 2.68mm x 4.026mm



Available Now

Available now


Receiver Reference Board

STWLC33 – 5W/15W Qi/AirFuel STEVAL-ISB042V1

- 4-Layer PCB and single-side placement
- Qi 1.2.3 and AirFuel Inductive certified
- 42x42mm coil
- TX capable up to 3W with same coil
- BPP/EPP RX auto-switch (it senses TX type)

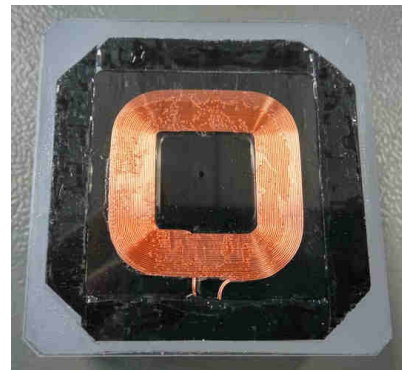
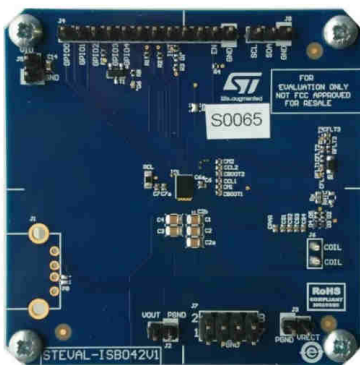


STWLC33
Receiver IC

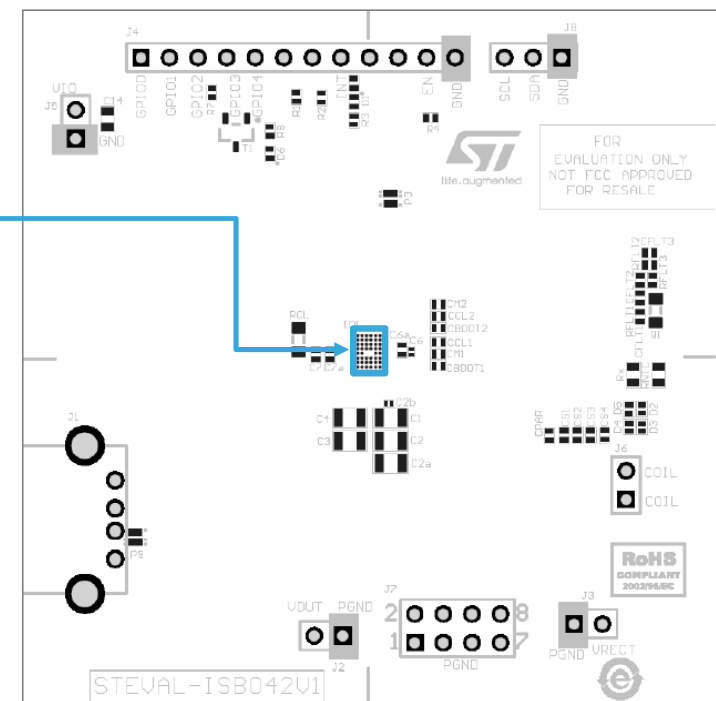

STWLC33 5W & 15W use cases

33

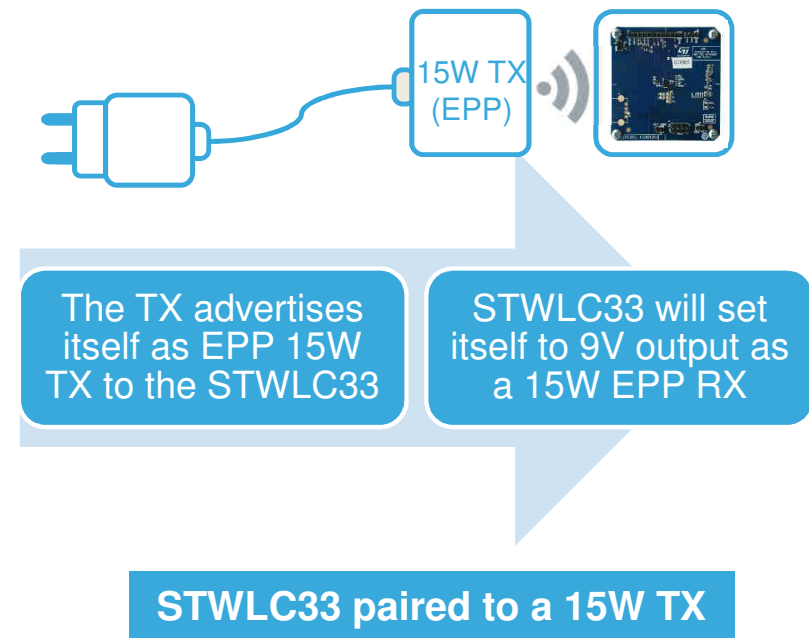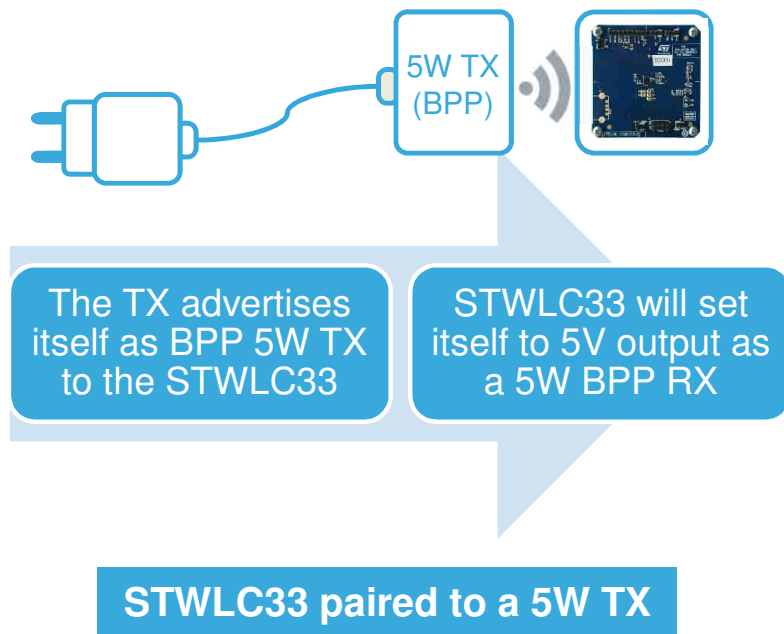

2.5-15W Wireless Battery Charger RX

STWLC3x

34

STWLC30 – STEVAL-ISB043V1

2.5
Watts

Qi-based Wireless Receiver for Wearables

- Up to 2.5W output power
- 26mm Coil
- Application area 10x6mm
- Total system efficiency 70%
- Optimized for 5V output operation
- Foreign Object Detection (FOD)
- I²C interface
- CSP 2.68x4.026mm, 400 µm pitch 52 balls



Available



STWLC33 – STEVAL-ISB042V1



5/15
Watts

Qi/AirFuel Inductive Certified Wireless Receiver with Transmit capability

- Up to 15 W output power in RX mode and **3W in TX mode**
- Qi 1.2 and AirFuel inductive standard
- Integrated high efficiency synchronous rectifier
- Low drop regulator
- Total system efficiency up to 80%
- 32-bit, 32 MHz ARM Cortex microcontroller with 32 kB memory, 8 kB RAM memory, 4 kB NVM for configuration
- 10-bit 8-channel A/D converter
- Up to 5 configurable GPIOs
- Integrated 5 V LDO for auxiliary features
- Precise voltage and current measurements for FOD function
- Overvoltage clamp protection
- HW FSK and ASK demodulators
- I²C interface
- CSP 2.68x4.026 mm, 400 µm pitch 52 balls




Available



What's Next?

36

2 Layers PCB with coil on top



Wireless Charging

ST Strengths

37

- Member of WPC and AirFuel Alliance
- System knowledge of both TX and RX sides
- BCD Technology well matches voltages present in these architectures
- IPs availability and integration capability
- TX and RX Silicon BOM fully covered by ST

Transmitter



Receiver





Thank You!