

PV harvester (based on SPV1050) and wireless transmission board of the kit STDES-IDS002V1



Features

- With the companion board STDES-ERH002V1 it realizes an autonomous wireless sensor node based on ULP energy harvester and battery charger SPV1050
- Typical use case with 3-axis accelerometer, temperature sensor and air pressure sensor on board
- PV modules soldered on top
- Lithium coin cell battery
- Compatible with STSW-IDS002V1, user-friendly software for remote reading of sensors and monitoring of electrical parameters
- With the companion board STDES-ERH001D (power monitoring board) it allows the monitoring for efficiency and all fundamental electrical parameters
- All ST component offer
- CE Certified
- RoHS and China RoHS compliant
- WEEE compliant
- Compliant with Directive 2006/66/EC

Description

The [STDES-ERH003V1](#) is an application example mounting on board two PV panels, a rechargeable 120mA Li-Ion battery, the harvesting and power manager system (based on [SPV1050](#)), a set of sensors (temperature, air pressure and a 3-axis accelerometer), a low power microcontroller and an RF Sub-Giga transmitter for wireless transmission.

The STDES-ERH003V1 is part of the kit [STDES-IDS002V1](#). Together with the companion board [STDES-ERH002V1](#) (included in the same kit), they are an example of autonomous wireless multi sensor node powered by photovoltaic panels.

The dedicated [STSW-IDS002V1](#) provides a user-friendly GUI able to show the data sensed by the STDES-ERH003V1 and received by the STDES-ERH002V1.

The kit includes a second companion board, [STDES-ERH001D](#), allowing the GUI to show also the TEG module and battery electrical characteristics, SPV1050 conversion efficiency and MPPT accuracy.

Product summary

STDES-IDS003V1: SPIDeR™ Autonomous wireless multi-sensor node powered by TEG and based on SPV1050

STDES-ERH003V1: PV harvester (based on SPV1050) and wireless transmission board of the kit STDES-IDS002V1

STDES-IDS002V1: SPIDeR™ Autonomous wireless multi-sensor node powered by PV cells and based on SPV1050

STDES-ERH001D: Power monitoring board of the kits STDES-IDS003V1 and STDES-IDS002V1

SPV1050: Ultra low power energy harvester and battery charger with embedded MPPT and LDOs

STSW-IDS002V1: GUI for STEVAL-ISV021V1, STDES-IDS002V1 and STDES-IDS003V1

1 Bill of material

Table 1. Bill of material

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
1	1	BT1	Li-Ion, 3v6-120 mAh, 2450	Li-Ion Battery	MULTICOMP	LIR2450
2a	1	U13		Battery holder	KEYSTONE	3008
2b	0	U13 (DNM, alternate part)		Thin Film battery	ST	EFL700A39
3	9	C1,C2,C3,C7, C13,C15,C33, C42,C43	100nF	MLCC Capacitor	MURATA	GCM155R71C104KA55
4	1	C4	22µF	MLCC Capacitor	TDK	C1608X5R0J226M
5	2	C5, C6	6pF	MLCC Capacitors	MULTICOMP	MCCA000087
6	0	C8 (DNM)		MLCC Capacitors		
7	2	C9, C20	10µF	MLCC Capacitors	MURATA	GRM188R60J106ME47D
8	5	C10,C14,C34, C35,C37	1µF	MLCC Capacitors	MURATA	GCM188R71E105KA64
9	1	C38, C45 (DNM)	2.2µF	MLCC Capacitors	MURATA	GRM188R61E225KA12D
10	1	C11	100pF	MLCC Capacitors	MURATA	GRM1555C1H101JZ01D
11	3	C12,C16,C28	330pF	MLCC Capacitors	YAGEO	CC0402KRX7R9BB331
12	0	C17, Ctun1 (DNM)		MLCC Capacitors		
13	0	C18, C23 (DNM)		MLCC Capacitors		
14	1	C19	220pF	MLCC Capacitors	AVX	06035A221JAT2A
15	2	C21, C31	220pF	MLCC Capacitors	MURATA	GRM1555C1H221JA01D
16	1	C22	7pF	MLCC Capacitors	MURATA	GRM1555C1H7R0BA01D
17	1	C24	2.4pF	MLCC Capacitors	MURATA	GRM1555C1H2R4BA01D
18	1	C25	3.6pF	MLCC Capacitors	MURATA	GRM1555C1H3R6CA01D
19	2	C26, C27	18pF	MLCC Capacitors	MULTICOMP	MC0402N180J500CT
20	1	C29	10nF	MLCC Capacitors	MURATA	GCM155R71H103KA55
21	1	C30	1.5pF	MLCC Capacitors	MURATA	GRM1555C1H1R5WA01D
22	1	C32	2pF	MLCC Capacitors	MULTICOMP	MC0402N2R0C500CT
23	1	C36	100nF	MLCC Capacitors	TDK	C1608X7R1H104K080AA
24	2	C39, C40	47µF	MLCC Capacitors	KEMET	C0805C476M9PACTU
25	1	C41	10nF	MLCC Capacitors	MURATA	GRM188R71H103KA01D
26	1	C44	470nF	MLCC Capacitors	MURATA	GRM188R71A474KA61D
27	1	CN1	1A	USB-MICRO-B	TE CONN	1981568-1
28	1	CN2	100 Mils 1 row, 2 ways	2 pins plug	MULTICOMP	MC34745
29	0	Ctun2 (DNM)		MLCC Capacitors		

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
30	1	CX1	2.2 μ F	MLCC Capacitors	KEMET	C0805C225K4RAC
31	4	D1,D2,D3,D4	0.1A, 100V	Diode	ST	TMMBAT41
32	0	D6 (DNM)	1A, 20V	Diode	ST	BAT20J
33	1	J1	5pin, 50 Ω	Socket for Antenna	RS	526-5785
34	1	J2	1 row, 2 way	2 pins plug	TOPTECK	PH1S25-140GB 6/3-L
35	0	J4 (DNM)	1 row, 3 way	3 pins plug	FCI	95293-101-03LF
36	5	J3, J5, J6, J7, J9	1 row, 3 ways	3 pins plug	FCI	95293-101-03LF
37	1	J8	2 rows, 8 ways	16 pins plug	SAMTEC	SMH-108-02-G-D
38	1	JP1	2 rows, 6 ways	6 pins plug	MOLEX	87758-0616
39	1	L1	10 μ H	Inductor	MURATA	LQM21FN100M70L
40	1	L2	27nH	Inductor	COILCRAFT	0402CS-27NXGLU
41	1	L3	100nH	Inductor	MURATA	LQG15HSR10J02
42	0	L4 (DNM)		Inductor		
43	1	L5	3.6nH	Inductor	MURATA	LQG15HN3N6S02
44	1	L6	5.1nH	Inductor	MURATA	LQG15HN5N1S02
45	1	L7	0 Ω	Resistor	YAGEO	RC0402JR-070RL
46	1	L8	18nH	Inductor	MURATA	LQG15HN18NJ02
47	2	L9, L10	15nH	Inductor	MURATA	LQG15HN15NJ02
48	1	L11	4.7 μ H	Inductor	EPCOS	B82464A4472M
49	1	L12	22 μ H	Inductor	COILCRAFT	LPS4018-223
50	1	P1	1 row, 8 ways	8 ways connector	MULTICOMP	MC34753
51	13	R1 to R5, R16 to R20 R26 to R28	100 Ω	Resistor	YAGEO	RC0402FR-07100RL
52	2	R6, R7	10 Ω	Resistor	YAGEO	RC0402FR-0710RL
53	2	R8, R9	100k Ω	Resistor	YAGEO	RC0402FR-07100KL
54	4	R10,R11, R12,R13	10k Ω	Resistor	YAGEO	RC0402FR-0710KL
55	1	R14	560 Ω	Resistor	YAGEO	RC0402FR-07560RL
56	1	R15	0 Ω	Resistor	YAGEO	RC0402JR-070RL
57	2	R21, R29	750k Ω	Resistor	VISHAY	CRCW0603750KFKEA
58	1	R22	240k Ω	Resistor	VISHAY	CRCW0603240KFKEA
59	1	R23	120k Ω	Resistor	VISHAY	CRCW0603120KFKEA
60	1	R24	100k Ω	Resistor	YAGEO	RC0603FR-07100KL
61	1	R25	422k Ω	Resistor	PANASONIC	ERJ-3EKF4223V
62	2	R31, R32	2M Ω	Resistor	VISHAY	CRCW06032M00FKEA
63	1	R33	5.6M Ω	Resistor	VISHAY	CRCW06035M60FKEA
64	1	R34	1.8M Ω	Resistor	VISHAY	CRCW06031M80FKEA
65	2	R35, R38	3M Ω	Resistor	VISHAY	CRCW06033M00FKEA

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
66	1	R37	680k Ω	Resistor	TE-CONN	CRG0603F680K
67	1	R36	10M Ω	Resistor	VISHAY	CRCW060310M0FKEA
68	1	R39	5.36k Ω	Resistor	PANASONIC	ERA-3AEB5361V
69	1	R40	2.05k Ω	Resistor	VISHAY	CRCW06032K05FKEA
70	1	SW1	50mA push button	Push button	OMRON	B3U-1100P-B
71	4	SW2,SW4,SW6,SW7	5 Ω Dual SPDT switch/2:1 Multiplexer	Dual SPDT switch/2:1 Multiplexer	ST	STG3682QTR
72	4	SW3,SW5,SW8,SW9	0.5 Ω Dual SPDT switch	0.5 Ω dual SPDT switch	ST	STG5223QTR
73	2	SW10,SW11	0.5A slide switch	1 row, 3 ways slide switch	WURTH	450302014072
74	3	TP1, TP3, TP17	BLACK	TEST POINT	KEYSTONE	5001
75	2	TP2, TP4	RED	TEST POINT	KEYSTONE	5000
76	0	TP5 to TP16, TP18 (DNM)	TEST POINT	TEST POINT	-	-
77	1	U1	MCU	STM32 MCU	ST	STM32L151CBT6
78	1	U2	12 bits, 0.0625 $^{\circ}$ C resolution	T-SENSOR	ST	STTS751-0DP3F
79	1	U3	\pm 2g to \pm 16g Accelerometer	MEMS	ST	LIS3DHTR
80	1	U4	260-1260 hPa Pressure sensor	MEMS	ST	LPS25HTR
81	1	U5	Sub 1GHz transceiver	Wireless Transceiver	ST	SPIRIT1QTR
82	1	U6	8192 \times 8 bits (I2C mode)	E2PROM	ST	M24LR64E-RDW6T/2
83	1	U7	50mA voltage regulator	Voltage regulator	ST	STLQ50C-R
84	1	U9	85mA voltage regulator	Voltage regulator	ST	ST715MR
85	1	U10	150mA voltage regulator	Voltage regulator	ST	STLQ015M25R
86	1	U11	Harvester and battery charger	Harvester and battery charger	ST	SPV1050TTR
87	2	U12, U15	5V PV PANEL	PV-PANEL	PANSONIC	AM-1801CA
88	1	X1	4MHz Oscillator	Crystal Oscillator	MURATA	CSTCR4M00G53Z-R0

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
89	1	X2	32MHz Crystal Oscillator	Crystal Oscillator	ABRACON CORPORATION	ABS07-32.768KHZ-6-T
90	1	XTAL1	50MHz Crystal	Crystal Oscillator	TXC	7M-50.000MAAJ-T
91	1	U14	Ambient Light Sensor	Ambient Light Sensor	OSRAM	SFH 5711
92	1	R42	82kΩ	Resistor	ROHM	MCR03EZPFX8202
93	1	-	USB Cable (A, micro USB B)	USB Cable (A, micro USB B)		
94	1	J_1	868MHz to 915MHz SMA ANTENNA	ANTENNA	LPRS	WR868

2 Schematic diagrams

Figure 1. STDES_ERH003V1 - board schematic (1 of 4)

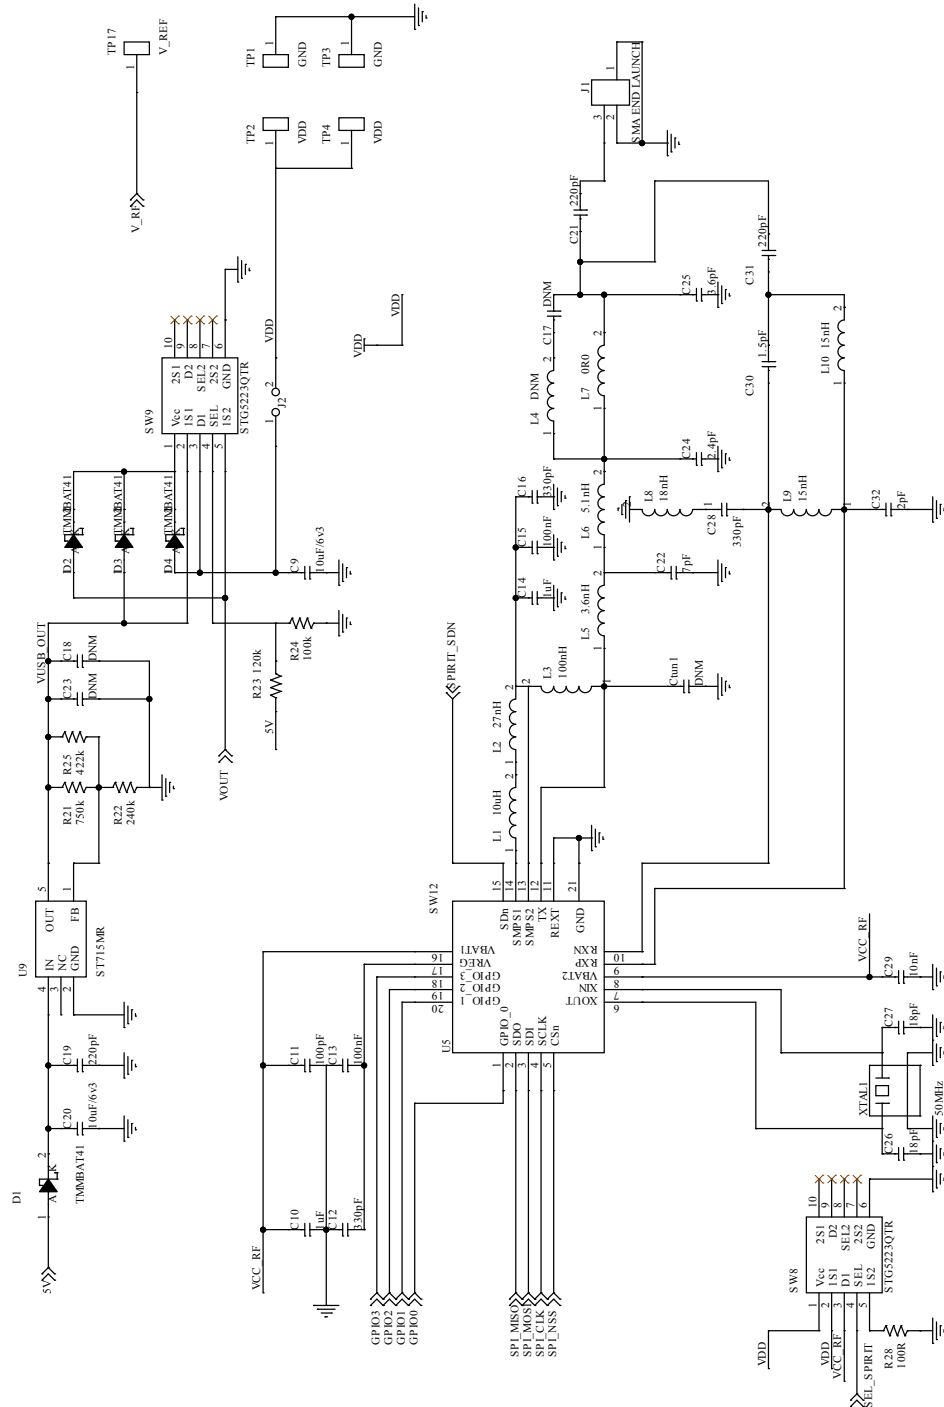


Figure 3. STDES_ERH003V1 - board schematic (3 of 4)


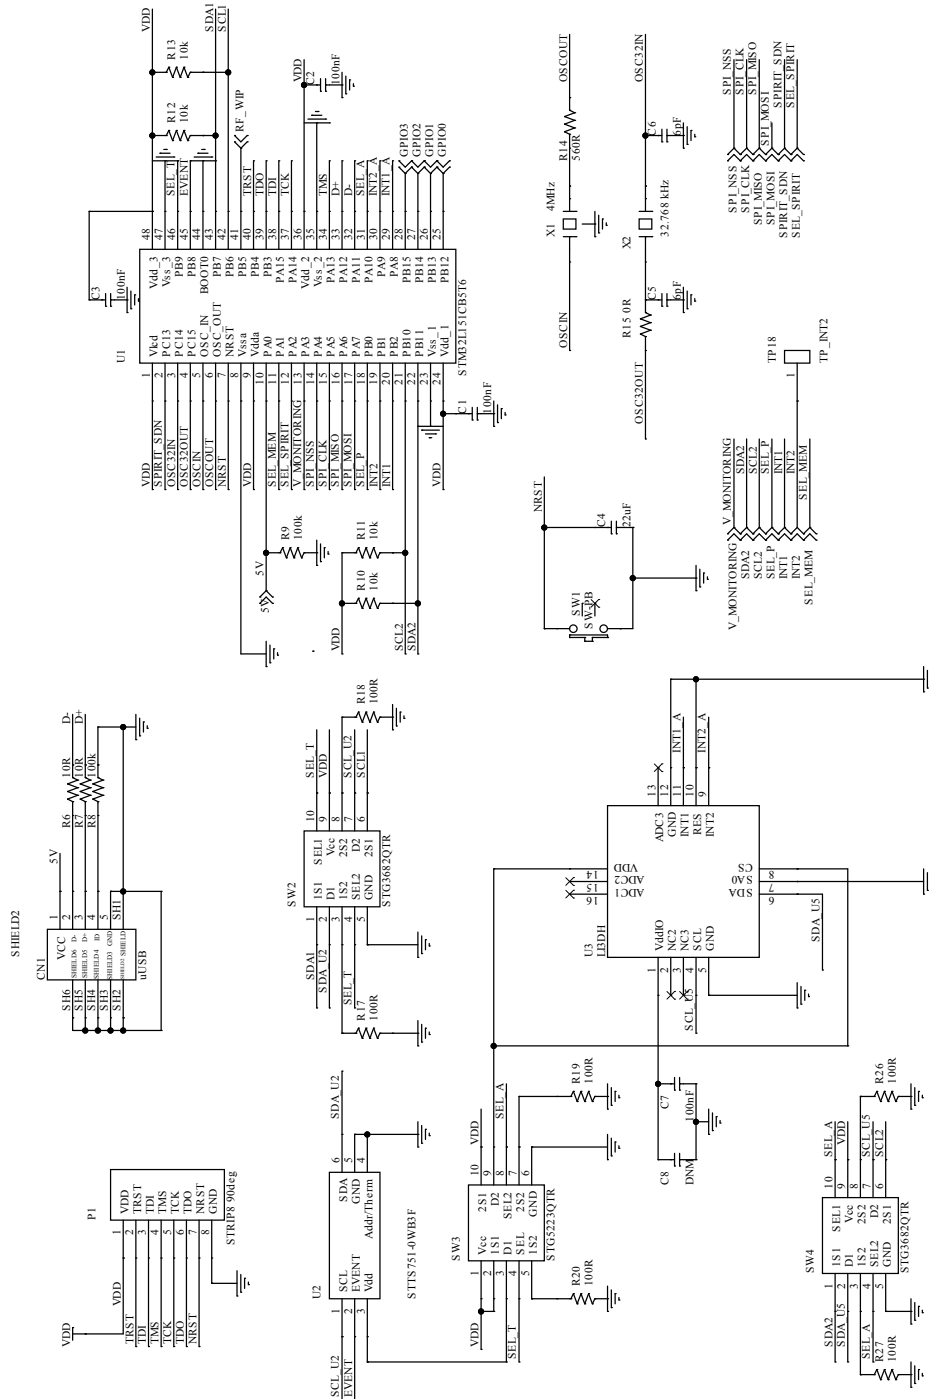


Figure 4. STDES_ERH003V1 - board schematic (4 of 4)

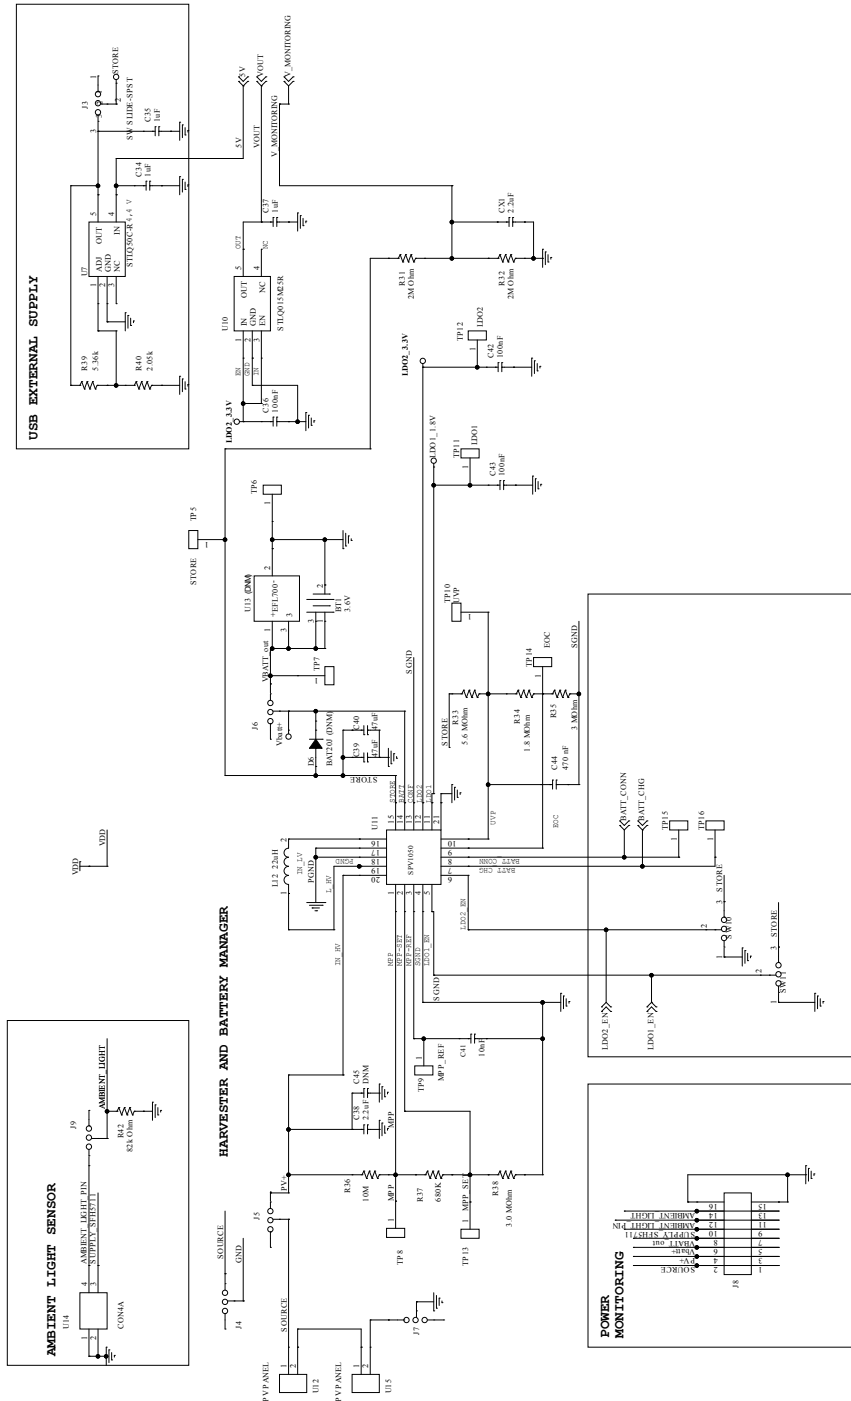

Revision history

Table 2. Document revision history

Date	Version	Changes
08-Oct-2018	1	Initial release.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved