


Water metering based on LCSC using STM32WL33



The picture shown is for illustration purpose only. Actual product may vary depending on buyer's selection and availability.

Features

- Dedicated board for water metering using LCSC
- MB2029B, STEVAL-WL33LCSC, and STEVAL-WL33LCD daughter boards mounted over STEVAL-WL33WMK1
- Two user LEDs for indicating the direction of rotation of the wheel
- Off-board STLINK-V3EC debugger / programmer capability
- Transceiver with integrated RF front-end optimized for the 863–870 MHz frequency band
- Supporting OOK, ASK, 2(G)FSK, 4(G)FSK, and D-BPSK modulations
- Proprietary protocol support, featuring a highly integrated sub-GHz radio and Arm Cortex-M0+ core
- Compatible with standardized wireless protocols wM-Bus
- Low-power autonomous wake-up receiver
- Data delivered with SMA antenna
- RoHS compliant

Description

The water metering [STEVAL-WL33WMKCB](#) board is composed of the MB2029 mother board, where the [STM32WL33CC](#) board is mounted, the [STEVAL-WL33LCSC](#) LC board for water meter flow measurement, and the [STEVAL-WL33LCD](#) LCD board.

It can show the corresponding revolutions with [STEVAL-WL33WMK1](#) over LCD on [STEVAL-WL33LCD](#).

The MCU RF board MB2029 houses the [STM32WL33CC](#) microcontroller, which is an ultralow power device with an embedded sub-GHz transceiver for wireless communication.

It shows the corresponding revolutions with the [STEVAL-WL33WMK1](#) over LCD on [STEVAL-WL33LCD](#).

The [STEVAL-WL33WMK1](#) features two user LEDs that indicate the wheel's rotation in clockwise or anticlockwise directions.

The board can improve water supply management, distribution efficiency, customer service, and billing processes by supporting advanced features such as multitariff billing.


Product summary	
Water metering based on LCSC using STM32WL33	STEVAL-WL33WMKCB
Software for water metering board STEVAL-WL33WMKCB	STSW-WL33WMKCB
Sub-GHz Wireless Microcontrollers. Single-core Arm Cortex-M0+ @64 MHz with 256 Kbytes of Flash memory, 32 Kbytes of SRAM	STM32WL33CCV6TR
STM32 Nucleo-64 RF board with Sub-1 GHz radio subsystem	MB2029B (included in NUCLEO-WL33CC1)
STM32 Nucleo-64 development board with STM32WL33CC MCU	NUCLEO-WL33CC1
Applications	Water metering

1 Detailed description

The STEVAL-WL33WMK1 works with an LCSC board to measure the wheel's revolutions in both clockwise and counterclockwise directions.

The board shows the counts on an LCD display and transmits the data back to the utility for wireless monitoring using the MB2029 RF board.

Figure 1. Functional block diagram

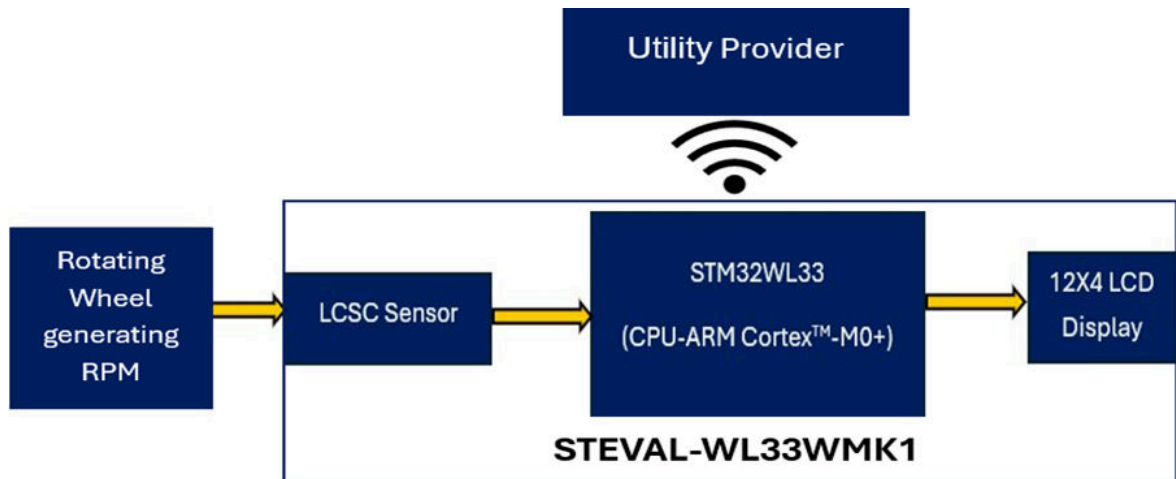

Ultralow power wireless **STM32WL33CC** microcontroller based on the Arm Cortex®-M0+ core, with 256 Kbytes of flash memory and 32 Kbytes of SRAM in a VFQFPN48 package featuring:

- Ultra-low-power MCU (that is) 8 mA TX @ +10 dBm and 4 mA in Rx high-performance mode
- Air data rate from 0.1 to 600 kbps
- Transceiver with integrated RF front-end optimized for the 863–870 MHz frequency band, supporting OOK, ASK, 2(G)FSK, 4(G)FSK, and D-BPSK modulations
- Highly integrated sub-GHz radio and Arm Cortex-M0+ core
- Compatible with standardized wireless protocol WM-Bus
- Low-power autonomous wake-up receiver

The LCSC sensor, which forms an LC network is made up of an inductance (L) and a capacitor (C) connected in parallel, which causes oscillations.

A portion of the magnetic field that the inductor emits is absorbed and energy is lost in the metal target when it is close to the LC sensor. As a result, both the oscillation amplitude and the total number of captured pulses are smaller than in the case of no metal.

To ascertain the wheel's location, LCSC monitors the oscillations' damping time (when it is close to metal).

The microcontroller continuously measures these changes in oscillation amplitude and damping time to accurately count each revolution of the water meter wheel.

It also determines the direction of rotation by analyzing the sequence of signal variations. This data is then processed in real time and displayed on the LCD screen for immediate feedback.

Simultaneously, the processed information is transmitted wirelessly using the wireless M-Bus protocol, enabling secure and reliable communication with utility networks for remote monitoring and management.

The system's low-power consumption ensures long battery life, making it suitable for deployment in locations without easy access to power.

This approach allows utilities to monitor water usage accurately, detect reverse flow or tampering, and improve billing and customer service through reliable and timely data.

2 Schematic diagrams

Notice: These schematics are for illustration purpose only. Actual product may vary depending on buyer's selection and availability.

Figure 2. STEVAL-WL33WMKCB circuit schematic (1 of 6)

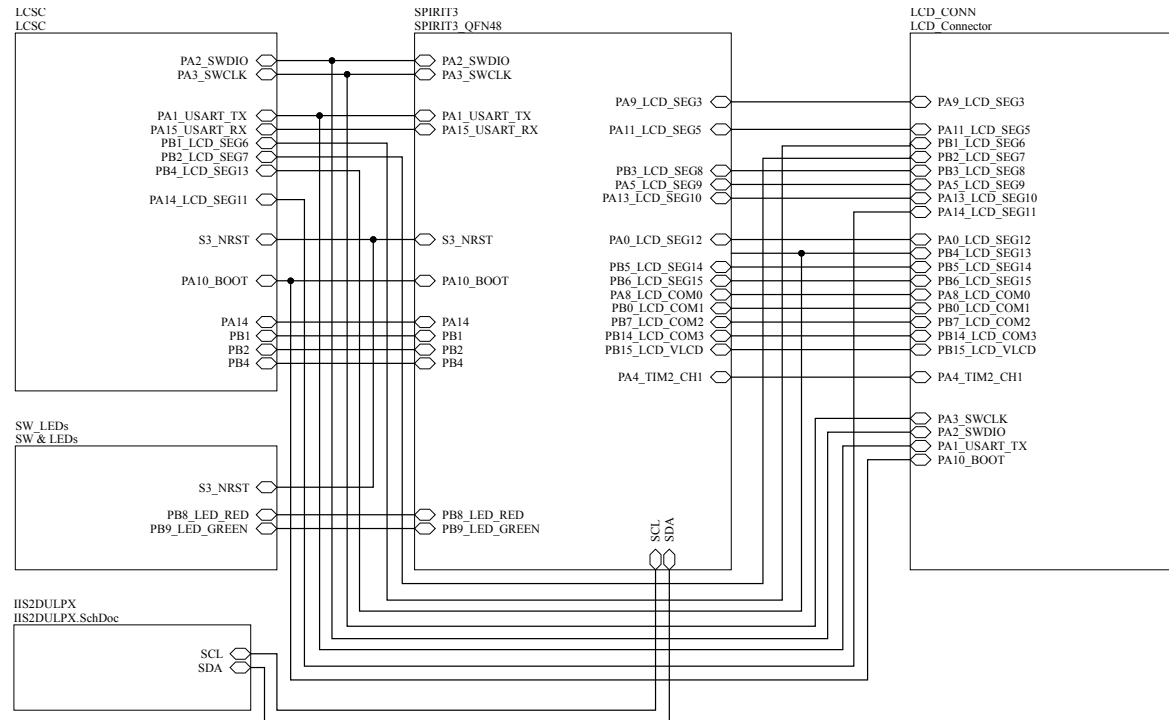


Figure 3. STEVAL-WL33WMKCB circuit schematic (2 of 6)




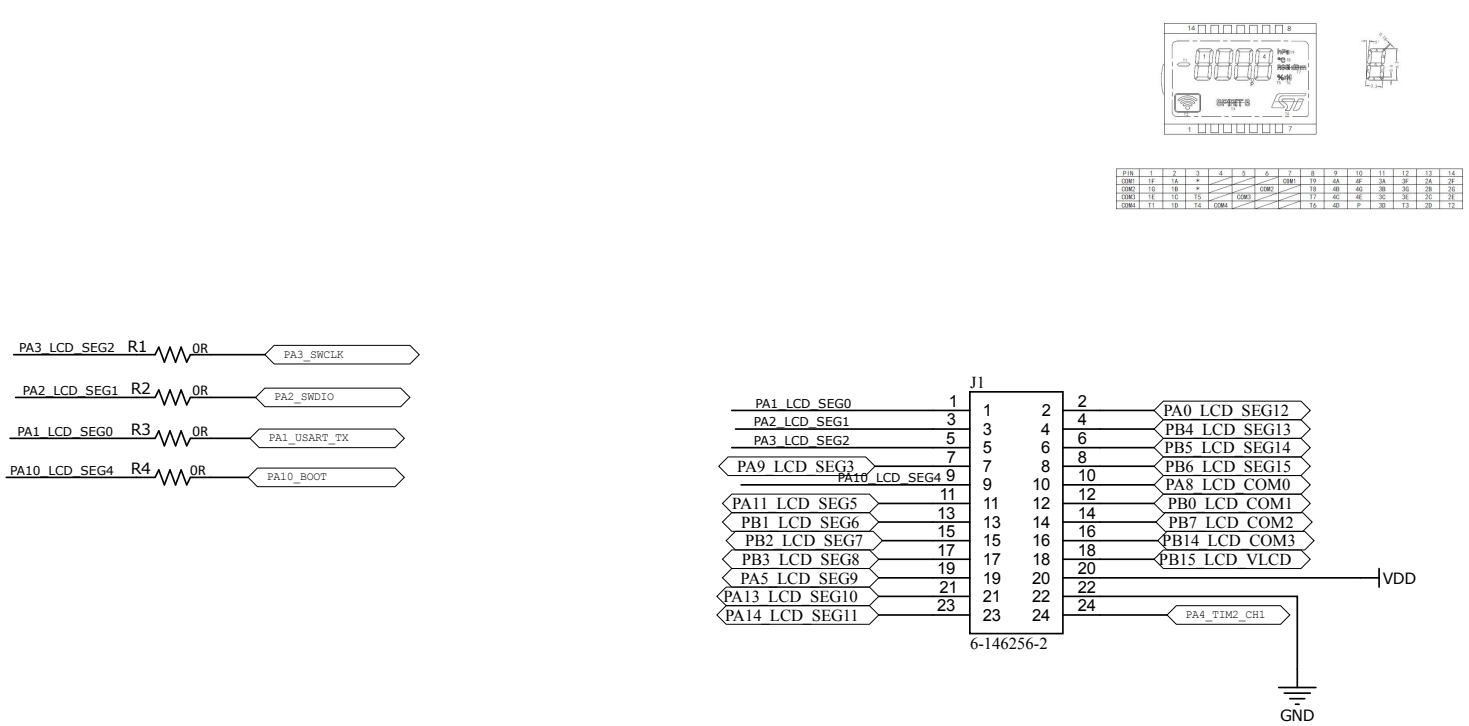


Figure 4. STEVAL-WL33WMKCB circuit schematic (3 of 6)

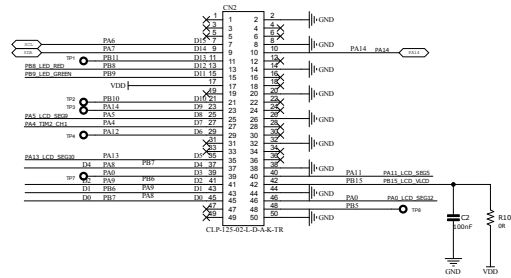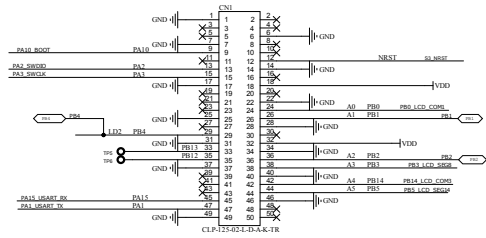

Test points




Figure 5. STEVAL-WL33WMKCB circuit schematic (4 of 6)

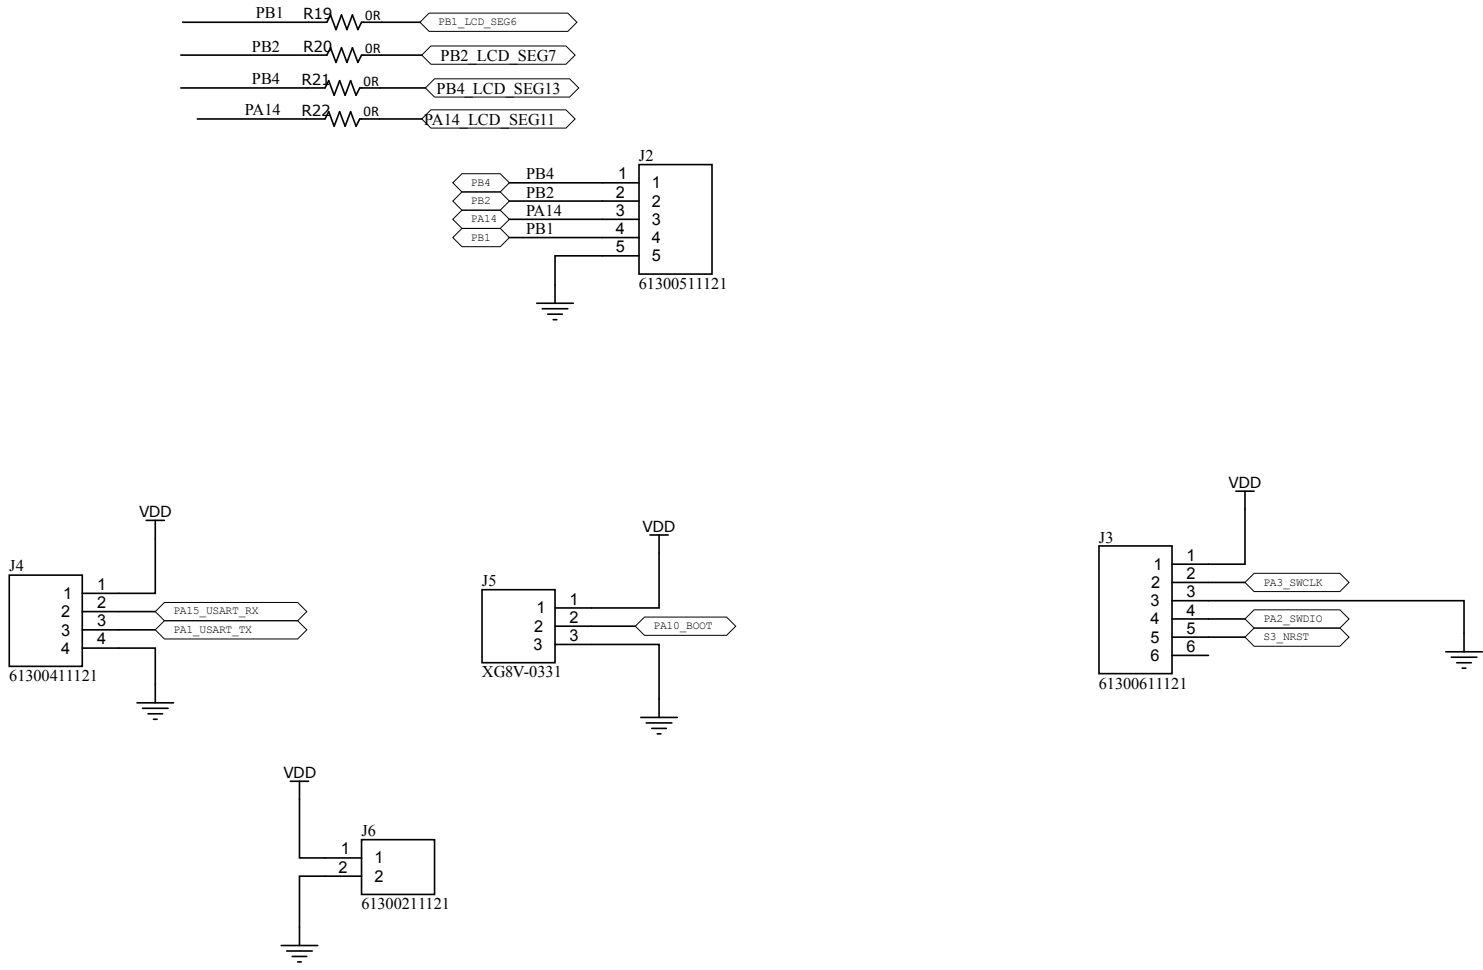


Figure 6. STEVAL-WL33WMKCB circuit schematic (5 of 6)

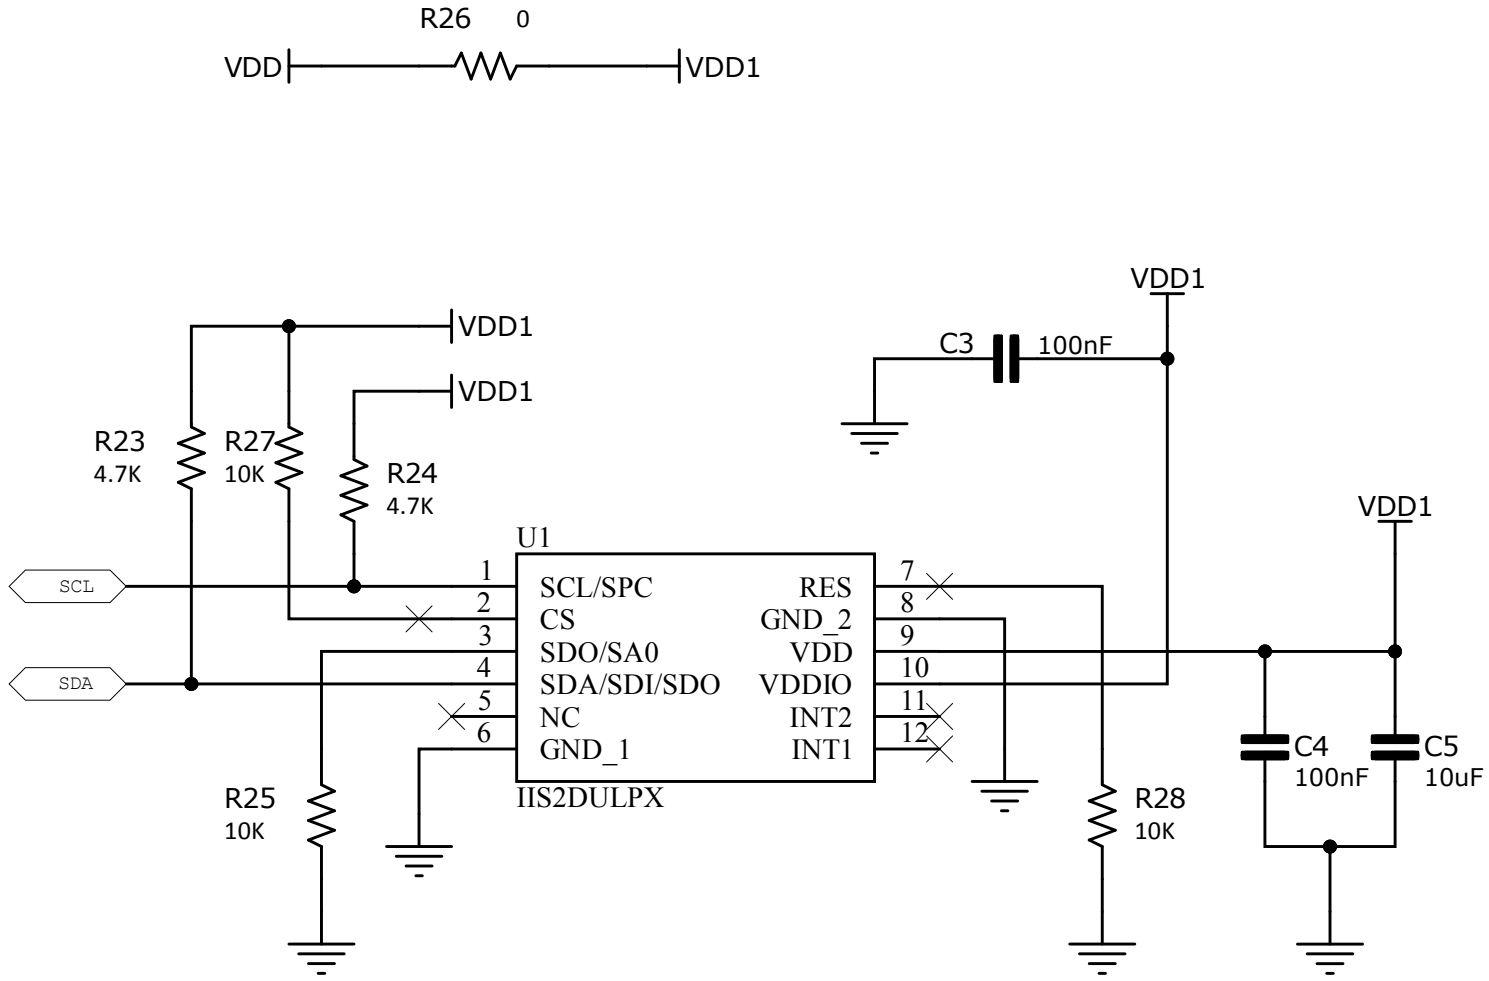


Figure 7. STEVAL-WL33WMKCB circuit schematic (6 of 6)
BUTTONS AND LEDs

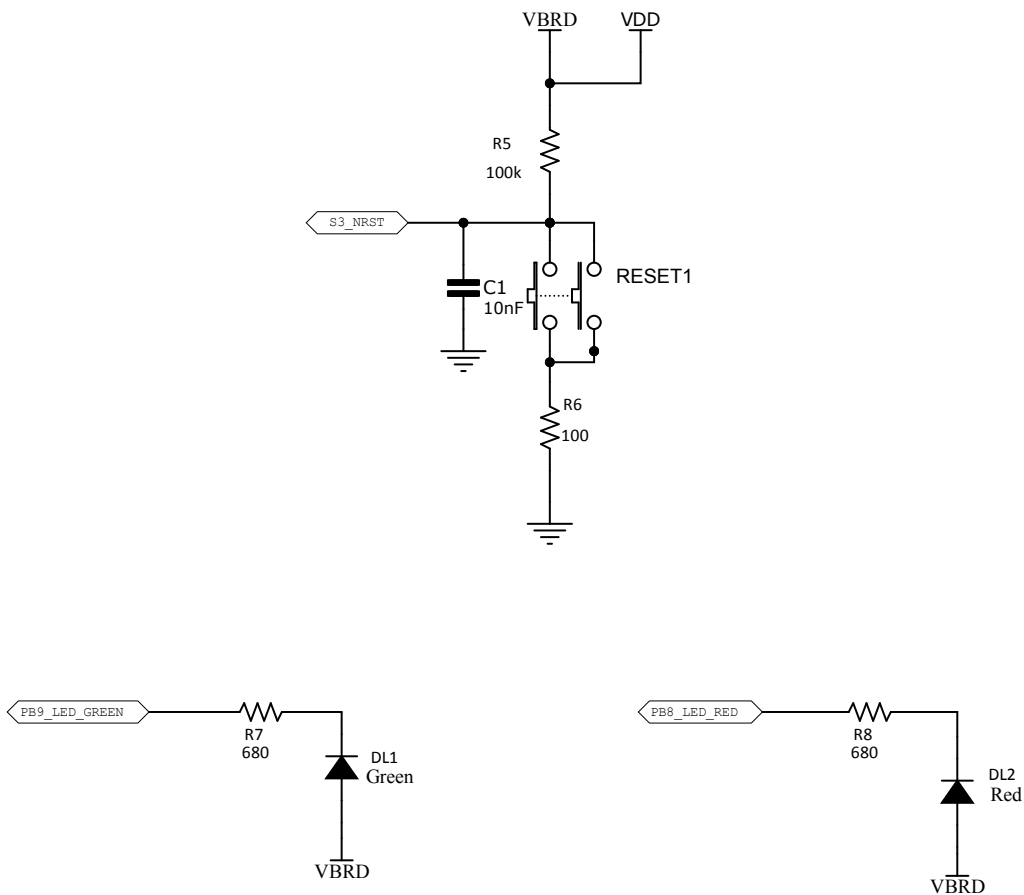


Figure 8. STEVAL-WL33LCD circuit schematic (1 of 1)




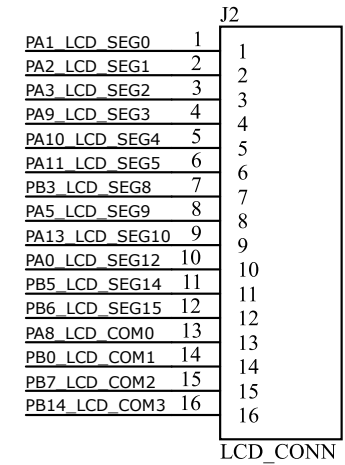


Figure 9. STEVAL-WL33LCSC circuit schematic (1 of 1)

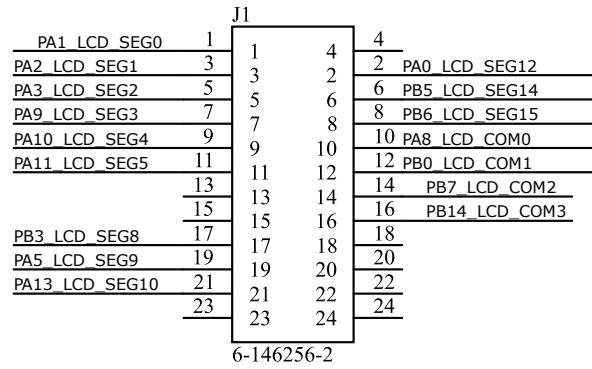

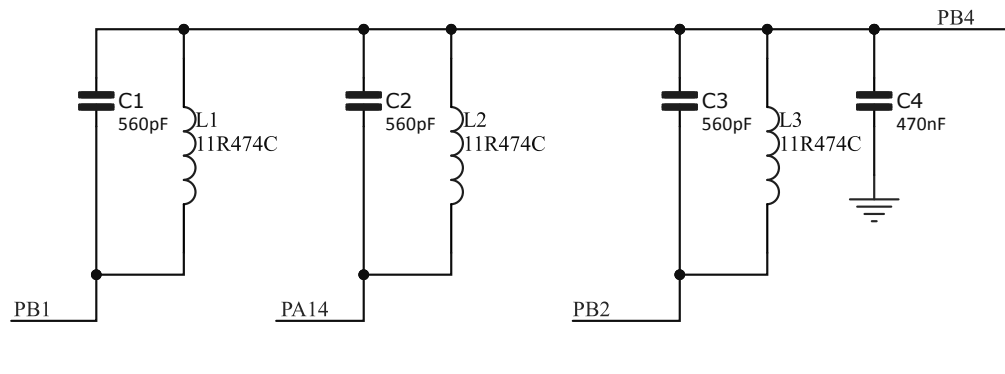

3 Custom evaluation boards information

Notice: These evaluation boards are custom designed and built, in small quantities, according to specific requests from customers and are destined for evaluation and testing of ST products in a research and development setting. Please contact ST to provide your specific requests and get your custom built board(s).

Revision history

Table 1. Document revision history

Date	Revision	Changes
04-Dec-2025	1	Initial release.
06-Mar-2026	2	Updated Features and Section 1: Detailed description . Removed references to LoRa.

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice.

In the event of any conflict between the provisions of this document and the provisions of any contractual arrangement in force between the purchasers and ST, the provisions of such contractual arrangement shall prevail.

The purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

The purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of the purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

If the purchasers identify an ST product that meets their functional and performance requirements but that is not designated for the purchasers’ market segment, the purchasers shall contact ST for more information.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2026 STMicroelectronics – All rights reserved