


STM32Cube function pack for STEVAL-PROTEUS1 evaluation kit for anomaly detection based on artificial intelligence (AI)

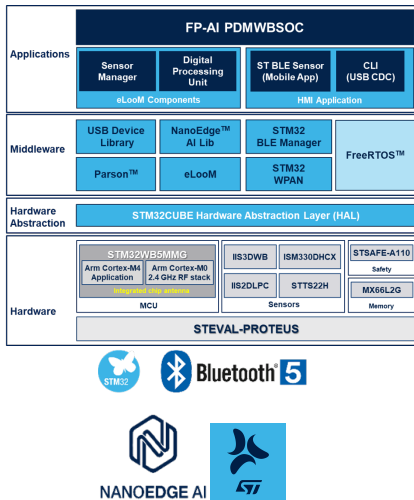

Features

- Firmware to develop a WPAN sensor node for predictive maintenance applications, featuring motion sensors and performing anomaly detection controlled via Bluetooth® Low Energy connectivity
- STM32 wireless personal area network middleware developed within the STM32WB framework used to support Bluetooth® Low Energy 5
- Compatible with [NanoEdgeAIStudio](#) solution to enable AI-based applications
- On-board battery status monitor
- Compatible with [STBLESensor](#) app (Android and iOS) to enable AI library control and monitoring, and firmware update via fast FUOTA
- Based on accelerometer data up to 6 kHz bandwidth
- NanoEdge AI library generated to run in the STM32WB module
- Firmware modular example based on the embedded light object-oriented framework (eLoom) to enable code reusability at application level
- Application for datalogging in binary format
- Utilities: Python and CLI real-time control applications
- Free, user-friendly license terms

Description

FP-AI-PDMWBSOC is an [STM32Cube](#) function pack for the [STEVAL-PROTEUS1](#), able to get motion sensor data, process them for anomaly detection, and send the results to the [STBLESensor](#) mobile app or a PC terminal console.

The function pack helps to explore the implementation and development of a predictive maintenance application that embeds the NanoEdge AI library middleware, capable to provide an AI-based predictive maintenance solution (the NanoEdge AI library is generated using [NanoEdgeAIStudio](#)).

Using the datalogging binary file, the raw data can be extracted from the sensors inside the [STEVAL-PROTEUS1](#) board and provided to the [NanoEdgeAIStudio](#) software to extract a machine learning library for anomaly detection.

This NanoEdge AI library, customized and built on the classified set of data, can be easily updated inside the framework architecture proposed, facilitating the early detection of warning status and potential failure within the equipment.

FP-AI-PDMWBSOC implements two different HMI communication tools at user level: a wired interactive CLI (USB CDC) to configure the node and manage the learning and detecting phases, and the [STBLESensor](#) app with dedicated pages to provide the same functionalities.

To start/stop the learning and detecting phases, an additional control, indicated by LEDs, can be performed by just pressing the user button.

The main software functionalities to handle the NanoEdge library are based on a set of application-level modules (sensor manager, digital processing units), useful to reuse and easily extendable to build other customized applications.

Product summary	
STM32Cube function pack for STEVAL-PROTEUS1 evaluation kit for Anomalydetection based on Artificial Intelligence (AI)	FP-AI-PDMWBSOC
Industrial sensor evaluation kit for condition monitoring based on the 2.4 GHz STM32WB5MMG module	STEVAL-PROTEUS1
BLE sensor application for Android and iOS	STBLESensor
Automated Machine Learning (ML) tool for STM32 developers	NanoEdgeAIStudio
Applications	Condition Monitoring/ Predictive Maintenance IoT for Smart Industry

1 Detailed description

1.1 What can you do with STM32Cube function packs?

STM32Cube function packs leverage the modularity and interoperability of STM32 Nucleo and X-NUCLEO boards together with STM32Cube and X-CUBE software to create function examples for some of the most common use cases of different application technologies.

These software function packs are designed to exploit the underlying STM32 ODE hardware and software components as much as possible to best satisfy the requirements of final user applications.

Moreover, function packs may include additional libraries and frameworks that are not present in the original X-CUBE packages, thus enabling new functionalities allowing real and usable system for developers.

1.2 What is STM32Cube?

STM32Cube is a combination of a full set of PC software tools and embedded software blocks running on STM32 microcontrollers and microprocessors:

- [STM32CubeMX](#) configuration tool for any STM32 device; it generates initialization C code for Cortex-M cores and the Linux device tree source for Cortex-A cores
- [STM32CubeIDE](#) integrated development environment based on open-source solutions like Eclipse or the GNU C/C++ toolchain, including compilation reporting features and advanced debug features
- [STM32CubeProgrammer](#) programming tool that provides an easy-to-use and efficient environment for reading, writing and verifying devices and external memories via a wide variety of available communication media (JTAG, SWD, UART, USB DFU, I2C, SPI, CAN, etc.)
- STM32CubeMonitor family of tools ([STM32CubeMonRF](#), [STM32CubeMonUCPD](#), [STM32CubeMonPwr](#)) to help developers customize their applications in real-time
- [STM32Cube MCU and MPU packages](#) specific to each STM32 series with drivers (HAL, low-layer, etc.), middleware, and lots of example code used in a wide variety of real-world use cases
- [STM32Cube expansion packages](#) for application-oriented solutions.

1.3 How does this function pack complement STM32Cube?

This software is based on the STM32CubeHAL. It extends [STM32Cube](#) by providing support for the [STEVAl-PROTEUS1](#) evaluation kit to develop specific industrial predictive maintenance applications for early detection of warning signs of potential failure.

The package is mainly based on the following mandatory key elements:

- The FreeRTOS™ operating system as third-party middleware for real-time execution
- The eLoOM middleware to implement the object-oriented methodology for data management and processing with the AI library, easy to use at application level, which integrates two reusable software modules:
 - The sensor manager module retrieves sensor data and sets the sensor parameters. It is implemented as an acquisition engine that:
 - Controls multiple task accesses to the sensor bus
 - Defines interfaces to avoid implementation dependencies
 - Dispatches events to notify when a certain amount of data is available
 - The DPU module provides a set of processing blocks, which can be chained together, to handle all the sensor data set before the AI library processing. Available processing modules include:
 - Circular buffering
 - Anomaly detection (AD)

Further details are available in the "Documentation" folder of the function pack and in the "Doc" folder of each firmware module.

Revision history

Table 1. Document revision history

Date	Revision	Changes
19-Jul-2022	1	Initial release.

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2022 STMicroelectronics – All rights reserved