


## SPC58XXADPT100S microcontroller premium evaluation board for SPC58xGxxE3, SPC58xCxxE3, SPC584BxxE3 and SPC582BxxE3

Data brief

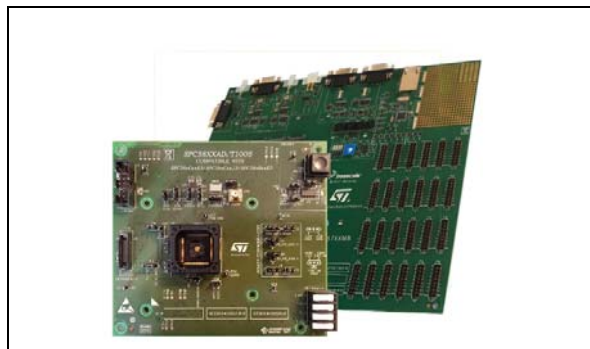

### Features

#### SPC57XXMB:

- SPC58x modular evaluation system
- Single 12 V external power supply
- Four on-board regulators:
  - 5.0 V, 3.3 V and 1.25 V switching regulators
  - 5 V linear regulator for the ADC supplies and references
- Master power switch and regulator status LEDs
- Two 240-way high-density expansion connectors for MCU daughter cards
- All MCU signals readily accessible at a port-ordered group of 0.1" pitch headers
- RS232/SCI physical interface and standard DB9 female connector
- Two FlexRAY channels interface with a DB9 connector (for both transceivers) and two alternative connectors
- LINFlexD interface with two different style connectors
- Two high speed CAN channels and two female standard DB9 connectors
- Ethernet interface with a standard RJ45 Ethernet connector

- One potentiometer for analog voltage input and four user switches and 4 user LEDs, freely connectable

#### SPC58XXADPT100S:

- Open top MCU socket
- Flexible MCU clocking options
- 40 MHz crystal EVB clock circuit
- 8 MHz EVB clock oscillator circuit
- external clock via SMA connector
- User reset switch with reset status LEDs
- 14-pin standard JTAG connector
- 34-pin SAMTEC connector for Nexus interface
- Minimodule dimension: 127 mm X 114.3 mm
- Max Top components height 19.4mm
- PCB thickness 1.6mm
- Max Bottom components height 3.5mm

### Description

The SPC58XXADPT100S Premium Evaluation Boards System supports the 32-bit SPC58xGxxE3, SPC58xCxxE3, SPC584BxxE3 and SPC582BxxE3 STMicroelectronics' automotive microcontrollers.

The complete system consists of an SPC57XXMB motherboard and an SPC58XXADPT100S daughter card which plugs into the motherboard. Different daughter cards are available for evaluating the whole family of devices in all supported packages. All daughter cards are similar in design and concept.

The evaluation system (motherboard and daughter card) allows full access to the CPU, all of the CPU's I/O signals, and the motherboard peripherals (such as CAN, SCI, LIN and FlexRAY). The daughter card itself can be used as a standalone unit when access to the I/O pins or peripherals is not needed.

# 1 Order codes

**Table 1. Device summary**

Order code	Reference
SPC57XXMB	Motherboard for SPC57x/SPC58x family devices
SPC58XXADPT100S	Socketed mini module for SPC58 B/C/E/G lines in eQFP100 package. Requires SPC57XXMB

## 2 Revision history

Table 2. Document revision history

Date	Revision	Changes
02-Nov-2017	1	Initial release.

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved