

Data brief

Compact reference design for low voltage brushless power tools based on STSPIN32F0B



Features

- 7 45 V motor voltage rating supported
- Recommended for power tools supplied from 2S to 6S batteries
- Output current up to 15 A_{rms}
- STSPIN32F0B advanced 3-phase motor controller tailored for single-shunt applications
- STL180N6F7 60 V, 1.9 mΩ N-channel power MOSFET
- Ultra-low standby current below 1µA thanks to an external turn-on/off trigger
- · Heat sink for improved power dissipation
- Extremely compact footprint (70 mm x 30 mm)
- Input connector for Hall effect sensors and encoder
- Plug-and-play capability through 6-step firmware with Hall effect sensor feedback
- Speed regulation through an external trimmer
- Protections: thermal shutdown, UVLO, overcurrent and reverse biasing of power stage outputs
- SWD debug interface and direct firmware update (DFU) via UART

Description

This STEVAL-PTOOL1V1 compact 70 mm x 30 mm reference design board is tailored for low voltage power tools driven by 3-phase brushless motors, supplied by 2S to 6S batteries. The design is based on the STSPIN32F0B controller and STL180N6F7 (or STL220N6F7) power MOSFET.

The board is ready, and can be configured for 6-step sensorless with few hardware modifications.

The board can deliver up to 15 A continuous current, thanks also to the optimal thermal dissipation provided by an embedded heatsink. It embeds a fast power-on circuit that connects and disconnects the battery, allowing standby consumption below 1 μA for extended battery duration. Several protection features are included, such as thermal shutdown, undervoltage lockout, overcurrent protection with programmable threshold and reverse biasing of power stage outputs.

The firmware examples included in X-CUBE-MCPKG001 are based on STM32 Motor Control SDK (X-CUBE-MCSDK) enabling all the features of the board, included the low quiescent standby mode.


This reference design is predominately intended for power tools, but is very suitable for any battery-powered application involving similar architecture, rating and performance. A potentiometer input for speed variation is available.

Product summary		
Reference design based on STSPIN32F0B for power tools driven by LV BLDC motors	STEVAL- PTOOL1V1	
STM32 Motor Control Software Development Kit	X-CUBE-MCSDK	
N-channel 60 V STripFET F7 Power MOSFET	STL180N6F7	
Advanced single shunt BLDC controller with embedded STM32 MCU	STSPIN32F0B	
N-channel 60 V STripFET F7 Power MOSFET	STL220N6F7	
	Home and Professional Appliances	
Applications	Industrial Motor Control	
	Industrial Tools	

1 Schematic diagrams



Figure 1. STEVAL-PTOOL1V1 schematic diagram

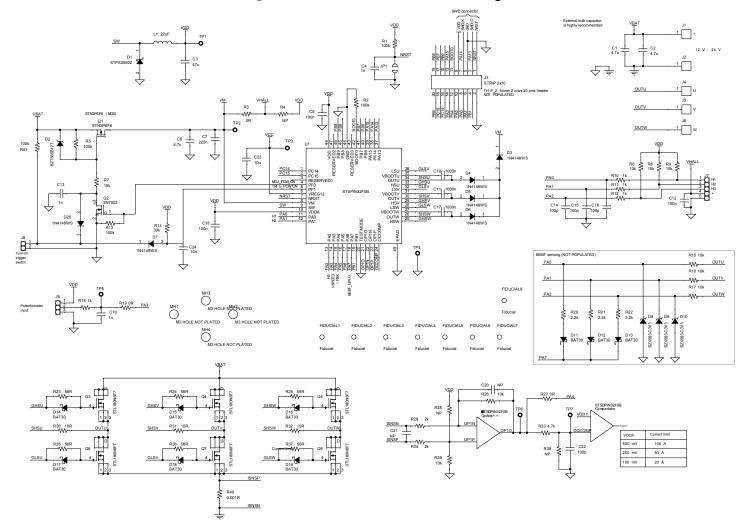



Revision history

Table 1. Document revision history

Date	Version	Changes
22-Sep-2020	1	Initial release.
11-Jan-2021	2	Updated cover page, product summary table and Section 1 Schematic diagrams.
03-Aug-2021	3	Updated cover page, product summary table and description. Added X-CUBE-MCSDK-Y compatibility information.
11-Nov-2021	4	Updated Schematic diagrams.
23-Jan-2024	5	Updated Product summary, Features and Description.

DB4293 - Rev 5 page 3/4



IMPORTANT NOTICE - READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 STMicroelectronics – All rights reserved

DB4293 - Rev 5 page 4/4