



### Demonstration board user guidelines for the TS2007FC 3 W filter-free class D audio amplifier with 6-12 dB fixed gain select

#### Introduction

This application note concerns the TS2007FC demonstration board, designed to evaluate the class D audio differential amplifier TS2007FC.

This document provides:

- a brief description of the TS2007FC device.
- a description of the demonstration board and all of its components.
- the layout of the demonstration board.

#### About the TS2007FC

The TS2007FC is an audio power class D amplifier that can drive up to 1.4 W into an 8  $\Omega$  load at 5 V. It achieves better efficiency compared to a typical class AB audio power amplifier.

This device allows switching between two different gains: 6 or 12 dB via a logic signal on the GS pin. Pop and click reduction circuitry provides low on/off switch noise while allowing the device to start within 1 ms. A standby function (active low) reduces the current consumption to 1  $\mu$ A typical. The TS2007FC also integrates an output short-circuit protection mechanism and thermal shutdown protection to avoid damage to the amplifier.

#### Key features of the TS2007FC

- Operating range from  $V_{CC} = 2.4$  to 5.5 V.
- Standby mode active low.
- Output power: 1.4 W at 5 V or 0.5 W at 3.0 V into 8  $\Omega$  with 1% THD+N maximum.
- Output power: 2.3 W at 5 V or 0.75 W at 3.0 V into 4  $\Omega$  with 1% THD+N maximum.
- Two fixed gain selects: 6 or 12 dB.
- Low current consumption.
- Efficiency: 88% typical.
- Signal-to-noise ratio: 90 dB typical.
- PSRR: 68 dB typical at 217 Hz with 6 dB gain.
- PWM base frequency: 280 kHz
- Low pop and click noise.
- Thermal shutdown protection.
- Output short-circuit protection.
- Flip-chip lead-free 9-bump package.

Refer to the datasheet for complete information on the TS2007FC.

# 1 Description of the evaluation board

The TS2007FC demonstration board is designed for the TS2007FC class D audio differential amplifier. The TS2007FC device, in a flip-chip package, is mounted on a two-layer PCB. Easily-accessible connectors on the board allow changing or driving the gain select and standby control pins, as well as changing the input configuration of the TS2007FC.

The TS2007FC's gain can be set to either 6 or 12 dB via the P1 connector (see [Table 1](#)).

The **input configuration** is either capacitor-coupled or common-mode feedback. On the evaluation board, the JP3 and JP4 connectors allow you to change the input configuration.





In the **capacitor-coupled configuration**, the -3 dB cut-off frequency in Hz is:

$$\frac{1}{2\pi \cdot Z_{in} \cdot C_1} = \frac{1}{2\pi \cdot Z_{in} \cdot C_2}$$

with  $Z_{in}$  in  $\Omega$  ( $Z_{in} = 75 \text{ k}\Omega$  typically), C in Farads and  $C_1 = C_2$ .

More information about component calculations is available in the TS2007FC datasheet.

**Table 1. Evaluation board connectors**

Connector(s)	Description
JP1	Input signal connector (GND, In+, In-, GND).
JP1	Output signal connector (GND, Out-, Out+, GND).
JP3, JP4	Input configuration: <ul style="list-style-type: none"> <li>– capacitor-coupled when JP3 and JP4 are open.</li> <li>– common-mode feedback when JP3 and JP4 are shorted by jumpers.</li> </ul>
P1	Gain select control connector: <ul style="list-style-type: none"> <li>–  pins 1 and 2 are shorted or pin 2 is floating, the gain is 6 dB.</li> <li>–  pins 2 and 3 are shorted, the gain is 12 dB.</li> </ul> The connector pins are connected as follows: <ul style="list-style-type: none"> <li>– 1 to <math>V_{CC}</math></li> <li>– 2 to GS of the TS2007FC</li> <li>– 3 to GND</li> </ul>
P2	Standby control connector: <ul style="list-style-type: none"> <li>–  pins 1 and 2 are shorted, the TS2007FC is in operation mode.</li> <li>–  pins 2 and 3 are shorted, the TS2007FC is in standby mode.</li> </ul> The connector pins are connected as follows: <ul style="list-style-type: none"> <li>– 1 to <math>V_{CC}</math></li> <li>– 2 to STANDBY of the TS2007FC</li> <li>– 3 to GND</li> </ul>
JP5	Power connector ( $V_{CC}$ and GND). Power supply voltage from 2.4 to 5.5 V.

**Caution:** When you apply the power supply through JP5, **do not** invert the polarity since this will irreversibly damage the U1 amplifier.

Figure 1. Schematic diagram

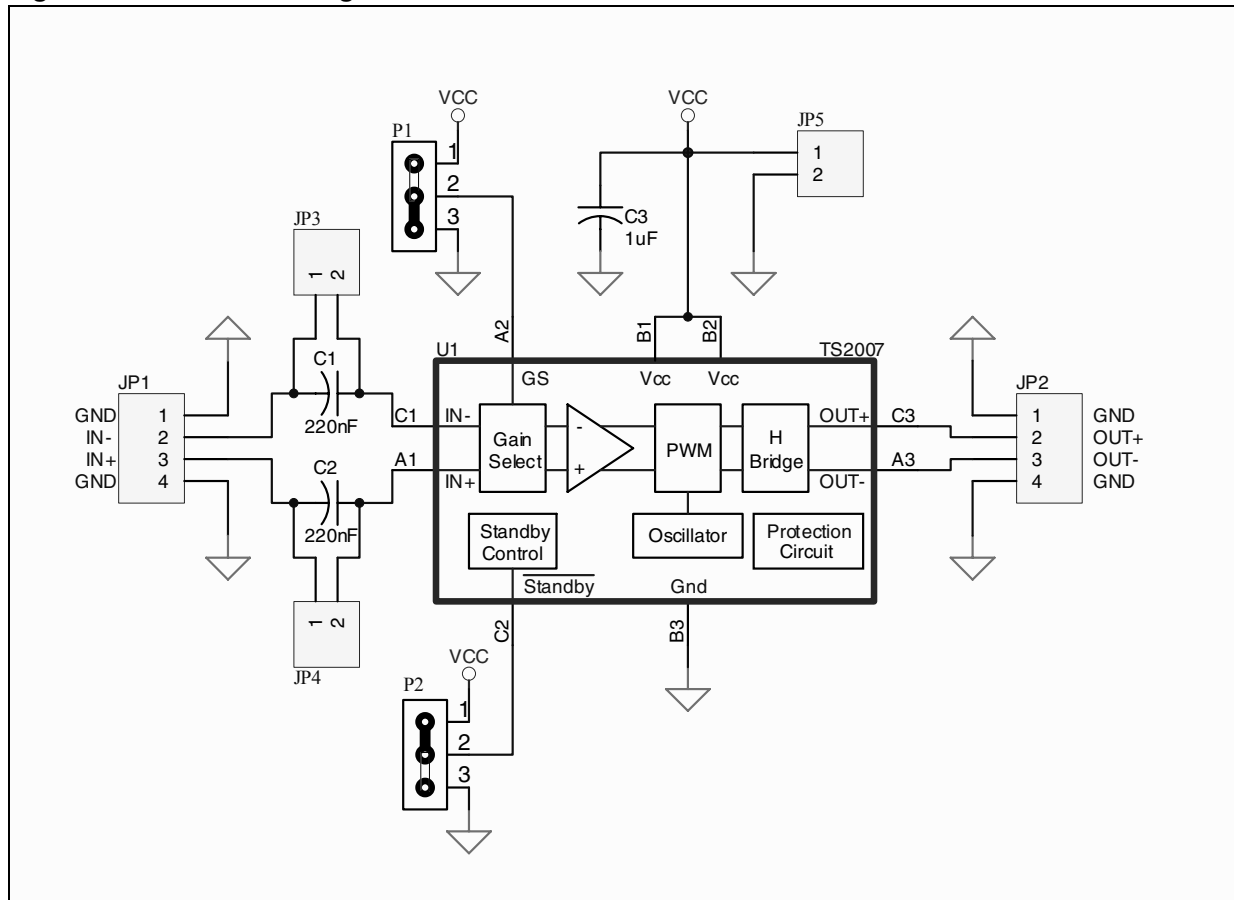


Table 2. Component list for the demonstration board

Designation	Quantity	Description
C1, C2	2	220 nF/16 V, SMD ceramic capacitors, 0603
C3	1	1 µF/16 V, SMD ceramic capacitor, 0603
JP1, JP2	2	4-pin header 2.54 mm pitch
JP3, JP4, JP5	3	2-pin header 2.54 mm pitch
P1, P2	2	3-pin header 2.54 mm pitch
U1	1	TS2007EIJT

## 2 Demonstration board layout

The following figures depict the top view and layers of the demonstration board.

Figure 2. PCB top layer

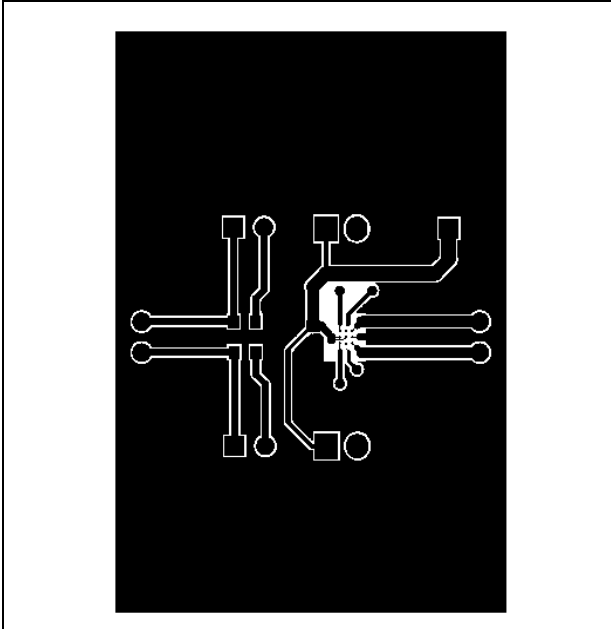


Figure 3. PCB bottom layer


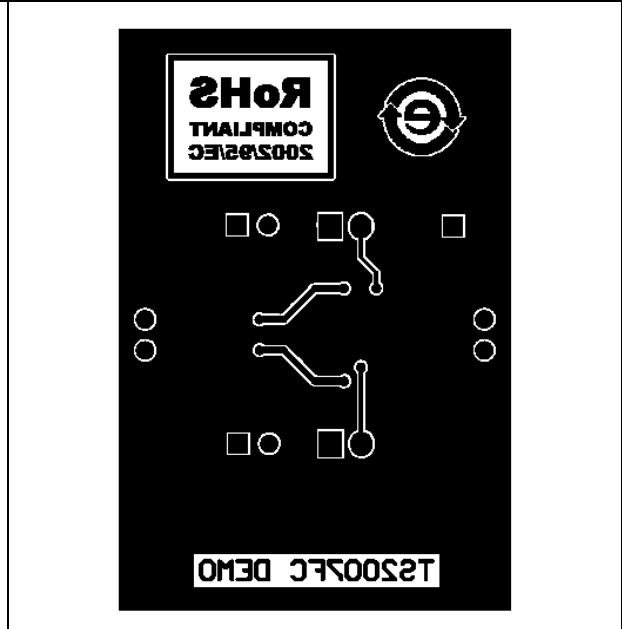


Figure 4. Top view and dimensions of the demonstration board

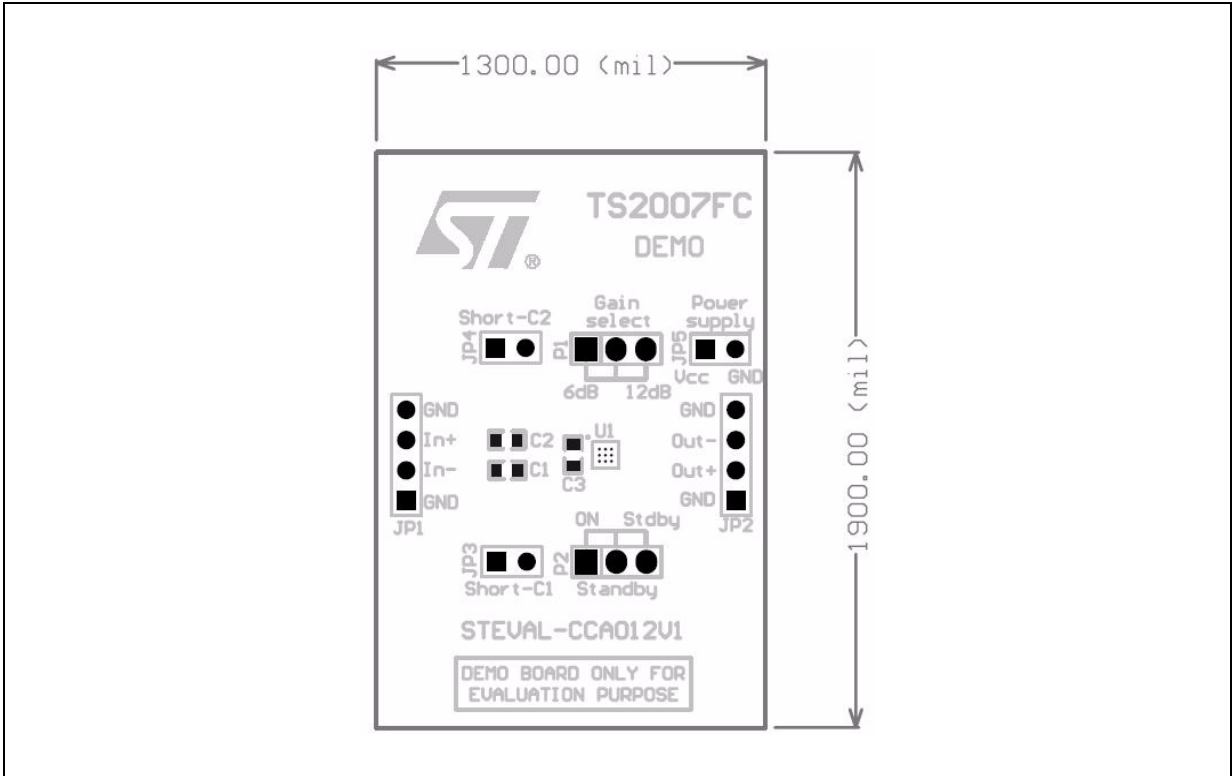

### 3 Conclusion

To order the board online go to [http://www.st.com/stonline/domains/buy/buy\\_dev.htm](http://www.st.com/stonline/domains/buy/buy_dev.htm), and use the order code *STEVAL-CCA012V1*.

## 4 Revision history

**Table 3. Document revision history**

Date	Revision	Changes
06-Feb-2009	1	Initial release.

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)