


Ultra-low clamping single line bidirectional ESD protection in extra-small 01005 package



ST01005 package

Features

- Ultra-low clamping voltage: +/-7 V IEC 61000-4-2 8 kV contact discharge at 30 ns
- Bidirectional device
- Low leakage current
- 01005 package
- **ECOPACK2** compliant component
- ESD / transient protection according to:
 - IEC61000-4-2 (ESD): 15 kV / 25 kV contact / air discharge
 - IEC61000-4-4 (EFT): 40 A
 - IEC61000-4-5 (surge): 5 A

Applications

- Where transient overvoltage protection in ESD sensitive equipment is required, such as:
 - Smartphones, mobile phone and accessories
 - Tablet and notebooks
 - Portable multimedia devices and accessories
 - Wearable, home automation, healthcare
 - Highly integrated systems

Description

Bidirectional single line TVS diode designed to protect the data lines or other I/O ports against ESD transients.


The **ESDZV5-1BV2** is the smallest and most efficient 15 kV ESD protection, ideal for applications where both reduced line capacitance, board space saving and high ESD protection levels are required.

Product status
ESDZV5-1BV2

1 Characteristics

Table 1. Absolute maximum ratings

Symbol	Parameter		Value	Unit
V_{PP}	Peak pulse voltage	IEC 61000-4-2: Contact discharge	15	kV
		Air discharge	25	
I_{PP}	Peak pulse current	8/20 μ s	5	A
P_{PP}	Peak pulse power		45	W
T_{stg}	Storage junction temperature range		-65 to +150	°C
T_j	Maximum operating junction temperature		-40 to +150	
T_L	Maximum temperature for soldering during 10 s		260	°C

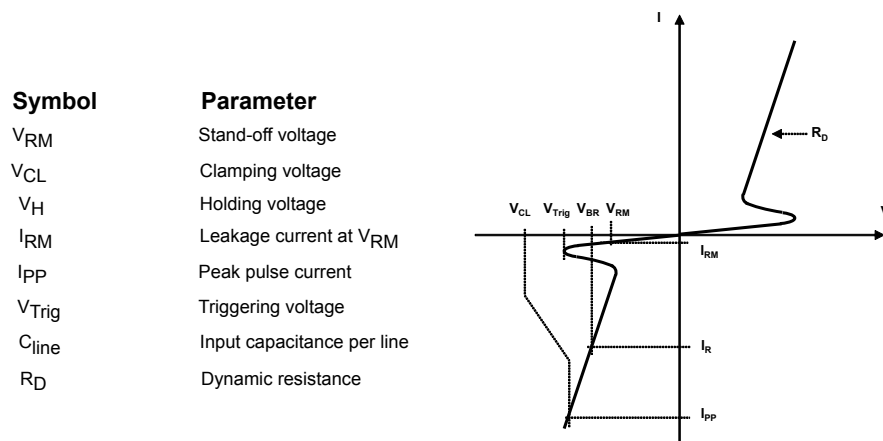Figure 1. Electrical characteristics (definitions)

Table 2. Electrical characteristics ($T_{amb} = 25\text{ °C}$)

Symbol	Test conditions	Min.	Typ.	Max.	Unit
V_{Trig}	Higher voltage than V_{TRIG} guarantees the protection turn-on	5.8		8.5	V
I_{RM}	$V_{RM} = 5.5\text{ V}^{(1)}$			100	nA
R_D	Pulse duration 100 ns		0.18		Ω
V_{CL}	8 kV contact discharge after 30 ns, IEC 61000-4-2		7		V
C_{line}	$F = 1\text{ MHz}$, $V_{OSC} = 30\text{ mV}$		5	6	pF
V_H	Lower voltage than V_H guarantees the protection turn-off	4	4.3	4.8	V

1. Application note: When used to protect a line connected to a DC source, the DC voltage must be lower than the minimum V_H to enable the diode to return to its non-conducting state after the transient.

1.1 Characteristics (curves)

Figure 2. Leakage current versus junction temperature (typical values)

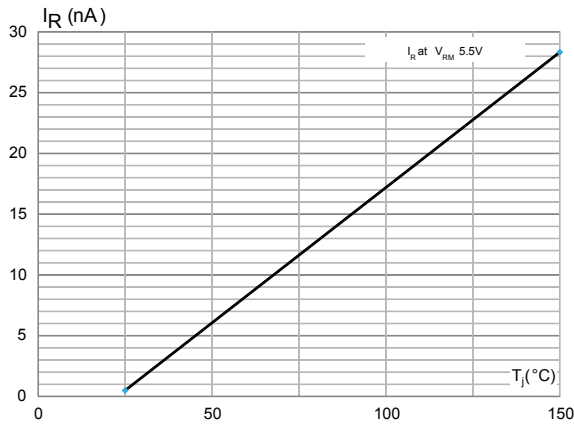


Figure 3. Junction capacitance versus applied voltage (typical values)

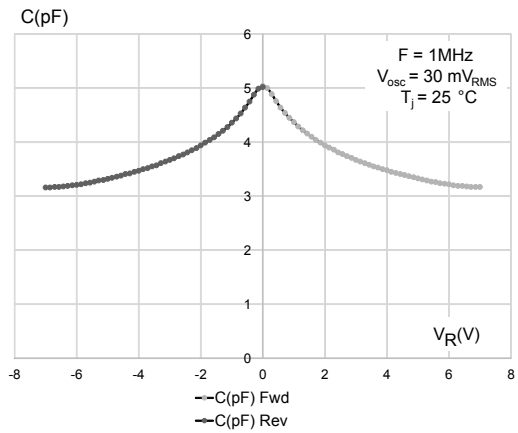


Figure 4. ESD response to IEC 61000-4-2 (+8 kV contact discharge)

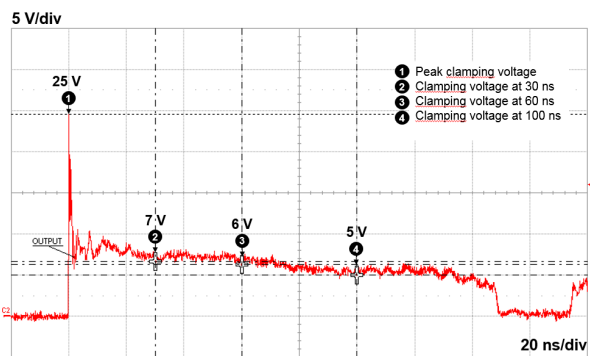


Figure 5. ESD response to IEC 61000-4-2 (-8 kV contact discharge)

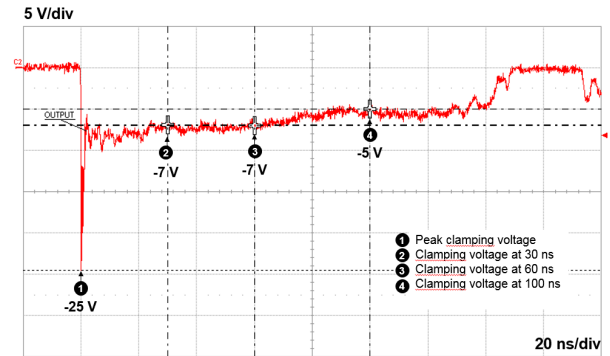


Figure 6. TLP characteristic


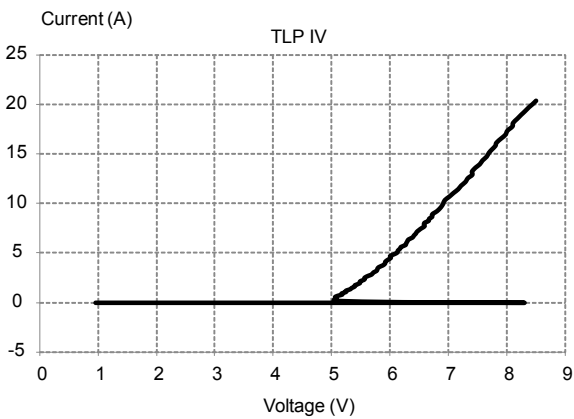


Figure 7. S21 attenuation measurement result

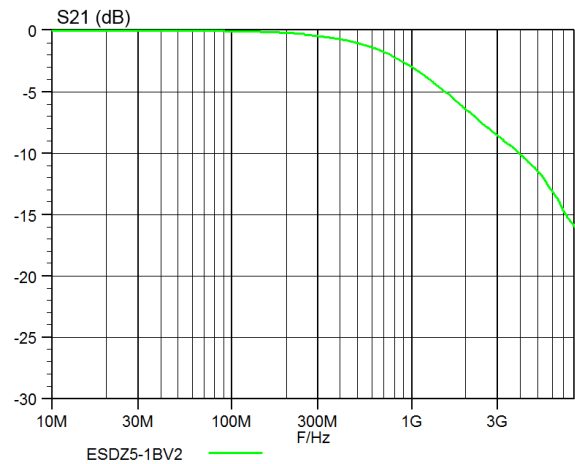

2 Package information

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 ST01005 package information

Figure 8. ST01005 package outline

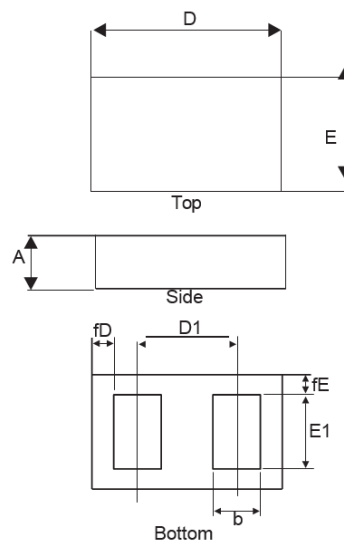


Table 3. ST01005 package mechanical data

Ref.	Dimensions		
	Millimeters		
	Min.	Typ.	Max.
A	0.135	0.150	0.165
b		0.130	
D	0.450	0.465	0.480
D1		0.280	
E	0.240	0.255	0.270
E1		0.200	
fD		0.0225	
fE		0.0225	

Figure 9. Marking layout


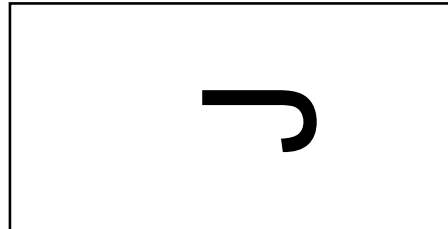



Figure 10. Tape and reel mechanical data

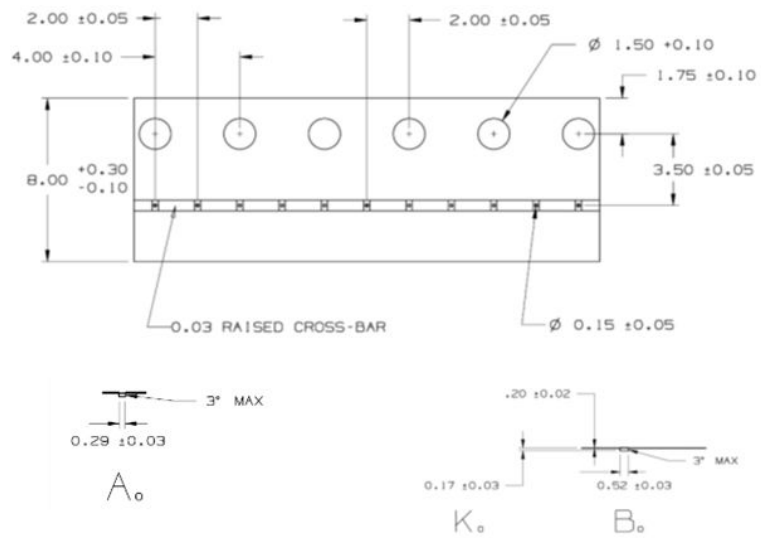

3 Recommendation on PCB assembly

3.1 Footprint

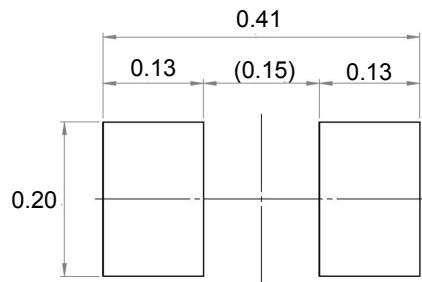Figure 11. Footprint in mm




1. SMD footprint design is recommended

3.2 Stencil opening design

1. Recommended design reference
 - a. Stencil opening thickness: 75 μm .
 - b. Stencil aperture ratio: 100%

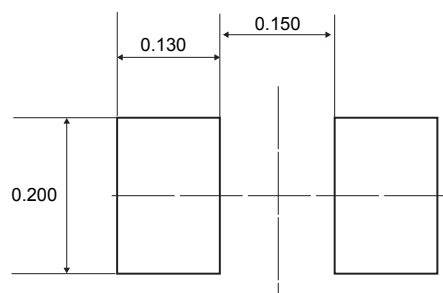Figure 12. Stencil opening dimensions



3.3 Solder paste

1. Halide-free flux qualification ROL0 according to ANSI/J-STD-004.
2. "No clean" solder paste is recommended.
3. Offers a high tack force to resist component movement during high speed.
4. Use solder paste with fine particles: Type 4 (powder particle size 20-38 μm per IPCJ STD-005).

3.4 Placement


1. Manual positioning is not recommended.
2. It is recommended to use the lead recognition capabilities of the placement system, not the outline centering
3. Standard tolerance of ± 0.05 mm is recommended.
4. 1.0 N placement force is recommended. Too much placement force can lead to squeezed out solder paste and cause solder joints to short. Too low placement force can lead to insufficient contact between package and solder paste that could cause open solder joints or badly centered packages.
5. To improve the package placement accuracy, a bottom side optical control should be performed with a high resolution tool.
6. For assembly, a perfect supporting of the PCB (all the more on flexible PCB) is recommended during solder paste printing, pick and place and reflow soldering by using optimized tools.

3.5 PCB design preference

1. To control the solder paste amount, the closed via is recommended instead of open vias.
2. The position of tracks and open vias in the solder area should be well balanced. A symmetrical layout is recommended, to avoid any tilt phenomena caused by asymmetrical solder paste due to solder flow away.

3.6 Reflow profile

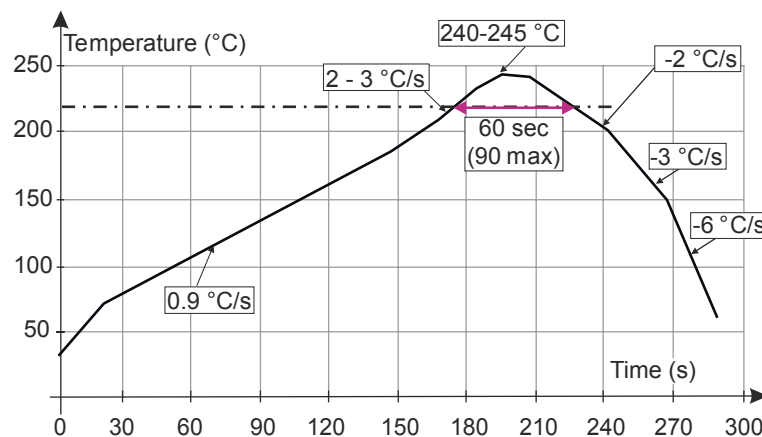Figure 13. ST ECOPACK® recommended soldering reflow profile for PCB mounting



Note: Minimize air convection currents in the reflow oven to avoid component movement. Maximum soldering profile corresponds to the latest IPC/JEDEC J-STD-020.

4 Ordering information

Figure 14. Ordering information scheme

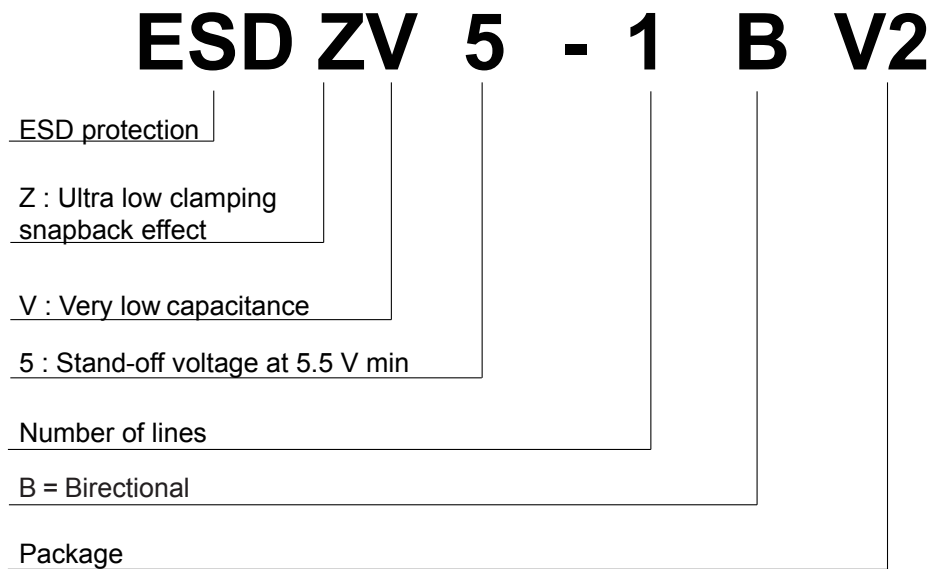


Table 4. Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
ESDZV5-1BV2	J	ST01005	0.041 mg	20000	Tape and reel

1. The marking can be rotated by multiples of 90° to differentiate assembly location

Revision history

Table 5. Document revision history

Date	Revision	Changes
16-Nov-2017	1	Initial release.
27-Feb-2018	2	Updated <i>Section Features</i> and <i>Table 1. Absolute maximum ratings</i> .
06-Nov-2018	3	Updated <i>Section 2.1 Footprint</i> and <i>Table 3. ST01005 package mechanical data</i> .
08-Dec-2020	4	Updated <i>Figure 13. Marking layout</i> .
14-Oct-2024	5	Updated Table 3 .

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 STMicroelectronics – All rights reserved