

3-axis low-*g* accelerometer

Features

- $\pm 2/4/8/16\text{ g}$ user-selectable, full-scale measurement ranges
- 12-bit acceleration data
- 8-bit temperature sensor data
- Low noise: $230\text{ }\mu\text{g}/\sqrt{\text{Hz}}$ typical in high-performance mode
- Low-power capability:
 - $\leq 1\text{ }\mu\text{A }I_{\text{DD}}$ for ODRs up to 6.25 Hz
 - $< 4\text{ }\mu\text{A }I_{\text{DD}}$ for ODRs up to 50 Hz
- Post-board mount zero-*g* offset and TCO performance of $\pm 30\text{ mg}$ (typ) and $\pm 0.15\text{ mg}/^{\circ}\text{C}$ (typ), respectively
- Selectable ODRs from 0.78 to 3200 Hz in both low-power and high-performance modes
- Flexible performance mode allowing custom ODRs with programmable decimation (resolution) and idle-time settings
- 144 byte output data buffer (FIFO/LIFO) capable of storing up to 32 12-bit X/Y/Z data triplets
- Flexible Sensor Data Change Detection (SDCD) function for realizing motion or no motion, high-*g*/low-*g*, freefall, and other inertial events
- Autonomous orientation detection function (portrait/landscape/up/down)
- Self-governed low-power motion-detection mode with one wire interface option
- 12-bit vector magnitude calculation
- Trigger input for synchronizing data collection with an external system
- I²C interface frequencies up to 1 MHz; 3- and 4-wire SPI interface with clock frequencies up to 4 MHz
- Bidirectional, robust self-test diagnostic: Device motion or orientation does not impact the result.

Applications

Industrial IOT

- Asset tracking
- Equipment monitoring
- Smart metering / tamper detection
- Tilt measurement, orientation detection, vibration sensing
- Surveillance
- Point of sale devices
- Indoor localization

Medical

- Patient activity monitors
- Drug delivery
- Clinical care
- Smart inhalers

Consumer devices

- Connected home
- Wearables
- Portable electronics
- Tilt sensing
- Mobile accessories

Description

FXLS8971CF is a compact 3-axis MEMS accelerometer designed for use in a wide range of industrial and medical IoT applications that require ultra-low-power wake-up on motion as well as good performance over temperature. The part supports both high-performance and low-power operating modes, allowing maximum flexibility to meet the resolution and power needs for various unique use cases. A number of advanced, integrated digital features enable designers to reduce the overall system power consumption and simplify host data collection.

FXLS8971CF is available in a 3 mm x 3 mm x 1.25 mm 12-pin QFN package with 0.65 mm pitch and wettable flanks. The device is qualified to industrial standards over the extended -40°C to $+105^{\circ}\text{C}$ temperature range. The combination of sensor performance, system power-saving features, and extended over-temperature-range performance makes FXLS8971CF an ideal accelerometer for motion and position sensing in the industrial and medical IoT market segments.

1 Ordering information

Table 1. Ordering information

Type number	Package		
	Name	Description	Version
FXLS8971CF	PQFN12	Plastic, quad flat package, no leads; 12 terminals; 0.65 mm pitch; 3 mm x 3 mm x 1.25 mm body	SOT2197-1(SC)


1.1 Ordering options

Table 2. Ordering options

Part number	Temperature range	Package description	Shipping
FXLS8971CFR1	-40°C to +105°C	QFN-12	Tape and reel (1.25 k)

2 Block diagram

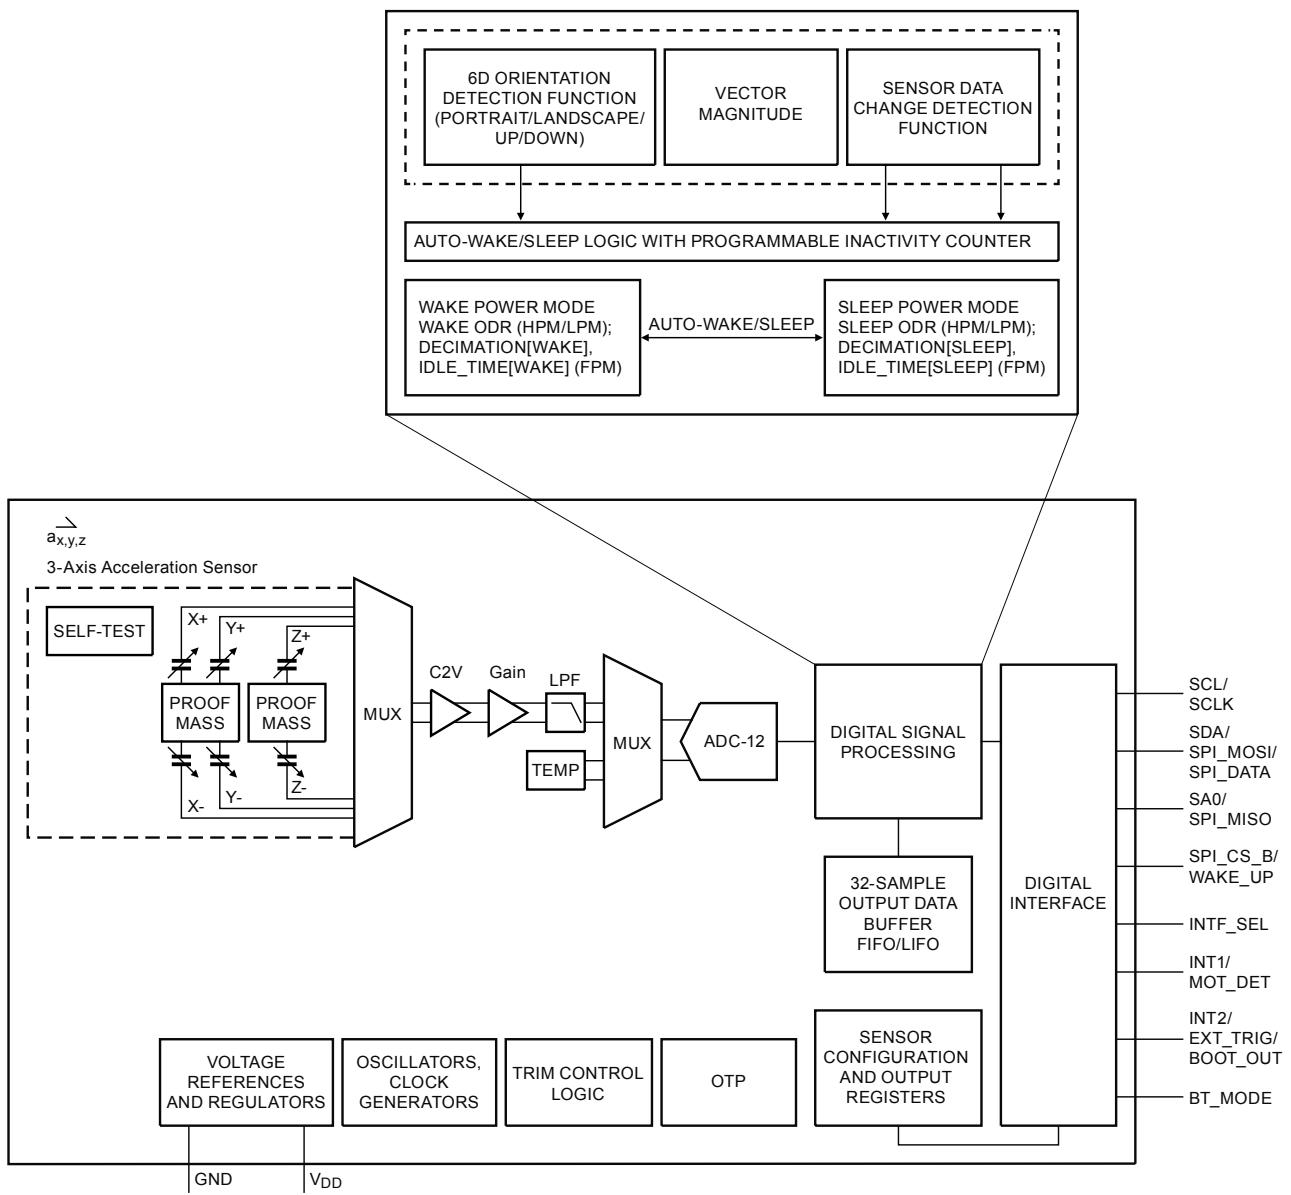Figure 1. Block Diagram




aaa-040827

3 Pinning information

3.1 Pinning

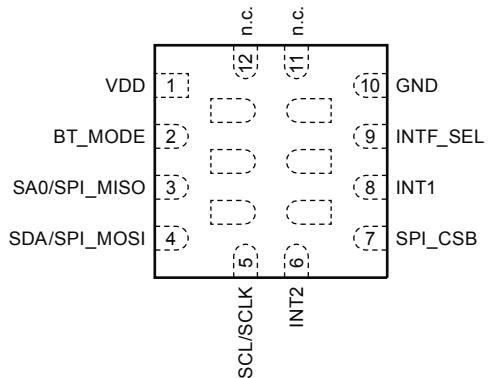Figure 2. Pin configuration diagram



3.2 Pinning description

Table 3. Pin descriptions


Symbol	Pin	Description
V_{DD}	1	Sensor and digital interface supply voltage: 1.71 VDC to 3.6 VDC.
BT_MODE	2	Device boot mode selection. ⁽¹⁾ GND: Default operating mode enabled V_{DD} : Motion Detection mode enabled
SA0 / SPI_MISO	3	Mode-dependent Multifunction serial interface pin. ⁽²⁾ INTF_SEL = V_{DD} : <ul style="list-style-type: none">SPI_MISO: In 4-wire SPI mode this pin functions as the serial data output. INTF_SEL = GND: <ul style="list-style-type: none">SA0: This pin selects the least significant bit of the device I²C secondary address.
SDA / SPI_MOSI / SPI_DATA	4	Mode-dependent Multifunction serial interface pin. ⁽²⁾ INTF_SEL = V_{DD} : <ul style="list-style-type: none">SPI_MOSI: In 4-wire SPI mode, this pin functions as the serial data input.SPI_DATA⁽³⁾: In 3-wire SPI mode, this pin functions as the bidirectional serial data input/output. INTF_SEL = GND: <ul style="list-style-type: none">SDA: This pin functions as the I²C Serial Data input/output.
SCL / SCLK	5	Mode-dependent Multifunction serial interface pin. ⁽²⁾ INTF_SEL = V_{DD} : <ul style="list-style-type: none">SPI serial clock input (3- and 4-wire modes) INTF_SEL = GND: <ul style="list-style-type: none">I²C serial clock input
INT2 / EXT_TRIG / BOOT_OUT	6	Mode-dependent multifunction I/O pin 2. ⁽²⁾

Symbol	Pin	Description
		BT_MODE = V_{DD} : Open-drain ⁽⁴⁾ output signaling the device boot process has completed. This pin is typically connected to MOT_DET in a wired-AND configuration; a pull-up resistor is required. BT_MODE = GND: Programmable interrupt output pin 2 ⁽⁵⁾ / External measurement trigger input. This pin should be left unconnected if unused in the application circuit.
SPI_CS_B / WAKE_UP	7	SPI chip select input, active low / Hibernate mode wake-up pin. ⁽⁶⁾ The WAKE_UP function is only available when BT_MODE = GND.
		Mode-dependent multifunction I/O pin 1. ⁽⁷⁾ BT_MODE = GND: Programmable interrupt output pin 1. ⁽⁵⁾ This pin should be left unconnected if unused in the application circuit.
INT1 / MOT_DET	8	BT_MODE = V_{DD} : MOT_DET multifunction I/O. ⁽⁴⁾ The host MCU sets this pin high through a pull-up resistor to enable motion detection, and drives it low for greater than $T_{MOT-HIB}$ ms to disable motion detection and enter Hibernate mode. FXLS8971CF will pulse the line low for $T_{PULSE-MOT}$ ms after motion is detected. This line may also be used to select the motion detection threshold. See Section 11: Operating modes for more information.
		Device interface mode selection pin.
INTF_SEL	9	V_{DD} : SPI interface mode ⁽³⁾ GND: I ² C interface mode
GND	10	Supply return connection.
NC	11	No connection.
NC	12	No connection

1. *BT_MODE state is latched after POR.*
2. *Under Hibernate mode, pin configuration is High Impedance.*
3. *3-wire SPI mode may be selected in **SENS_CONFIG1[SPI_M]**; 3-wire operation is also possible by directly connecting the SPI_MISO and SPI_MOSI pins together on the PCB.*
4. *An external pull-up resistor is required on this pin when BT_MODE = V_{DD} .*
5. *This pin is configurable as either an input or output (push-pull or open-drain/open-source output type), but defaults to a push-pull output after POR, or after exiting Hibernate mode.*
6. *Under Hibernate mode, pin configuration is High Impedance (when BT_MODE = V_{DD}) and CMOS Input (when BT_MODE = GND).*
7. *Under Hibernate mode, pin configuration is High Impedance (when BT_MODE = GND) and CMOS Input (when BT_MODE = V_{DD}).*

3.3 Orientation

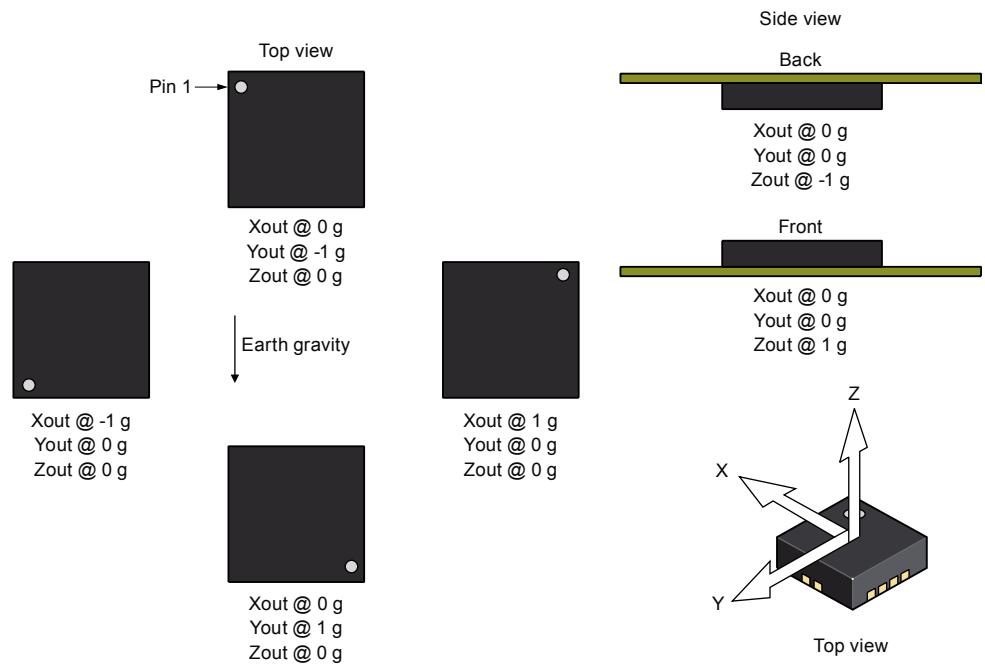Figure 3. Sensitive axes orientation and output response to $\pm 1\text{ g}$ (gravity) stimulus



4 Limiting values

The limiting values are the absolute maximum ratings the device can be exposed to without damage. Functional operation at absolute maximum rating is not guaranteed.

Although this device contains circuitry to protect against damage due to high static voltage or electrostatic fields, it is advised that normal precautions be taken to avoid application of any voltage higher than the maximum-rated voltage.

Table 4. Device absolute maximum ratings

Symbol	Rating	Min	Max	Unit
ACC _{max-2k}	Maximum applied acceleration, 0.5 ms duration	—	2,000	g
ACC _{max-10k}	Maximum applied acceleration, 0.1 ms duration	—	10,000	g
VDD _{MAX}	Maximum sensor supply voltage	0	+3.6	V
VIN _{MAX}	Maximum voltage level applied to any input pin	-0.3	VDD+0.3	V
T _{OP}	Operating temperature range	-40	+105	°C
T _{STG}	Storage temperature range	-40	+125	°C

Table 5. ESD and latch-up-protection characteristics

Symbol	Rating	Min	Unit
V _{HBM}	Human Body Model	±2000	V
V _{CDM}	Charged Device Model	±500	V
I _{LU}	Latch-up current at T = +105 °C	±100	mA

CAUTION



This device is sensitive to mechanical shock. Improper handling can cause permanent damage to the part or cause the part to otherwise fail.

CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Observe precautions for handling electrostatic sensitive devices.

Such precautions are described in the *ANSI/ESD S20.20*, *IEC/ST 61340-5*, *JESD625-A* or equivalent standards.

5 Recommended operating conditions

Table 6. Nominal operating conditions

Symbol	Parameter	Min	Typ	Max	Unit
V_{DD}	Supply voltage	1.71	3.0	3.6	V
Top	Operating temperature range	-40	+25	+105	°C

6 Mechanical characteristics

Table 7. Accelerometer sensor performance parameters

$V_{DD} = 3.0 \text{ V}$, $T = 25^\circ\text{C}$, unless otherwise noted.

Typical values represent mean or mean $\pm 1 \sigma$ values, depending on the specific parameter.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
n_{ACC}	Output data width	—	—	12	—	bits
FSR	Full-scale measurement range	$\pm 2 \text{ g}$ mode	—	± 2	—	g
		$\pm 4 \text{ g}$ mode	—	± 4	—	
		$\pm 8 \text{ g}$ mode	—	± 8	—	
		$\pm 16 \text{ g}$ mode	—	± 16	—	
SEN	Nominal sensitivity	$\pm 2 \text{ g}$ mode	—	0.98	—	mg/LSB
		$\pm 4 \text{ g}$ mode	—	1.95	—	
		$\pm 8 \text{ g}$ mode	—	3.91	—	
		$\pm 16 \text{ g}$ mode	—	7.81	—	
		$\pm 2 \text{ g}$ mode	—	1024	—	LSB/g
		$\pm 4 \text{ g}$ mode	—	512	—	
		$\pm 8 \text{ g}$ mode	—	256	—	
		$\pm 16 \text{ g}$ mode	—	128	—	
SEN_{TOL}	Sensitivity tolerance	-40°C to $+105^\circ\text{C}$	-10	± 2.5	10	%SEN
TCS_{PBM}	Temperature coefficient of sensitivity, post board mount, $\text{FSR} \leq \pm 4 \text{ g}$ ⁽¹⁾⁽²⁾	-40°C to $+105^\circ\text{C}$, delta from 25°C	-0.023	± 0.005	0.023	%/ $^\circ\text{C}$
OFF_{PBM}	Zero-g offset, post-board mount, $\text{FSR} \leq \pm 8 \text{ g}$ ⁽¹⁾⁽²⁾	-40°C to $+105^\circ\text{C}$	-120	± 30	120	mg
TCO_{PBM}	Zero-g offset temperature coefficient, post-board mount, $\text{FSR} \leq \pm 8 \text{ g}$ ⁽¹⁾⁽²⁾	-40°C to $+105^\circ\text{C}$, delta from 25°C	-0.8	0.20	0.8	$\text{mg}/^\circ\text{C}$
CAS	Cross-axis sensitivity ⁽³⁾	$\pm 2/4 \text{ g}$ mode	—	± 0.5	—	%
STOC	Self-test output change ⁽⁴⁾	$\pm 4 \text{ g}$ mode, X axis	-206	-139	-81	LSB
		$\pm 4 \text{ g}$ mode, Y axis	78	137	207	
		$\pm 4 \text{ g}$ mode, Z axis	-727	-448	-120	
		$\pm 8 \text{ g}$ mode, X axis	-103	-69	-40	
		$\pm 8 \text{ g}$ mode, Y axis	38	68	103	
		$\pm 8 \text{ g}$ mode, Z axis	-355	-223	-71	
		$\pm 16 \text{ g}$ mode, X axis	-52	-35	-19	
		$\pm 16 \text{ g}$ mode, Y axis	19	34	52	
		$\pm 16 \text{ g}$ mode, Z axis	-178	-112	-35	
STOF	Self-test offset ⁽⁴⁾	$\pm 4 \text{ g}$ mode	-1600	—	± 1600	LSB
		$\pm 8 \text{ g}$ mode	-800	—	± 800	
		$\pm 16 \text{ g}$ mode	-400	—	± 400	
BW _{MAX}	Maximum signal bandwidth	ODR = 3200 Hz	—	1600	—	Hz
ODR _{MAX}	Maximum ODR	—	—	3200	—	Hz
NSD _{HPM}	Noise Spectral Density, High Performance Mode, $\text{FSR} \leq \pm 4 \text{ g}$, $25 \text{ Hz} \leq \text{ODR} \leq 3200 \text{ Hz}$	XY axes	—	217	—	$\mu\text{g}/\sqrt{\text{Hz}}$
		Z axis	—	257	—	

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
NRMS _{LPM}	Noise RMS, Low-Power Mode, FSR $\leq \pm 4$ g, all ODR ranges ⁽⁵⁾	XY axes	—	7.8	—	mg
		Z axis	—	9.4	—	

1. Determined with post board mount data using a standard lead-free reflow profile and ST recommended landing pattern on a 10-layer FR4 PCB with 1.6 mm (63 mil) overall thickness.
2. Based on characterization data on limited number of parts from 3 lots. Limits provided with 4 sigma margin and 99% confidence level.
3. See [Cross-axis sensitivity in Section 17: Glossary](#).
4. See [Self-Test in Section 17: Glossary](#)
5. In low-power mode, higher ODR settings result in a lower noise density figure.

Typical performance

Device typical performance characteristics are illustrated in the charts shown in [Figure 4. Offset drift vs. temperature](#), [Figure 5. XYZ_TCO histograms](#), and [Figure 6. XYZ_TCS histograms](#). They represent post-board mount measurements on a three lot sample set.

Offset drift is computed from the 25°C room temperature offset.

Similarly, offset and sensitivity temperature coefficients (resp. TCO and TCS) are computed with the 105°C data or 40°C data compared to the 25°C data. They are referred to as TCO or TCS “Hot” (25°C to 105°C) and “Cold” (−40°C to 25°C).

Figure 4. Offset drift vs. temperature

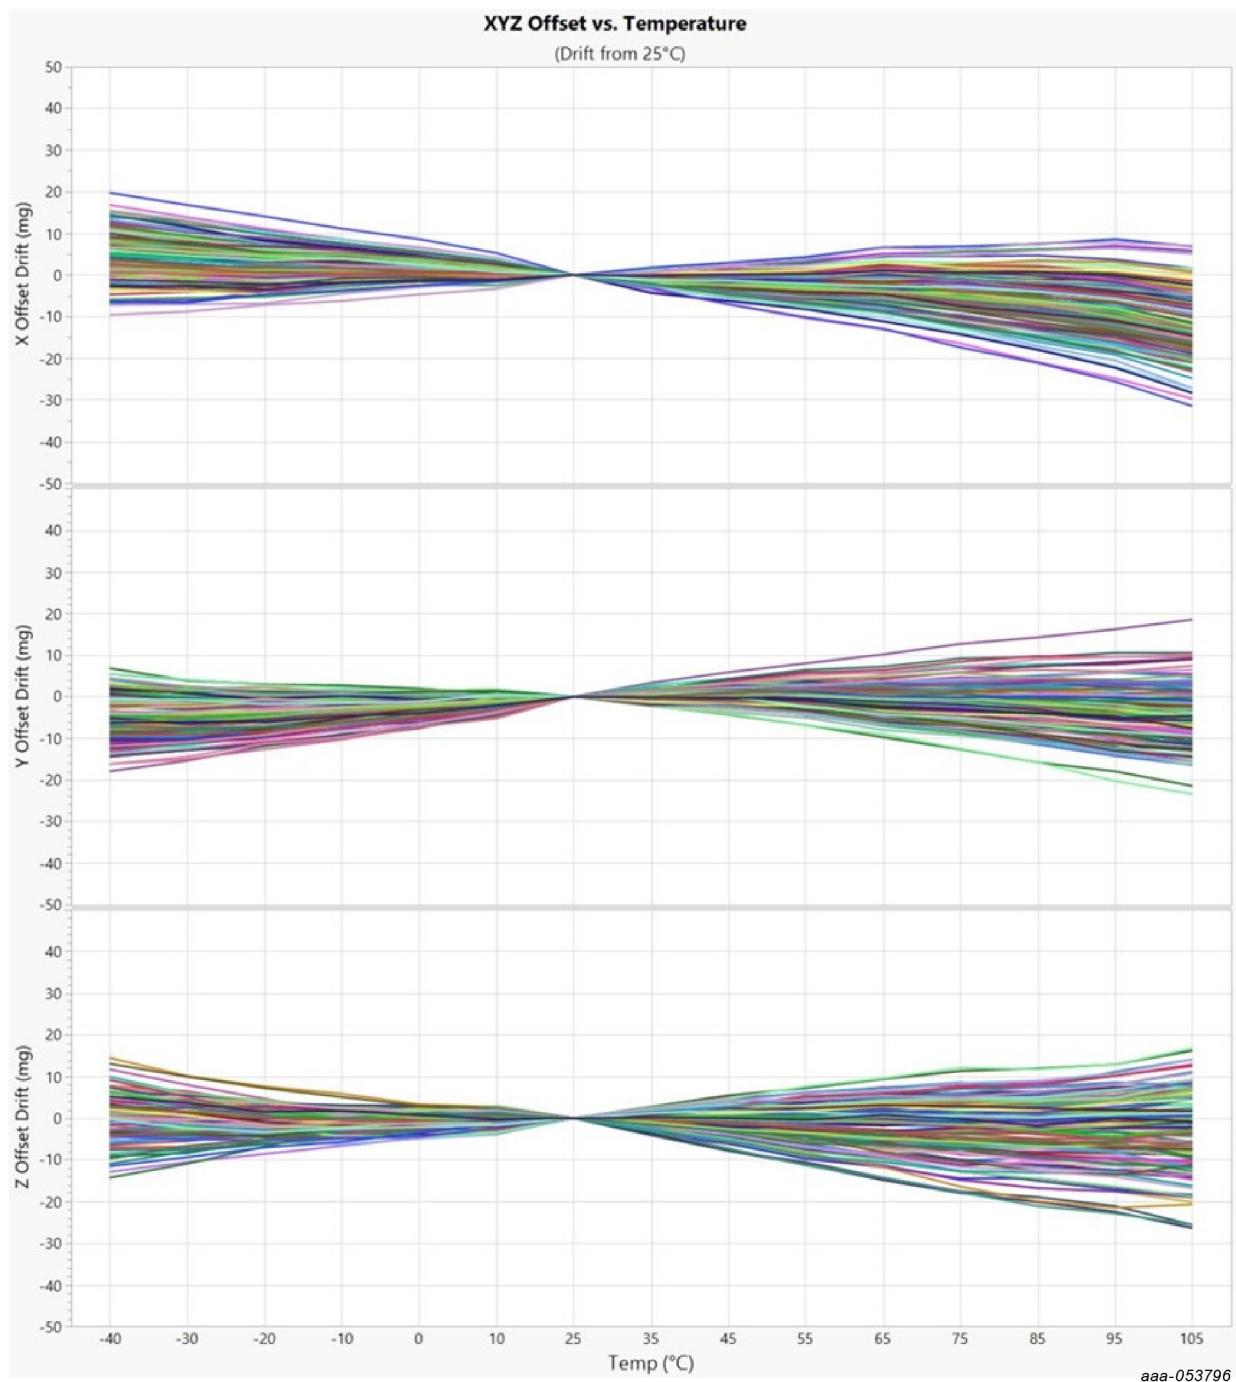


Figure 5. XYZ_TCO histograms


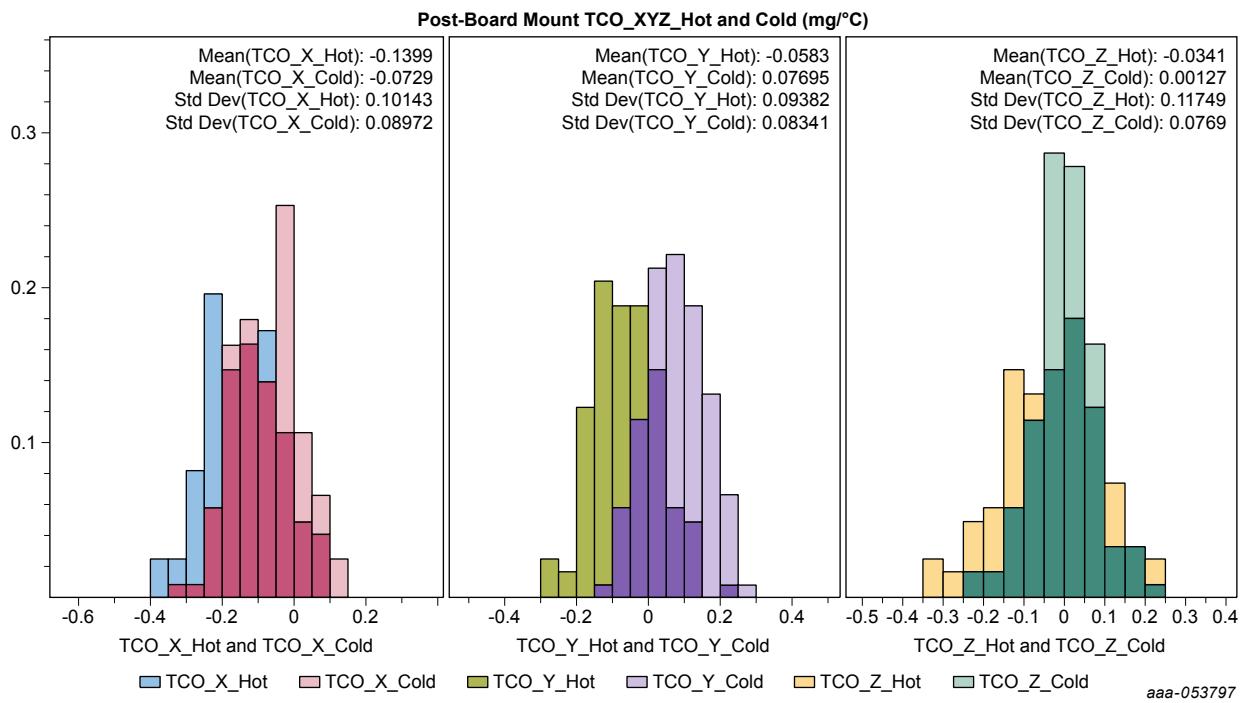


Figure 6. XYZ_TCS histograms

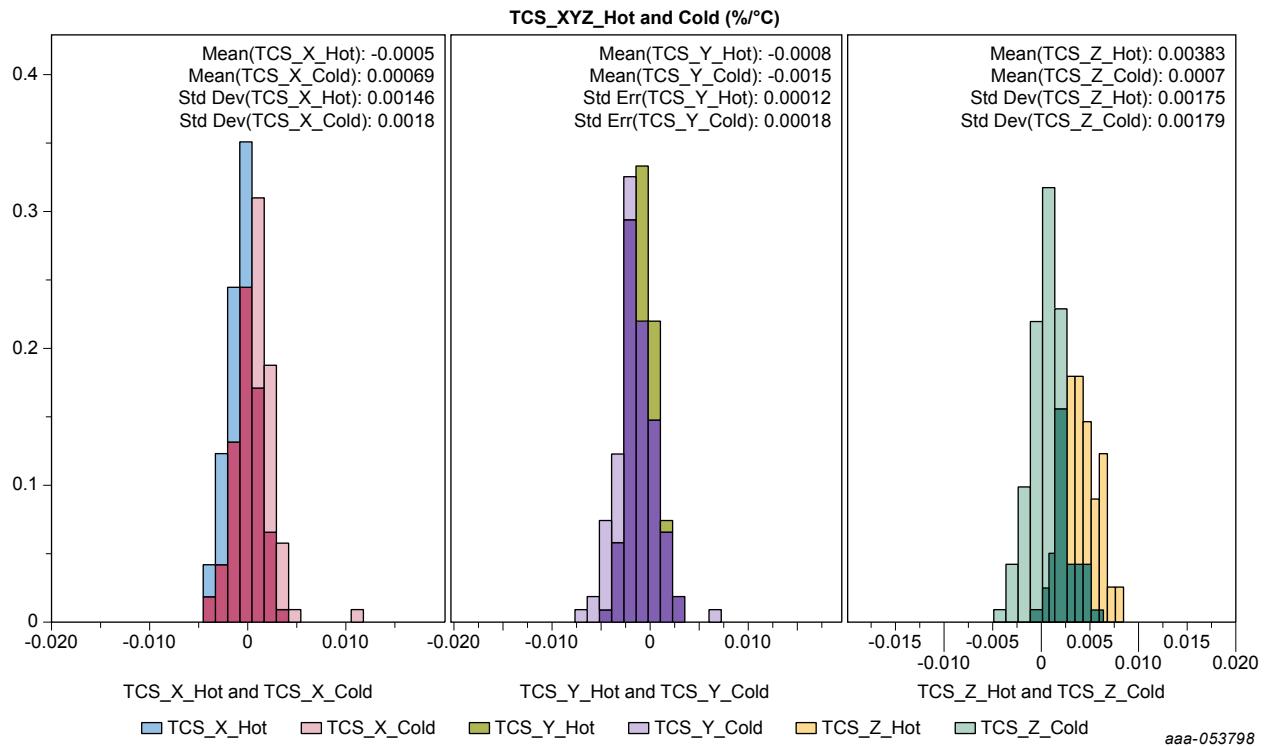

7 Electrical characteristics

Table 8. Electrical characteristics

$V_{DD} = 3.0 \text{ V}$, $T = 25^\circ\text{C}$, unless otherwise noted.

Typical values represent mean or mean $\pm 1 \sigma$ values, depending on the specific parameter.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{DD}	Supply voltage	—	1.71	3.0	3.6	V
IDD_{HPM}	Average current draw in High Performance mode	ODR independent, $T = 25^\circ\text{C}$	—	146.9	—	μA
IDD_{LPM}	Average current draw in low-power mode	ODR = 3200 Hz, $T = 25^\circ\text{C}$	—	146.9	—	μA
		ODR = 1600 Hz, $T = 25^\circ\text{C}$	—	73.9	—	
		ODR = 800 Hz, $T = 25^\circ\text{C}$	—	37.5	—	
		ODR = 400 Hz, $T = 25^\circ\text{C}$	—	19.4	—	
		ODR = 200 Hz, $T = 25^\circ\text{C}$	—	10.4	—	
		ODR = 100 Hz, $T = 25^\circ\text{C}$	—	5.04	—	
		ODR = 50 Hz, $T = 25^\circ\text{C}$	—	2.75	—	
		ODR = 25 Hz, $T = 25^\circ\text{C}$	—	1.6	—	
		ODR = 12.5 Hz, $T = 25^\circ\text{C}$	—	1.21	—	
		ODR = 6.25 Hz, $T = 25^\circ\text{C}$	—	0.84	—	
		ODR = 3.125 Hz, $T = 25^\circ\text{C}$	—	0.65	—	
		ODR = 1.563 Hz, $T = 25^\circ\text{C}$	—	0.56	—	
		ODR = 0.781 Hz, $T = 25^\circ\text{C}$	—	0.51	—	
IDD_{STBY}	Supply current draw in Standby mode	$T = 25^\circ\text{C}$	—	0.46	—	μA
IDD_{HIB}	Supply current draw in Hibernate mode	$T = 25^\circ\text{C}$	—	15	—	nA
VIH	High-level input voltage: SCL/SCLK, SDA/SPI_MOSI/SPI_DATA, SA0, INTF_SEL, BT_MODE, SPI_CS_B/WAKE_UP, MOT_DET, EXT_TRIGGER pins	—	$0.7 * V_{DD}$	—	—	V
VIL	Low-level input voltage: SCL/SCLK, SDA/SPI_MOSI/SPI_DATA, SA0, INTF_SEL, BT_MODE, SPI_CS_B/WAKE_UP, MOT_DET, EXT_TRIGGER pins	—	—	—	$0.3 * V_{DD}$	V
VOH	High-level output voltage: INT1/MOT_DET, INT2/BOOT_OUT, SPI_MISO, SPI_DATA pins	$Io = 500 \mu\text{A}$	$0.9 * V_{DD}$	—	—	V

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
VOL	Low-level output voltage: INT1/MOT_DET, INT2/BOOT_OUT, SPI_MISO, SPI_DATA pins	Io = 500 μ A	—	—	0.1 * V _{DD}	V
VOL _{SDA, SCL}	Low-level output voltage on SDA and SCL pins	Io = 5 mA	—	—	0.4	V
T _{PULSE-MOT}	Motion detected interrupt pulse width	BT_MODE = V _{DD}	4.55	5	5.56	ms
T _{MOT-HIB}	MOT_DET pin low time before entering Hibernate mode ⁽¹⁾	BT_MODE = V _{DD}	0.91	1	6.8	ms
T _{PULSE-WIN}	Motion detection threshold setting pulse window	BT_MODE = V _{DD} , MOT_DET = HIGH	4.55	5	5.56	ms
T _{PULSE-THRES1}	Motion detection threshold selection 1 – Pulse width range	BT_MODE = V _{DD}	562.5	625	883	μ s
T _{PULSE-THRES2}	Motion detection threshold selection 2 – Pulse width range	BT_MODE = V _{DD}	1125	1250	1570	μ s
T _{PULSE-THRES3}	Motion detection threshold selection 3 – Pulse width range	BT_MODE = V _{DD}	2250	2500	2950	μ s
T _{PULSE-DRDY}	DRDY interrupt output pulse width	BT_MODE = GND	29	32	35.6	μ s
T _{PULSE-BOOT1}	BOOT interrupt output pulse width	BT_MODE = GND	58	64	71.2	μ s
T _{PULSE-BOOT2}		BT_MODE = V _{DD}	9	10	11.2	ms
ODR _{TOL}	Output Data Rate frequency tolerance	—	-10	± 2.5	10	%ODR
T _{FLT-MOT_DET}	MOT_DET pin deglitch filter time	BT_MODE = V _{DD}	—	10	—	μ s
T _{FLT-WAKE_UP}	MOT_DET, WAKE_UP pin deglitch filter time (transition out of Hibernate mode)	BT_MODE = GND, SPI_CS_B / WAKE_UP pin	—	400	—	ns
		BT_MODE = V _{DD} , MOT_DET pin	—	850	—	
T _{BOOT1}	Time needed to enter Standby mode after POR or soft reset	BT_MODE = GND	—	—	1	ms
T _{BOOT2}	Time needed to enter Motion Detection mode after POR or soft reset	BT_MODE = V _{DD} , MOT_DET = 1	—	—	17.7	ms
IDD _{BOOT}	Boot sequence peak current draw	T = -40°C to +105°C; with no decoupling capacitors on V _{DD} pin	—	—	5	mA
T _{ON}	Transition time (Standby mode to Active mode with valid data output)	—	—	0.5285 + (DEC - 1) \times 998.4 / (ODR \times DEC) ⁽²⁾	—	ms
T _{OP}	Operating temperature range	—	-40	—	+105	°C

1. Max spec covers the situation where an interrupt pulse is issued by the sensor at the same time the host MCU drives MOT_DET low to signal a hibernate command. In that case, their durations add up.
2. DEC = decimation factor. The selected ODR and operating mode determines the decimation factor. See [Section 12.3.3: SENS_CONFIG3 register \(address 17h\)](#) for more information on setting or determining the measurement decimation factor. In LPM, the DEC factor is fixed at 1, making the time to first sample output fixed at 528.5 μ s (typ), independent of the selected ODR.

8 Temperature sensor characteristics

Table 9. Temperature sensor performance parameters

$V_{DD} = 3.0$ V, $T = 25$ °C, unless otherwise noted.

Typical values represent mean or mean $\pm 1 \sigma$ values, depending on the specific parameter.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
n_{TEMP}	Output data width	—	—	8	—	bits
FSR_{TEMP}	Measurement range	—	—	–40 to +105	—	°C
SEN_{TEMP}	Sensitivity	—	—	1	—	°C/LSB
$SEN_{TOL-TEMP}$	Sensitivity tolerance	—	—	± 2.5	—	%
OFF_{TEMP}	Nominal zero-output offset temperature	Output Code = 00h	—	25	—	°C

9 I²C digital interface

The registers embedded within FXLS8971CF may be accessed using an I²C interface when the INTF_SEL pin is tied to GND. If the V_{DD} supply is not present, the device is in shutdown mode and any communications on the interface are ignored. When the device is on a common I²C-bus with other secondary devices, the V_{DD} supply pin must be left unconnected (high-impedance) when the device supply is turned off to ensure that the internal ESD protection diodes do not become forward biased and prevent the bus from functioning normally (clamping).

The I²C secondary interface port of FXLS8971CF is compliant with the following three operating modes as defined in UM10204 [3] :

- Fast-mode Plus (Fm+) at 1000 kHz
- Fast-mode (Fm) at 400 kHz
- Standard-mode (Sm) at 100 kHz

Table 10. I²C serial interface pin description

Pin Name	Pin Description
SCL	I ² C serial clock (pull-up resistor is required)
SDA	I ² C serial data (pull-up resistor is required)

9.1 I²C interface characteristics

The I²C secondary address (7-bit format) is set to 18h when SA0 = 0, and 19h when SA0 = 1.

Table 11. FXLS8971CF I²C read and write addresses

SA0	I ² C write address		I ² C read address	
	Min	Max	Min	Max
0	30h (0011 0000b)		31h (0011 0001b)	
1	32h (0011 0010b)		33h (0011 0011b)	


Table 12. I²C secondary timing values for Standard-mode (Sm), Fast-mode (Fm), and Fast-mode Plus (Fm+)

Parameter	Symbol	I ² C Standard-mode ⁽¹⁾		I ² C Fast-mode ⁽¹⁾		I ² C Fast-mode Plus ⁽²⁾		Unit
		Min	Max	Min	Max	Min	Max	
SCL clock frequency	f _{SCL}	0	100	0	400	0	1000	kHz
Bus free time between STOP and START conditions	t _{BUF}	4.7	—	1.3	—	0.5	—	μs
Repeated START hold time	t _{HD;STA}	4	—	0.6	—	0.26	—	μs
Repeated START setup time	t _{SU;STA}	4.7	—	0.6	—	0.26	—	μs
STOP condition setup time	t _{SU;STO}	4	—	0.6	—	0.26	—	μs
SDA valid time ⁽³⁾	t _{VD;DAT}	—	3.45 ⁽⁴⁾	—	0.9 ⁽⁴⁾	—	0.45 ⁽⁴⁾	μs
SDA valid acknowledge time ⁽⁵⁾	t _{VD;ACK}	—	3.45 ⁽⁴⁾	—	0.9 ⁽⁴⁾	—	0.45 ⁽⁴⁾	μs
SDA setup time	t _{SU;DAT}	250	—	100 ⁽⁶⁾	—	50	—	ns
SCL clock low time	t _{LOW}	4.7	—	1.3	—	0.50	—	μs
SCL clock high time	t _{HIGH}	4.0	—	0.6	—	0.26	—	μs
SDA and SCL risetime	t _r	—	1000	20	300	—	120	ns
SDA and SCL fall time ^{(7) (8)}	t _f	—	300	—	300	—	120	ns

Parameter	Symbol	I ² C Standard-mode ⁽¹⁾		I ² C Fast-mode ⁽¹⁾		I ² C Fast-mode Plus ⁽²⁾		Unit
		Min	Max	Min	Max	Min	Max	
Pulse width of spikes on SDA and SCL (suppressed by the input filter)	t_{SP}	0	50	0	50	0	50	ns

1. All values referred to $VIH(min)$ and $VIL(max)$ levels.
2. Should be backward compatible with Fast mode.
3. $t_{VD:DAT}$ referred to the time for data signal from SCL LOW to SDA output (HIGH or LOW, depending on which one is worse).
4. The maximum $t_{HD:DAT}$ could be 3.45 μ s and 0.9 μ s for Standard-mode and Fast-mode respectively, but must be less than the maximum of $t_{VD:DAT}$ or $t_{VD:ACK}$ by a transition time.
5. $t_{VD:ACK}$ = time for ACK signal from SCL LOW to SDA output (HIGH or LOW, depending on which one is worse).
6. A Fast-mode I²C device can be used in a Standard mode I²C system, but the requirement $t_{SU:DAT}$ 250 ns must then be met. Also the acknowledge timing must meet this set-up time.
7. The maximum t_f for the SDA and SCL bus lines is specified at 300 ns. The maximum fall time for the SDA output stage t_f is specified at 250 ns. The maximum fall time allows series protection resistors to be connected in between the SDA and the SCL pins and the SDA/SCL bus lines without exceeding the maximum specified t_f .
8. In Fast-mode Plus, fall time is specified the same for both output stage and bus timing. If series resistors are used, designers should allow for this specified fall time when considering bus timing.

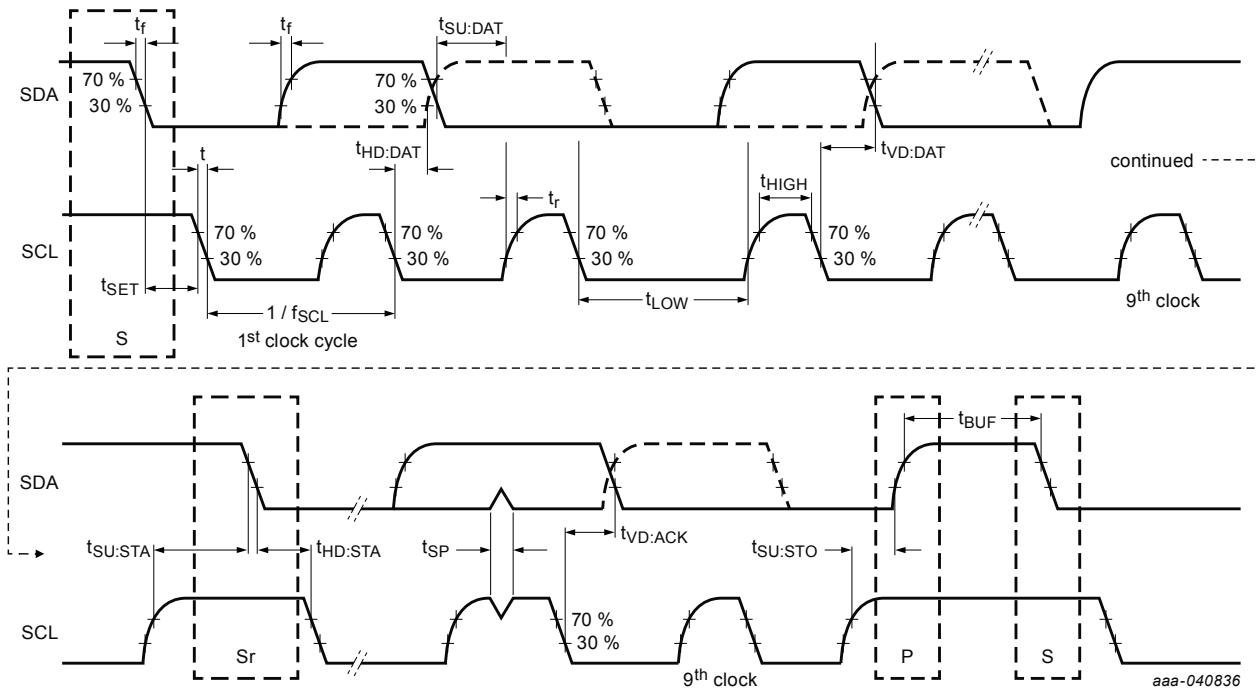Figure 7. I²C secondary timing diagram for Standard-mode, Fast-mode and Fast-mode Plus



9.1.1

General I²C operation

There are two signals associated with the I²C-bus: the Serial Clock Line (SCL) and the Serial Data line (SDA). SDA is a bidirectional signal used for sending and receiving the data to/from the interface. External pull-up resistors connected to V_{DD} are required for SDA and SCL. When the I²C-bus is free, SCL and SDA are high.

The maximum practical operating frequency for I²C in a given system implementation depends on several factors including the pull-up resistor and voltage values and total bus capacitance (PCB trace + parasitic device capacitances).

The **primary** starts a transaction on the bus through a start condition (ST) signal, which is defined as a HIGH-to-LOW transition on SDA line while the SCL line is held HIGH. After the primary transmits the ST signal, the bus is considered busy. The next byte of data transmitted contains the secondary address in the first seven bits, and the eighth bit, the read/write bit, indicates whether the primary is receiving data from the secondary or transmitting data to the secondary. When an address is sent, each device in the system compares the first seven bits after the ST condition with its own address. If they match, the device considers itself addressed by the primary. The ninth clock pulse, following the secondary address byte (and each subsequent byte) is the acknowledge (ACK). The transmitter must release the SDA line during the ACK period. The receiver must then pull the data line low so that it remains stable low during the high period of the acknowledge clock period.

The number of bytes per transfer is unlimited. If a receiver cannot receive another complete byte of data until it has performed some other function, it can hold the SCL line low to force the transmitter into a wait state. Data transfer only continues when the receiver is ready for another byte and releases the clock line. This delay action is called clock stretching. Not all primary devices support clock stretching. This device implements clock stretching—the SCL line may be stretched (pulled low) for up to 1 μ s when needed during a read operation. When applied, clock stretching occurs after the ACK issued by the I²C bus primary.

A LOW-to-HIGH transition on the SDA line while the SCL line is high is defined as a stop condition (SP) signal. The primary issuing the SP signal always terminates a write or burst write. A primary should properly terminate a read by not acknowledging a byte at the appropriate time in the protocol, followed by the SP signal. A primary may also issue a repeated start signal (SR) during a transfer.

9.1.2

I²C read/write operations

9.1.2.1

Single-byte read

The primary transmits a start condition (ST) to FXLS8971CF, followed by the secondary address, with the R/W bit set to '0' for a write, and the FXLS8971CF sends an acknowledgment. Then the primary transmits the address of the register to read and the FXLS8971CF sends an acknowledgment. The primary transmits a repeated start condition (SR), followed by the secondary address with the R/W bit set to '1' for a read from the previously selected register. The FXLS8971CF then acknowledges and transmits the data from the requested register. The primary does not acknowledge (NAK) the transmitted data and then transmits a stop condition to end the data transfer.

9.1.2.2

Multiple-byte read

When performing a multi-byte or *burst* read, FXLS8971CF automatically increments the register read address pointer after a read command is received. Therefore, after following the steps of a single-byte read, multiple bytes of data can be read from sequential register addresses after each FXLS8971CF acknowledgment (ACK) is received. Data can be read until the primary issues a no acknowledge (NAK), followed by a stop condition (SP) signaling the end of the transfer.

9.1.2.3

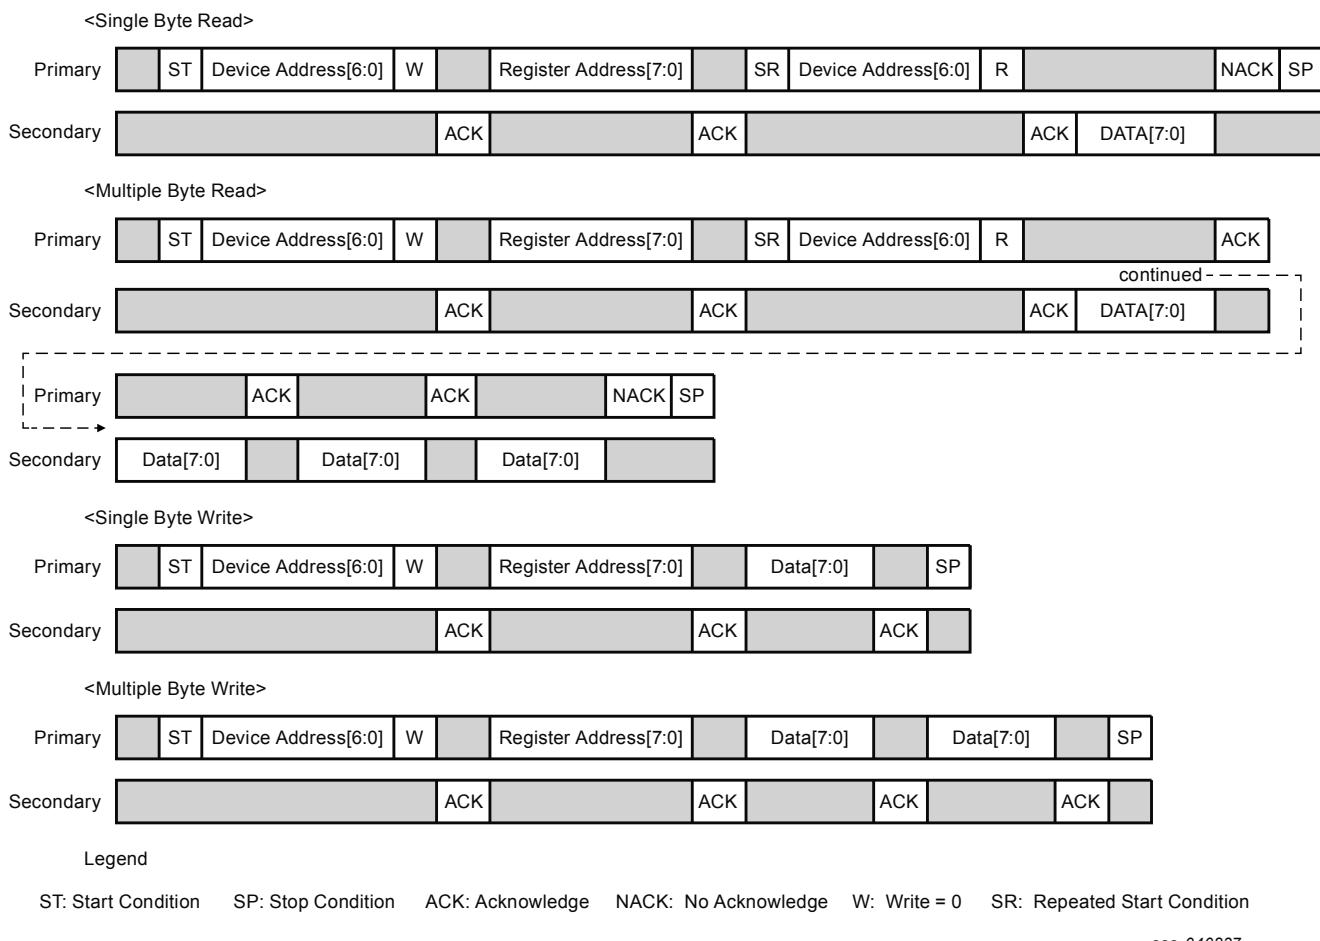
Single-byte write

To start a write command, the primary transmits a start condition (ST) to the FXLS8971CF, followed by the secondary address with the R/W bit set to '0' for a write, and the FXLS8971CF sends an acknowledgment. Then the primary transmits the address of the register to write to, and the FXLS8971CF sends an acknowledgment. Then the primary transmits the 8-bit data to write to the designated register and the FXLS8971CF sends an acknowledgment signaling it has received the data. Since this transmission is complete, the primary transmits a stop condition (SP) to end the data transfer. The data sent to the FXLS8971CF is now stored in the appropriate register.

9.1.2.4

Multiple-byte write

FXLS8971CF automatically increments the register address write pointer after a write command is received. Therefore, after following the steps of a single-byte write, multiple bytes of data can be written to sequential registers after each acknowledgment (ACK) is received.

9.1.2.5 I²C data sequence diagramsFigure 8. I²C Data Sequence Diagrams

aaa-040837

10 SPI interface

The SPI interface is a classic primary/secondary serial port. FXLS8971CF is always considered to be the secondary device and therefore never initiates communication with the host processor.

The SPI interface of FXLS8971CF is compatible with interface mode 00, corresponding to CPOL = 0 and CPHA = 0.

For CPOL = 0, the idle value of the clock is zero, and the active value of the clock is 1. For CPHA = 0, data is captured on the rising edge (low to high transition) of the clock, and data is propagated on the falling edge (high to low transition) of the clock.

10.1 General SPI operation


The SPI_CS_B pin is driven low at the start of a transaction, held low during the transfer, and then driven high again after the transaction is completed. During a transaction, the primary toggles the clock (SCLK). The SCLK polarity is defined as having an idle value that is low, and an active phase that is high (CPOL = 0). Serial input and output data is captured on the rising edge of the clock and propagated on the falling edge (CPHA = 0). Single-byte read and single-byte write operations are completed in 24 SCLK cycles; multiple-byte reads and writes are completed in additional multiples of 8 SCLK cycles per read or written byte. The first SCLK cycle latches the R/W (Read/Write) bit to select whether the desired operation is a read (R/W = 1) or a write (R/W = 0). The following seven SCLK cycles are used to latch the register read or write address.

Note: 4-wire SPI interface mode is the default out of POR or after a soft reset. In order to select 3-wire SPI interface mode, set the **SENS_CONFIG1[SPI_M]** = 1.

10.2 SPI write operations with 3- or 4-wire mode


A write operation is initiated by transmitting a 0 for the R/W bit. Then, the 7-bit register write address, A[6:0], is transmitted in MSB first order. Following this first byte, a second byte of 0s or 1s (don't care condition) transfers, followed by the actual data to write in the third group of 8 SCLK cycles (clock pulses 17 through 24) in MSB first order. Figure 9 shows the bus protocol for a single-byte register write operation in either 3- or 4-wire SPI mode.

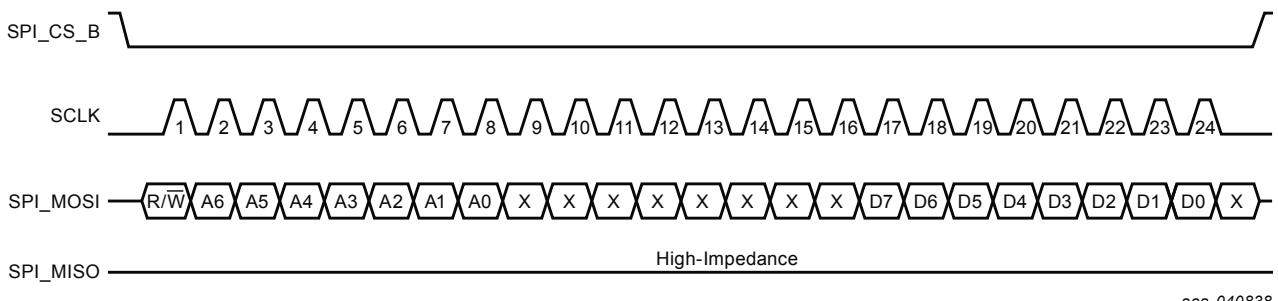Figure 9. SPI single-byte write protocol diagram (3- or 4-wire mode), R/W = 0



Multiple-byte write operations are performed similarly to the single-byte write sequence, but with additional data bytes transferred over additional 8 SCLK cycle periods. FXLS8971CF auto-increments the register write address so that every eighth clock edge latches the address for the next register write address. When the desired number of bytes has been written, a rising edge on the SPI_CS_B pin terminates the transaction. Figure 10 shows the bus protocol for multiple-byte register write operations in either 3- or 4-wire SPI mode.

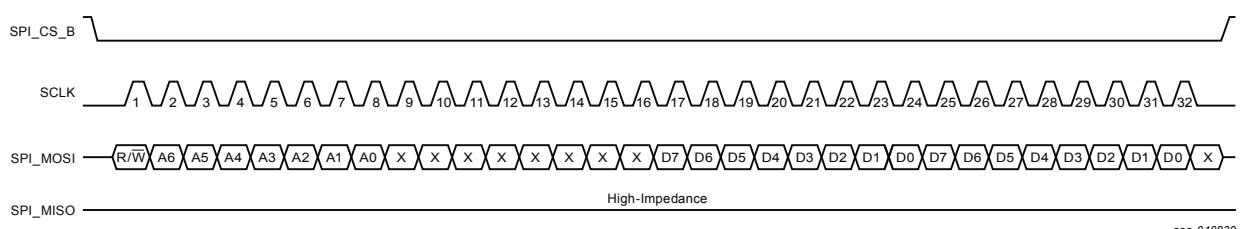
Figure 10. SPI multiple-byte write protocol diagram (3- or 4-wire mode), R/W = 0



10.3 SPI read operations with 4-wire mode


A register read operation is initiated by transmitting a 1 for the R/W bit. Then, the 7-bit register read address, A[6:0] is encoded in the first byte. Following this first byte, a second byte of 0s or 1s (don't care condition) transfers. After this transfer completes, the next 8 SCLK cycles (pulses 17 through 24) output the selected register content on the SPI_MISO line in MSB first order. Figure 11 shows the bus protocol for a single-byte read operation.

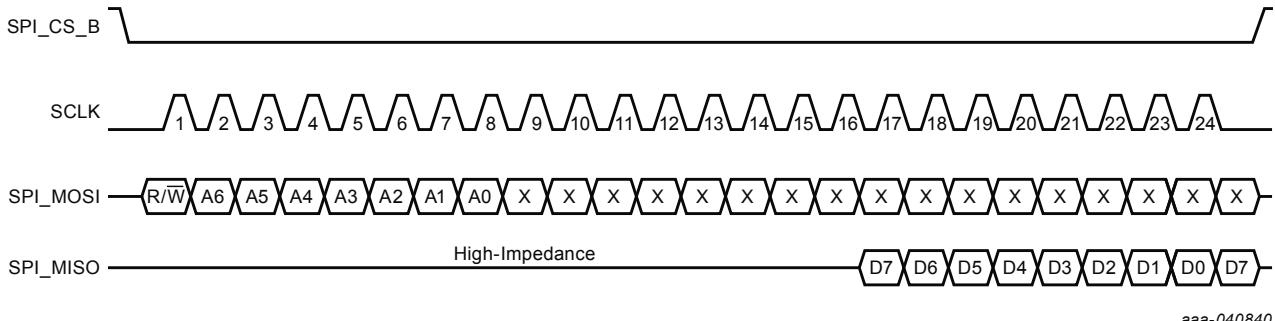Figure 11. SPI single-byte read protocol diagram (4-wire mode), R/W = 1



Multiple-byte read operations are performed similarly to single-byte reads with additional bytes read out in multiples of eight SCLK cycles. FXLS8971CF auto-increments the register read address so that every eighth clock edge latches the address of the next sequential register read address. When the desired number of bytes has been read, a rising edge on SPI_CS_B terminates the transaction.

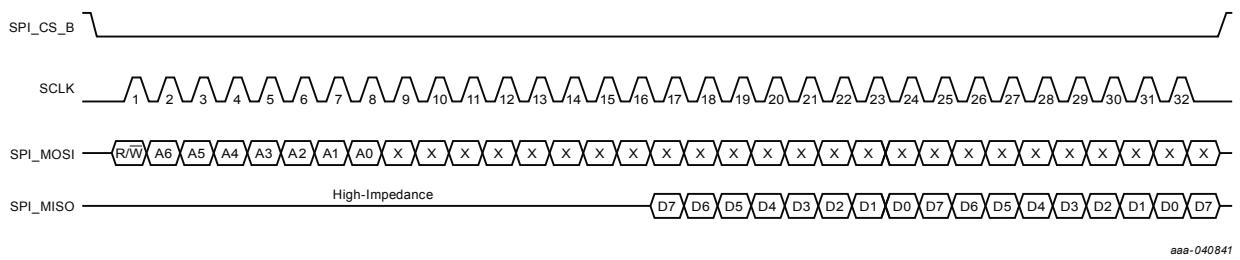Figure 12. SPI multiple-byte read protocol diagram (4-wire mode), R/W = 1



10.4 SPI read operations with 3-wire mode

FXLS8971CF can be configured to operate in 3-wire software enabled SPI mode. In this mode, the SPI_MISO pin is left unconnected and the SPI_MOSI pin becomes a bidirectional input/output pin (SPI_DATA). Read operations in 3-wire mode are the same as write operations in 3- and 4-wire modes, except that at the end of the address cycle (falling edge of clock pulse 16), the SPI_DATA pin automatically switches from an input to an output and with bit D7 as the current output state.

Figure 13. SPI single-byte read protocol diagram (3-wire mode)

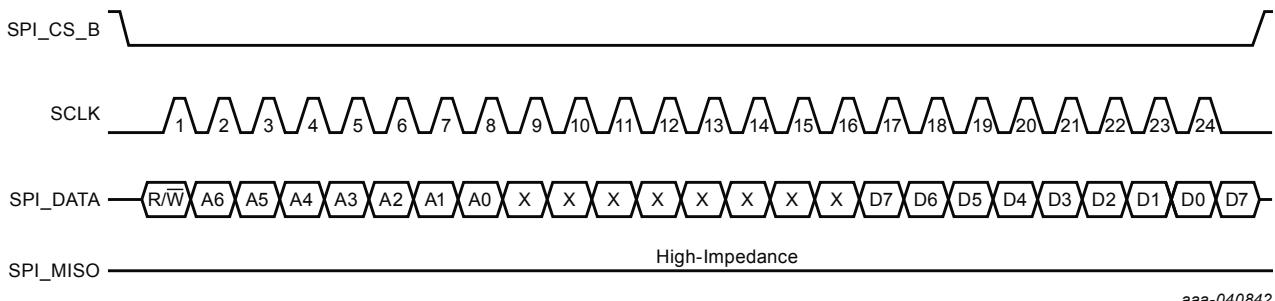
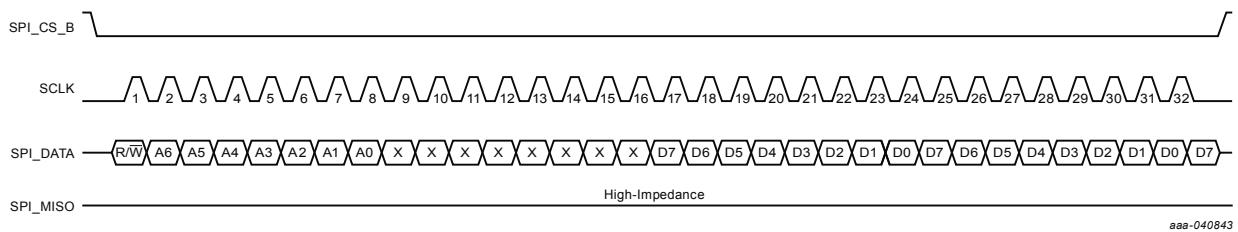



Figure 14. SPI multiple-byte read protocol diagram (3-wire mode)


10.5 SPI timing specifications (4-wire mode and 3-wire hardwired modes)

Table 13 and Figure 15 specify and illustrate the minimum and maximum timing parameter values for correct SPI interface functionality when FXLS8971CF is operated in 4-wire and 3-wire hardwired SPI modes. FXLS8971CF only supports SPI mode 00, corresponding to CPOL = 0, and CPHA = 0. In this mode, the active state of the clock is high and the idle state is low. Data is latched on the rising edge of the clock and propagated on the falling edge. All timing specifications shown in Table 13 were determined under the following conditions: 10 pF capacitor and 1 kΩ pull-up resistor present on all SPI signals, 105 °C, 1.8 V.

Table 13. Secondary timing values

Label	Description	Specifications		Unit
		Min.	Max.	
fSCLK	SCLK frequency	0	4	MHz
tSCLK	SCLK Period	250	—	ns
tSCLKH	SCLK high time	100	—	ns
tSCLKL	SCLK low time	100	—	ns
tHZ	Hold time for SPI_MISO signal (transition back to high-z state)	—	15	ns
tSCS	Setup time for SPI_CS_B signal	125	—	ns
tHCS	Hold time for SPI_CS_B signal	240	—	ns
tWCS	Inactive time for SPI_CS_B signal	600	—	ns
tSET	Data setup time for SPI_MOSI signal	10	—	ns
tHOLD	Data hold time for SPI_MOSI signal	10	—	ns
tDDLY	Setup time for SPI_MISO signal (transition out of high-z state)	—	50	ns

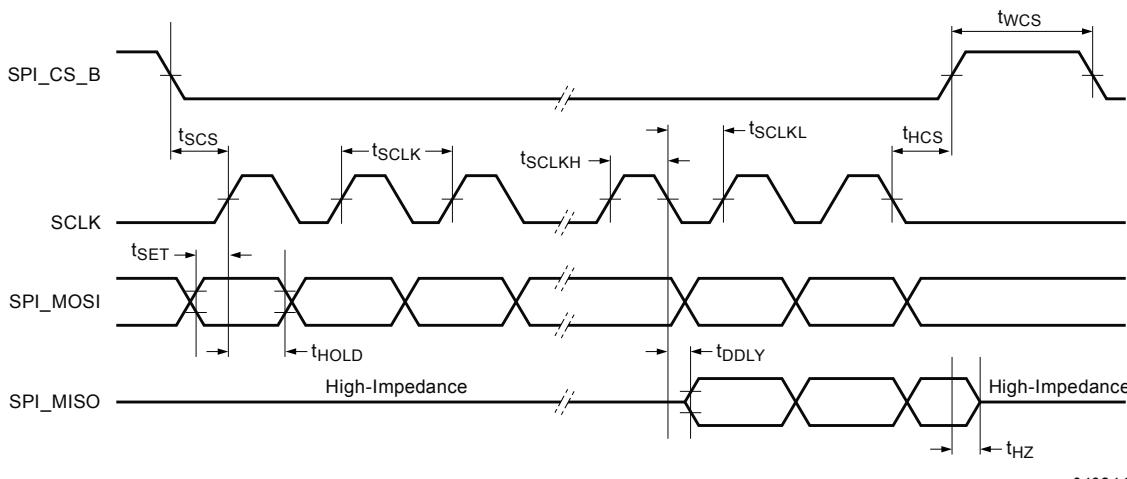Figure 15. SPI timing diagram (4-wire mode)


10.6

SPI timing specifications (software enabled 3-wire mode)

Table 14 and Figure 16 specify and illustrate the minimum and maximum timing parameter values for correct SPI interface functionality when FXLS8971CF is operated in 3-wire (software enabled) SPI mode. FXLS8971CF only supports SPI mode '00', corresponding to CPOL = 0, and CPHA = 0. In this mode, the active state of the clock is high and the idle state is low. Data is latched on the rising edge of the clock and propagated on the falling edge. All timing specifications shown in Table 14 were determined under the following conditions: 10 pF capacitor and 1 kΩ pull-up resistor present on all SPI signals, 105 °C, 1.8 V.


Note:

When FXLS8971CF is operated in 3-wire SPI mode - by setting **SENS_CONFIG1[SPI_M]** = 1 - the **SPI_CS_B** pin is always placed in a high impedance (high-z) state, with the **SPI_MISO** pin output driver disabled (tri-stated).

Table 14. Secondary timing values

Label	Description	Specifications		Unit
		Min.	Max.	
fSCLK	SCLK frequency	0	4	MHz
tSCLK	SCLK Period	250	—	ns
tSCLKH	SCLK high time	100	—	ns
tSCLKL	SCLK low time	100	—	ns
tSCS	Setup time for SPI_CS_B signal	125	—	ns
tHCS	Hold time for SPI_CS_B signal	240	—	ns
tHZ	Hold time for SPI_DATA signal transition back to high-impedance state	—	25	ns
tWCS	Inactive time for SPI_CS_B signal	600	—	ns
tSET	Data setup time for SPI_DATA signal	10	—	ns
tHOLD	Data hold time for SPI_DATA signal	10	—	ns
tDDLY	Data setup time for SPI_DATA signal (output phase)	—	50	ns

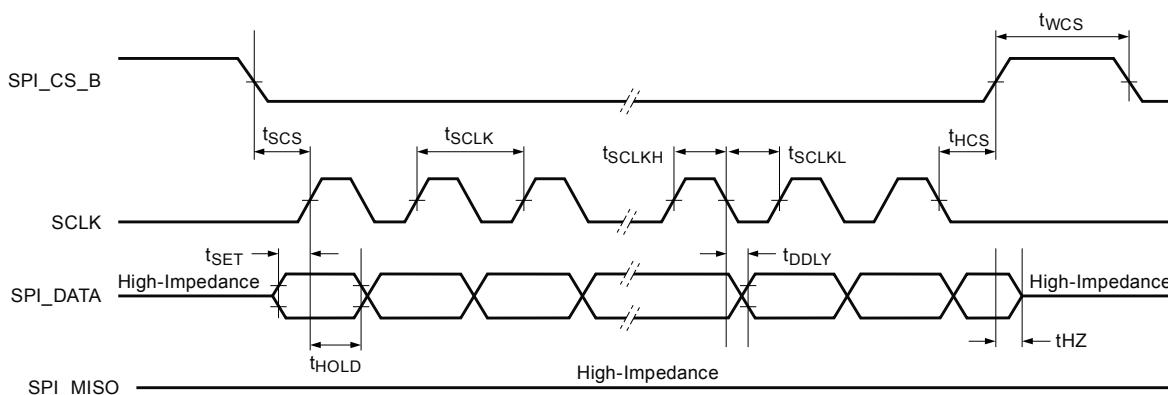Figure 16. SPI timing diagram (3-wire mode)



aaa-040845

11 Operating modes

Table 15. FXLS8971CF operating modes descriptions

Mode ⁽¹⁾	I ² C/SPI bus state	V _{DD}	Description
OFF	Unavailable	< 1.71 V	<p>Communication with FXLS8971CF is not possible, but communications with other devices on the same I²C/SPI bus is possible provided the V_{DD} supply pin is left floating/unconnected and not connected to GND.</p> <p>If V_{DD} is not left floating/unconnected, the ESD protection diodes on the interface pins could become forward biased and clamp the bus, preventing normal operation.</p> <p>As soon as the supply reaches 1.71 V, the device BOOT process begins.</p>
BOOT	Unavailable	≥ 1.71 V	<p>BT_MODE = GND:</p> <p>In this phase, the device is initialized and any default configuration parameters are loaded from OTP memory. When this phase is complete, the SRC_BOOT bit is set and a T_{PULSE-BOOT1} μs pulse may be signaled on either one of the INT1/2 pins (defaults enabled on the INT1 pin after POR).</p> <p>BT_MODE = V_{DD}:</p> <p>In this phase, the device is initialized and any default configuration parameters are loaded from OTP memory, along with any default Motion Detection function specific parameters. When the default configuration parameters are loaded from OTP memory, the SRC_BOOT bit is set and a boot pulse, T_{PULSE-BOOT2}, can be signaled on the INT2 pin. By default, the boot pulse is routed to INT2 pin and cannot be routed to INT1 pin.</p>
Hibernate ⁽²⁾	Unavailable	≥ 1.71 V	<p>The wake-up detection circuit is active, but all other analog and digital blocks are disabled to minimize the current drawn on the V_{DD} pin. I²C and SPI interfaces are not available, and all previously written register settings are lost.</p> <p>BT_MODE = GND:</p> <p>The host must toggle the SPI_CS_B / WAKE-UP pin (low-to-high or high-to-low) in order to initiate a transition back into Standby mode before attempting communications with the device. The host must wait T_{BOOT1} ms for the boot process to complete.</p> <p>BT_MODE = V_{DD}:</p> <p>The INT1/MOT_DET pin is set high (level sensitive) through an external pull-up resistor; the device then exits Hibernate mode and starts the BOOT process. The host must wait T_{BOOT2} ms for the boot process to complete and the motion detection process to begin. Communication with the device over the I²C or SPI interfaces is possible after the BOOT process completes.</p>
Standby	Available	≥ 1.71 V	<p>Sensor and analog blocks are disabled; I²C and SPI interfaces are available.</p>
Active ^{(3) (4)} (WAKE/SLEEP)	Available	≥ 1.71 V	<p>Sensor and analog blocks are enabled when needed (power cycled). I²C and SPI interfaces are available.</p> <p>BT_MODE = GND:</p> <p>FXLS8971CF can automatically transition between the Active SLEEP and WAKE sub-modes when activity/inactivity is detected. Setting ASLP_COUNT ≥ 1 enables the Auto-WAKE/SLEEP mode.</p> <p>BT_MODE = V_{DD}:</p> <p>The Auto-WAKE/SLEEP function is not typically used in this mode (defaults to disabled), but the host may enable Auto-WAKE/SLEEP by configuring it through the register interface.</p>
Active ⁽⁵⁾ (EXT_TRIGGER)	Available	≥ 1.71 V	<p>All blocks are enabled when needed (power cycled). I²C and SPI interfaces are able to respond to read and write commands.</p> <p>BT_MODE = GND:</p> <p>SENS_CONFIG4[INT2_FUNC] = 1</p>

Mode ⁽¹⁾	I ² C/SPI bus state	V _{DD}	Description
			<p>FXLS8971CF automatically transitions between EXT_TRIG and Active mode upon receiving a trigger signal (low-to-high transition) on the EXT_TRIG/INT2 pin. Once the measurement cycle has completed, FXLS8971CF automatically transitions back to the EXT_TRIG state and waits for the next trigger event.</p> <p>BT_MODE = V_{DD}:</p> <p>External trigger mode is not available; SENS_CONFIG4 [INT2_FUNC] shall not be written to with any value other than 0.</p>

1. All register contents are preserved when transitioning from Active to Standby mode. Some registers are reset when transitioning from Standby to Active. The behavior of all registers is noted in [Table 20](#).
2. Exiting Hibernate mode causes all register settings to initialize to their default values. Entering Hibernate mode is equivalent to removing the V_{DD} supply; the device state, sensor data, and host programmed register contents are lost when this mode is entered.
3. The SLEEP and WAKE modes are Active measurement modes. For more information on how to use the SLEEP and WAKE modes and how to transition between these modes, see [Table 16](#).
4. The SLEEP and WAKE modes each feature independent power mode and ODR settings for the HPM and LPM modes. FPM may also be independently enabled for either WAKE or SLEEP modes, allowing for user programmable idle times and measurement decimation factors. These features allow for the creation of custom ODRs and also realizing the optimal trade-off between resolution (noise) and power dissipation in a given application or use case.
5. The EXT_TRIG mode may be used to synchronize the collection of acceleration and temperature data with an external system, or to create custom ODRs using an MCU output compare/PWM/GPIO pin.

Figure 17. Operating modes transition diagram

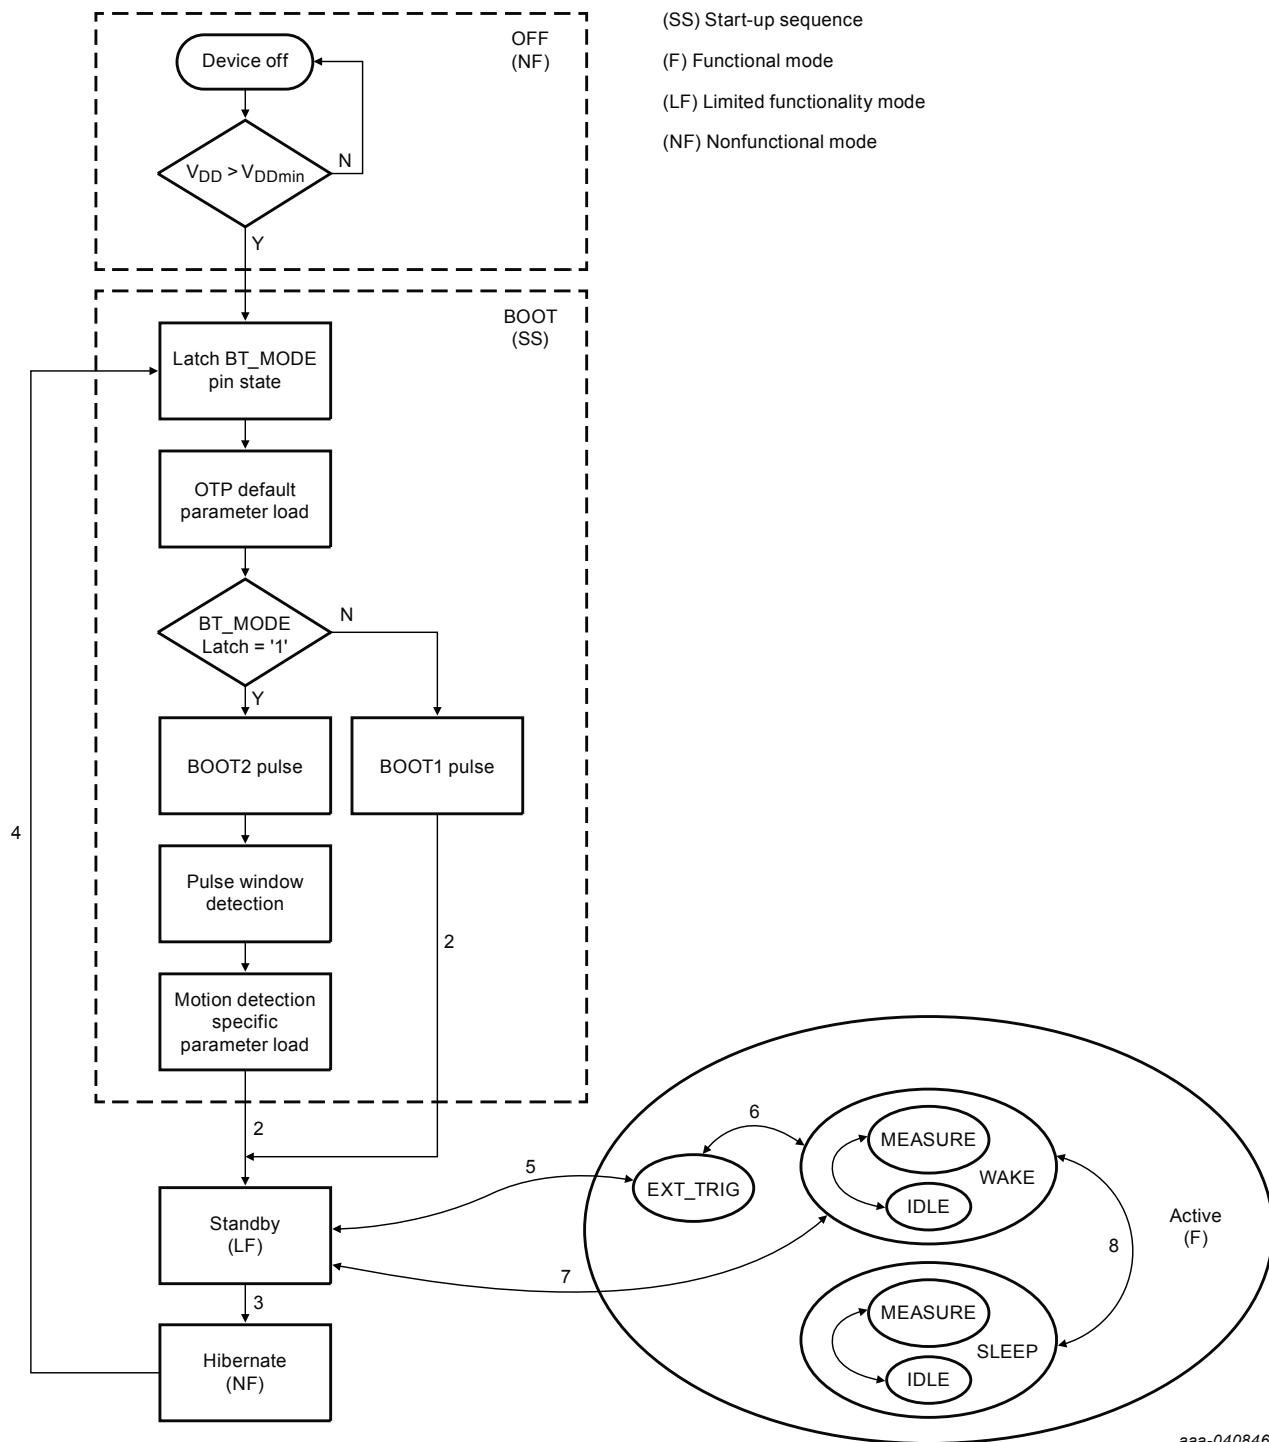


Table 16. Operating modes transition criteria

Callout	Current mode	Next mode	Transition criteria
1	OFF	BOOT	Apply $V_{DD} \geq V_{DD\min}$
2	BOOT	Standby	<p>BOOT_MODE = GND: Wait T_{BOOT1} ms after applying $V_{DD} \geq V_{DD\min}$; FXLS8971CF enters Standby mode and waits for I²C/SPI commands.</p> <p>BT_MODE = V_{DD}: Wait T_{BOOT2} ms after setting the INT1 / MOT_DET pin high. FXLS8971CF automatically transitions into WAKE (SENS_CONFIG1[ACTIVE] bit is automatically set, see callout 7).</p>
3	Standby	Hibernate	<p>BOOT_MODE = GND: Set SENS_CONFIG5[HIBERNATE_EN] = 1; the device may then be woken up only by toggling the SPI_CS_B / WAKE_UP pin.</p> <p>BOOT_MODE = V_{DD}: The host MCU drives the MOT_DET pin low for $\geq T_{MOT-HIB}$ ms to enter Hibernate mode. The device remains in Hibernate mode as long as the MOT_DET pin remains low. ⁽¹⁾</p>
4	Hibernate	BOOT	<p>BT_MODE = GND: The host MCU must toggle the SPI_CS_B / WAKE_UP pin</p> <p>BT_MODE = V_{DD}: FXLS8971CF exits Hibernate mode and begins the BOOT sequence when the MOT_DET pin is pulled high.</p>
5	Standby	EXT_TRIGGER	<p>BT_MODE = GND: Enable the EXT_TRIGGER input function by setting SENS_CONFIG4[INT2_FUNC] = 1.</p> <p>BT_MODE = V_{DD}: The EXT_TRIGGER function is not available when BT_MODE = V_{DD}; this transition is not possible</p>
	EXT_TRIGGER	Standby	<p>BT_MODE = GND: Disable the EXT_TRIGGER input function by setting SENS_CONFIG4[INT2_FUNC] = 0.</p> <p>BT_MODE = V_{DD}: The EXT_TRIGGER function is not available when BT_MODE = V_{DD}; this transition is not possible</p>
6	EXT_TRIGGER	WAKE	<p>BT_MODE = GND: To initiate an ADC conversion, signal a low to high state transition on the INT2/ EXT_TRIGGER pin.</p> <p>BT_MODE = V_{DD}: The EXT_TRIGGER function is not available when BT_MODE = V_{DD}; this transition is not possible</p>
	WAKE	EXT_TRIGGER	<p>BT_MODE = GND: FXLS8971CF automatically returns to the EXT_TRIGGER state once the previously triggered measurement has completed.</p> <p>BT_MODE = V_{DD}: The EXT_TRIGGER function is not available when BT_MODE = V_{DD}; this transition is not possible</p>
7	Standby	WAKE	<p>BT_MODE = GND: Set SENS_CONFIG1[ACTIVE] = 1</p> <p>BT_MODE = V_{DD}:</p>

Callout	Current mode	Next mode	Transition criteria
			The SENS_CONFIG1[ACTIVE] bit is set automatically after the BOOT process completes when the INT1/MOT_DET pin is held high. The host may also manually set this bit using the I ² C or SPI interfaces to resume motion detection mode after changing the device configuration (after entering Standby mode from WAKE mode via register command)
7	WAKE	Standby	BT_MODE = GND: Set SENS_CONFIG1[ACTIVE] = 0 BT_MODE = V_{DD}: The SENS_CONFIG1[ACTIVE] bit clears automatically when the INT1/MOT_DET pin is brought low for $\geq T_{MOT_HIB}$ ms; The host may also manually clear this bit using the I ² C or SPI interfaces in order to change the default device configuration.
8	WAKE	SLEEP	When ASLP_CNT $\geq 1, the device transitions to the SLEEP mode when none of the configured AWS interrupt sources clear the Auto-Wake/Sleep timer before it expires (host programmed ASLP_CNT value is reached), allowing the device to conserve energy by automatically using a lower ODR and/or power (performance) mode.$
	SLEEP	WAKE	One or more of the configured AWS event sources triggers the exit from SLEEP mode and entry into WAKE.

1. *The host may also set **SENS_CONFIG5[HIBERNATE_EN]** = 1 to enter Hibernate mode, but a logic state transition on the **SPI_CS_B / WAKE_UP** pin does not cause the device to exit Hibernate mode when **BT_MODE = V_{DD}**.*

Figure 18. BOOT2 sequence and One-wire motion-detection protocol diagram (BT_MODE = V_{DD})

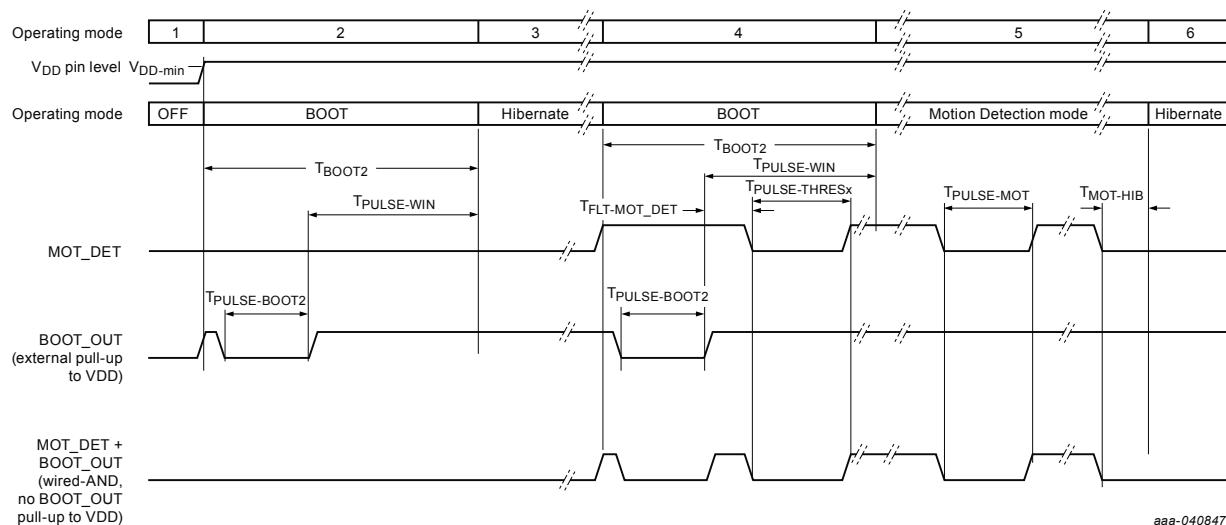



Table 17. BOOT2 sequence and One-wire motion protocol phase descriptions

Protocol phase	Description
1	V_{DD} supply is not present ($V_{DD} < V_{DD_{min}}$); MCU and FXLS8971CF are both OFF; all IO pins are floating/high-Z.
2	$V_{DD} \geq V_{DD_{min}}$; MCU and FXLS8971CF are turned on; FXLS8971CF performs the BOOT sequence. During this phase, the MOT_DET input and BOOT_OUT open-drain output functions are enabled. FXLS8971CF turns on the BOOT_OUT output for $T_{PULSE-BOOT2}$ ms. <i>Note:</i> <i>The BOOT_OUT pulse is not observable in the wired-AND configuration as it is assumed the host MCU has not yet enabled the pull-up resistor on the MOT_DET and BOOT_OUT pins (one pull-up resistor for both pins).</i>
3	If the MCU has not yet asserted the MOT_DET pin, FXLS8971CF enters Hibernate mode directly after the BOOT sequence. During this phase, FXLS8971CF MOT_DET pin input function remains enabled, waiting for the MOT_DET pin to go high, which triggers an exit from this mode.
4	The MCU asserts the MOT_DET pin high by enabling the pull-up; FXLS8971CF exits Hibernate mode and performs the BOOT sequence. Anytime within $T_{PULSE-WIN}$ ms after the BOOT_OUT pulse rising edge (measured from the VOL point), the host MCU may pulse the MOT_DET line low to signal the desired motion detection threshold selection. If no pulse is seen within this window, the default $T_{PULSE-THRES0}$ threshold value is used. The available pulse selections are shown in Table 18. The pulse is only recognized if it begins and ends within the $T_{PULSE-WIN}$ ms period after the BOOT_OUT pulse rising edge, and also conforms to the min and max values as shown in Table 18. If an invalid pulse width is observed, it is ignored and the default threshold value used instead.
5	Motion detection phase: FXLS8971CF continually scans for motion at the preconfigured ODR. If the motion threshold and debounce criteria are met, a $T_{PULSE-MOT}$ ms pulse is signaled on the MOT_DET pin (Open-Drain output is turned on). During this phase, the host may also communicate with FXLS8971CF over the I ² C or SPI interfaces.
6	Hibernate mode: When motion detection is no longer needed, the host MCU drives MOT_DET low forcing FXLS8971CF into Hibernate mode to conserve power. FXLS8971CF delays the entry into Hibernate mode for $T_{MOT-HIB}$ ms after the MOT_DET pin is brought low to debounce the line.

Table 18. One-wire motion protocol threshold selections

Selection	Min pulse (μs)	Nom pulse (μs)	Max pulse (μs)	Upper threshold counts (mg) ⁽¹⁾	Lower threshold counts (mg) ⁽¹⁾
$T_{PULSE-THRES0}$ (default)	—	0	—	64 (125)	-64 (-125)
$T_{PULSE-THRES1}$	562.5	625	883	32 (62)	-32 (-62)
$T_{PULSE-THRES2}$	1125	1250	1570	96 (187)	-96 (-187)
$T_{PULSE-THRES3}$	2250	2500	2950	128 (250)	-128 (-250)

1. Threshold mg values assume the default ± 4 g FSR is used (sensitivity of 1.95 mg/LSB, typical)

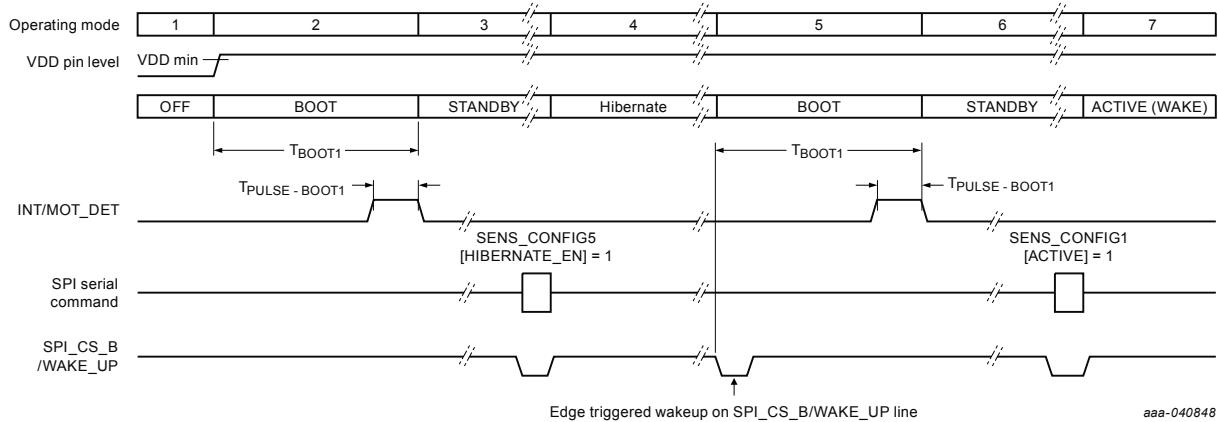Figure 19. BOOT1 sequence (BT_MODE = GND)

Table 19. BOOT1 sequence description (BT_MODE = GND)

Protocol phase	Description
1	V_{DD} supply is not present ($V_{DD} < VDD_{min}$); MCU and FXLS8971CF are both off; all IO pins are floating/high-z.
2	$V_{DD} \geq VDD_{min}$; MCU and FXLS8971CF are turned on; FXLS8971CF performs the BOOT sequence and provides the BOOT_OUT output pulse for $T_{PULSE-BOOT1}$ ms.
3	FXLS8971CF enters standby mode directly after the BOOT sequence.
4	When the MCU sends a serial command to set SENS_CONFIG5[HIBERNATE_EN] bit to 1, FXLS8971CF enters Hibernate mode. NOTE: The device enters into Hibernate mode 1us (typ) after the SPI_CS_B line is de-asserted for the corresponding HIBERNATE_EN serial command.
5	To wake up the device from Hibernate mode, the MCU toggles the SPI_CS_B/WAKE UP pin (see $T_{FLT-WAKE_UP}$ deglitch filter time for transition out of Hibernate mode); FXLS8971CF performs the BOOT sequence and provides the BOOT_OUT output pulse for $T_{PULSE-BOOT1}$ ms.
6	FXLS8971CF enters standby mode directly after the BOOT sequence.
7	When the MCU sends a serial command to set SENS_CONFIG1[ACTIVE] bit to 1, FXLS8971CF enters active mode.

12 Register descriptions

12.1 Complete register map

Table 20. Register address map

Name	Type	Register Address	Auto-increment Address		Default Values BT_MODE = GND/[V _{DD}]	Comment
			F_READ = 0	F_READ = 1		
INT_STATUS ^{(1) (2)}	R	00h	01h/02h/04h/06h/08h/0Ch/0Eh/10h		01h	Interrupt and system status event flags.
TEMP_OUT ⁽¹⁾	R	01h	02h/04h/06h/08h/0Ch/0Eh/10h		—	Temperature output data – temp_out[7:0]. When SENS_CONFIG2[AINC_TEMP] = 0 the auto-increment mechanism skips this register.
VECM_LSB ^{(1) (3)}	R	02h	03h	04h/06h/08h/0Ch/0Eh/10h	—	12-bit unsigned vector magnitude LSB/MSB: VECM[7:0] (LSB) when SENS_CONFIG2[LE_BE] = 0, and VECM[11:4] (MSB) when SENS_CONFIG2[LE_BE] = 1. This register is skipped over by the auto-increment mechanism when SENS_CONFIG5[VECM_EN] = 0.
VECM_MSB ^{(1) (3)}	R	03h	04h/06h/08h/0Ch/0Eh/10h		—	12-bit unsigned vector magnitude MSB/LSB: VECM[11:8] (MSB) when SENS_CONFIG2[LE_BE] = 0, and VECM[3:0] (LSB) when SENS_CONFIG2[LE_BE] = 1. This register is skipped over by the auto-increment mechanism when SENS_CONFIG5[VECM_EN] = 0.
OUT_X_LSB ^{(1) (3)}	R	04h	05h	06h/08h/00h	—	LSB/MSB of current 12-bit X-axis accelerometer output data – x_data_out[7:0] when SENS_CONFIG2[LE_BE] = 0 and x_data_out[11:4] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[X_DIS] = 1, this register is skipped over by the auto-increment mechanism.
OUT_X_MSB ^{(1) (3)}	R	05h	06h/08h/00h		—	MSB/LSB of current 12-bit X-axis accelerometer output data – x_data_out[11:8] when SENS_CONFIG2[LE_BE] = 0 and x_data_out[3:0] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[X_DIS] = 1, this register is skipped over by the auto-increment mechanism.
OUT_Y_LSB ^{(1) (3)}	R	06h	07h	08h/00h	—	LSB/MSB of current 12-bit Y-axis accelerometer output data – y_data_out[7:0] when SENS_CONFIG2[LE_BE] = 0 and y_data_out[11:4] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[Y_DIS] = 1, this register is skipped over by the auto-increment mechanism.
OUT_Y_MSB ^{(1) (3)}	R	07h	08h/00h		—	MSB/LSB of current 12-bit Y-axis accelerometer output data – y_data_out[11:8] when SENS_CONFIG2[LE_BE] = 0 and y_data_out[3:0] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[Y_DIS] = 1, this register is skipped over by the auto-increment mechanism.
OUT_Z_LSB ^{(1) (3)}	R	08h	09h	00h	—	LSB/MSB of current 12-bit Z-axis accelerometer output data – z_data_out[7:0] when SENS_CONFIG5[LE_BE] = 0 and z_data_out[11:4] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[Z_DIS] = 1, this register is skipped over by the auto-increment mechanism.
OUT_Z_MSB ^{(1) (3)}	R	09h	00h		—	MSB/LSB of current 12-bit Z-axis accelerometer output data – z_data_out[11:8] when SENS_CONFIG2[LE_BE] = 0 and z_data_out[3:0] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[Z_DIS] = 1, this register is skipped over by the auto-increment mechanism.
Reserved registers						
RESERVED_REG1	—	0Ah	0Bh		00h	Factory reserved register address 1
Output Buffer Configuration and Status						
BUF_STATUS ⁽¹⁾⁽²⁾	R	0Bh	0Ch/0Eh/10h		00h	Buffer watermark and overflow status flags; stored sample count (buf_cnt[5:0])
BUF_X_LSB ^{(1) (3) (4)}	R	0Ch	0Dh	0Eh/10h/0Ch	—	Head/Tail sample of output buffer X-axis LSB - buf_x_out[7:0] when SENS_CONFIG2[LE_BE] = 0 and buf_x_out[11:4] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[X_DIS] = 1, this register is skipped over by the auto-increment mechanism.
BUF_X_MSB ^{(1) (3) (4)}	R	0Dh	0Eh/10h/0Ch		—	Head/Tail sample of output buffer X-axis MSB - buf_x_out[11:8] when SENS_CONFIG2[LE_BE] = 0 and buf_x_out[3:0] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[X_DIS] = 1, this register is skipped over by the auto-increment mechanism.
BUF_Y_LSB ^{(1) (3) (4)}	R	0Eh	0Fh	10h/0Ch/0Eh	—	Head/Tail sample of output buffer Y-axis LSB - buf_y_out[7:0] when SENS_CONFIG2[LE_BE] = 0 and buf_y_out[11:4] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[Y_DIS] = 1, this register is skipped over by the auto-increment mechanism.
BUF_Y_MSB ^{(1) (3) (4)}	R	0Fh	10h/0Ch/0Eh		—	Head/Tail sample of output buffer Y-axis MSB - buf_y_out[11:8] when SENS_CONFIG2[LE_BE] = 0 and buf_y_out[3:0] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[Y_DIS] = 1, this register is skipped over by the auto-increment mechanism.

Name	Type	Register Address	Auto-increment Address		Default Values BT_MODE = GND/[V _{DD}]	Comment
			F_READ = 0	F_READ = 1		
BUF_Z_LSB ^{(1) (3) (4)}	R	10h	11h	0Ch/0Eh/10h	—	Head/Tail sample of output buffer Z-axis LSB - buf_z_out[7:0] when SENS_CONFIG2[LE_BE] = 0 and buf_z_out[11:4] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[Z_DIS] = 1, this register is skipped over by the auto-increment mechanism.
BUF_Z_MSB ^{(1) (3) (4)}	R	11h	0Ch/0Eh/10h	—	—	Head/Tail sample of output buffer Z-axis MSB - buf_z_out[11:8] when SENS_CONFIG2[LE_BE] = 0 and buf_z_out[3:0] when SENS_CONFIG2[LE_BE] = 1. When SENS_CONFIG5[Z_DIS] = 1, this register is skipped over by the auto-increment mechanism.
Device identification						
PROD_REV	R	12h	13h	14h	Product revision number in BCD format [maj.min] with range 1.0 to 9.9	
WHO_AM_I ⁽¹⁾	R	13h	14h	83h	8-bit unique sensor product ID.	
System status register						
SYS_MODE ^{(1) (2)}	R	14h	15h	00h/[01h]	Current system operating mode, buffer gate error flag, and buffer gate error sample count	
Device configuration and control registers						
SENS_CONFIG1 ^{(1) (5)}	R/W	15h	16h	00h/[03h]	Full-scale range selection, self-test axis, and polarity selection, soft reset, Active mode enable.	
SENS_CONFIG2 ^{(1) (5)}	R/W	16h	17h	00h	WAKE and SLEEP power mode selections, little/big endian output mode, auto-increment control, fast read enable.	
SENS_CONFIG3 ^{(1) (5)}	R/W	17h	18h	00h/[C0h]	WAKE and SLEEP mode ODR and decimation selections	
SENS_CONFIG4 ^{(1) (5)}	R/W	18h	19h	01h	Auto-WAKE/SLEEP interrupt source enable bits, interrupt output pin logic polarity, and driver type, external trigger input function enable	
SENS_CONFIG5 ^{(1) (5)}	R/W	19h	1Ah	00h/[00h]	Auto-increment mechanism disable bits for X/Y/Z axis data; Hibernate mode enable	
WAKE_IDLE_LSB ^{(1) (5)}	R/W	1Ah	1Bh	00h	LSB of 12-bit user programmable WAKE mode idle time - wake_idle[7:0]	
WAKE_IDLE_MSB ^{(1) (5)}	R/W	1Bh	1Ch	00h	MSB of 12-bit user programmable WAKE mode idle time - wake_idle[11:8]	
SLEEP_IDLE_LSB ^{(1) (5)}	R/W	1Ch	1Dh	00h	LSB of 12-bit user programmable SLEEP mode idle time - sleep_idle[7:0]	
SLEEP_IDLE_MSB ^{(1) (5)}	R/W	1Dh	1Eh	00h	MSB of 12-bit user programmable SLEEP mode idle time - sleep_idle[11:8]	
ASLP_COUNT_LSB ^{(1) (5)}	R/W	1Eh	1Fh	00h	LSB of inactivity time-out count value used for transitioning into Auto-SLEEP mode: aslp_count[7:0]. In order to enable the Auto-WAKE/SLEEP feature, the value written to this register must be ≥ 1 .	
ASLP_COUNT_MSB ^{(1) (5)}	R/W	1Fh	20h	00h	MSB of inactivity time-out count value used for transitioning into Auto-SLEEP mode: aslp_count[11:8]	
INT_EN ^{(1) (5)}	R/W	20h	21h	00h/[20h]	Interrupt output enable register	
INT_PIN_SEL ^{(1) (5)}	R/W	21h	22h	00h	Interrupt output routing register (INT1, INT2 pins)	
Zero-g offset compensation registers						
OFF_X ^{(1) (5)}	R/W	22h	23h	00h	X-Axis acceleration zero-g offset: x_off[7:0]	
OFF_Y ^{(1) (5)}	R/W	23h	24h	00h	Y-Axis acceleration zero-g offset: y_off[7:0]	
OFF_Z ^{(1) (5)}	R/W	24h	25h	00h	Z-Axis acceleration zero-g offset: z_off[7:0]	
Output Buffer Configuration						
RESERVED_REG2	—	25h	26h	00h	Factory reserved register address 2	
BUF_CONFIG1 ^{(1) (5)}	R/W	26h	27h	00h	Output data buffer operating mode, trigger source selection, and data collection mode.	
BUF_CONFIG2 ^{(1) (5)}	R/W	27h	28h	00h	Output data buffer flush, gate control, and watermark level (buf_wmrk[5:0]). *The BUF_FLUSH bit may be set at any time in either STANDBY, ACTIVE, OR EXT_TRIG modes.	
Orientation detection function configuration and status						
ORIENT_STATUS ^{(1) (2)}	R	28h	29h	00h	Orientation event status	
ORIENT_CONFIG ^{(1) (5)}	R/W	29h	2Ah	80h	Orientation detection function configuration.	
ORIENT_DBCOUNT ^{(1) (5)}	R/W	2Ah	2Bh	00h	Orientation detection change debounce counter	
ORIENT_BF_ZCOMP ^{(1) (5)}	R/W	2Bh	2Ch	44h	Back/Front orientation state change threshold angle.	
ORIENT_THS_REG ^{(1) (5)}	R/W	2Ch	2Dh	84h	Orientation detection state change threshold angle (Portrait/Landscape) and hysteresis settings.	
Sensor data change detection function configuration and status						

Name	Type	Register Address	Auto-increment Address		Default Values BT_MODE = GND/[V _{DD}]	Comment
			F_READ = 0	F_READ = 1		
SDCD_INT_SRC1 ^{(1) (2)}	R	2Dh	2Eh		00h	Sensor Data Change Detection function outside-of-thresholds event flags source register.
SDCD_INT_SRC2 ^{(1) (2)}	R	2Eh	2Fh		00h	Sensor Data Change Detection function within thresholds event flags source register.
SDCD_CONFIG1 ^{(1) (5)}	R/W	2Fh	30h		00h/[38h]	Sensor Data Change Detection function configuration register 1 – Enables event latch and individual axis bits for OT and WT logic function functions.
SDCD_CONFIG2 ^{(1) (5)}	R/W	30h	31h		00h/[D8h]	Sensor Data Change Detection function configuration register 2 – SDCCD function enable, reference values initialization, and update behavior, relative/absolute operating mode selection, debounce counter behavior. <i>Note: Only the REF_UPD bit may be set in Active mode.</i>
SDCD_OT_DBCNT ^{(1) (5)}	R/W	31h	32h		00h/[00h]	Sensor Data Change Detection outside of thresholds condition debounce count value sddc_ot_dbcnt[7:0]
SDCD_WT_DBCNT ^{(1) (5)}	R/W	32h	33h		00h/[00h]	Sensor Data Change Detection within thresholds condition debounce count value – sddc_wt_dbcnt[7:0]
SDCD_LTHS_LSB ^{(1) (5)}	R/W	33h	34h		00h/[C0h]	Sensor Data Change Detection lower threshold value LSB - sddc_lths[7:0]
SDCD_LTHS_MSB ^{(1) (5)}	R/W	34h	35h		00h/[0Fh]	Sensor Data Change Detection lower threshold value MSB - sddc_lths[11:8]
SDCD_UTHS_LSB ^{(1) (5)}	R/W	35h	36h		00h/[40h]	Sensor Data Change Detection upper threshold value LSB - sddc_uths[7:0]
SDCD_UTHS_MSB ^{(1) (5)}	R/W	36h	37h		00h/[00h]	Sensor Data Change Detection upper threshold value MSB - sddc_uths[11:8]
SELF_TEST_CONFIG1 ^{(1) (5)}	R/W	37h	38h		00h	Self-Test Idle phase duration:
SELF_TEST_CONFIG2 ^{(1) (5)}	R/W	38h	39h		00h	Self-Test measurement phase decimation factor
reserved register 12	R/W	39h	3Ah		00h	Factory reserved register; do not modify
reserved register 13 ⁽¹⁾	R	3Ah	00h		—	Factory reserved register

1. Register contents are preserved when a transition from ACTIVE to STANDBY mode occurs. All register contents are lost when a transition from Hibernate mode or a POR/BOR event occurs.
2. Register contents are reset when a transition from STANDBY to ACTIVE or EXT_TRIG mode occurs.
3. The byte order and L/R justification of these registers is user programmable between little-endian right justified and big-endian (left justified) modes. The default mode is little-endian, right justified. The byte order and justification is controlled by **SENS_CONFIG3[LE_BE]**.
4. The output data buffer contents become obsolete whenever a transition from STANDBY-to-ACTIVE or STANDBY-to-EXT_TRIG modes occurs.
5. Register contents can only be modified while the device is in STANDBY mode; the only exceptions are the **SENS_CONFIG1[ACTIVE]**, **SENS_CONFIG1[RST]** and **BUF_CONFIG1[BUF_FLUSH]** bits that may be set at any time in STANDBY, ACTIVE, or EXT_TRIG modes. The ACTIVE bit state cannot be modified while in EXT_TRIG operating mode.

12.2 Data and status read registers

12.2.1 INT_STATUS register (address 00h)

Table 21. INT_STATUS register (address 00h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	SRC_DRDY	SRC_OVF	SRC_BUF	SRC_SDCD_OT	SRC_SDCD_WT	SRC_ORIENT	SRC_AS LP	SRC_BOOT
Reset	0	0	0	0	0	0	0	1
Access	R	R	R	R	R	R	R	R

Table 22. INT_STATUS register (address 00h) bit description

Field	Description
7 SRC_DRDY	<p>Output data-ready event flag</p> <p>0: A new set of XYZ acceleration and temperature data is not available. 1: A new set of XYZ acceleration and temperature data is available</p> <p>Notes</p> <ul style="list-style-type: none"> The SRC_DRDY flag is cleared whenever one or more of the VECM, and OUT_X/Y/Z registers are read. Whenever BUF_CONFIG1[BUF_MODE1:0] > 00b (buffer enabled), SRC_DRDY is held at logic '0'. When BT_MODE=GND, SRC_DRDY bit and the signaled interrupt are cleared whenever one or more of the VECM, and OUT_X/Y/Z registers are read. When BT_MODE=V_{DD}, SRC_DRDY bit is cleared whenever one or more of the VECM, and OUT_X/Y/Z registers are read. However the data ready interrupt is signaled for T_{PULSE-MOT} seconds (5 ms typ) and it clears itself automatically. The current data ready interrupt pulse is terminated when the device transitions into STANDBY mode before its completion and therefore may not span for entire T_{PULSE-MOT} seconds.
6 SRC_OVF	<p>Output data overflow event flag</p> <p>0: No overflow condition detected. 1: A new set of XYZ acceleration and temperature output data latches into OUT_X/Y/Z and TEMP_OUT registers before the previous set is completely read by the host.</p> <p>Notes</p> <ul style="list-style-type: none"> SRC_OVF is not set if at least one of the OUT_X/Y/Z registers was read before the new data set arrives. Whenever the INT_STATUS register is read, SRC_OVF is cleared. Whenever BUF_CONFIG1[BUF_MODE[1:0]] > 00b (buffer enabled), SRC_OVF is held at logic '0'.
5 SRC_BUF	<p>Output data buffer status event flag</p> <p>0: No output buffer event status flags are active 1: One or more output buffer status event flags are active (BUF_WMRK BUF_OVF BUF_GATE_ERR); reading the BUF_STATUS register provides more information on the BUF_WMRK or BUF_OVF event flags that are currently active. Reading the SYS_MODE register provides information on the BUF_GATE_ERR flag status.</p> <p>Notes</p> <ul style="list-style-type: none"> The SRC_BUF flag is only active when BUF_CONFIG1[BUF_MODE[1:0]] > 00b. The BUF_WMRK event flag will not participate in SRC_BUF interrupt generation in triggered mode (the BUF_WMRK flag is asserted after the buffer is triggered, but it will not signal an external interrupt as with the other buffer operating modes). If it is required to know when the trigger event has taken place, the host may use the SDCD or ORIENT interrupts, as appropriate, to indicate when the buffer is triggered. When the buffer is full, the SRC_BUF flag is set and an external interrupt is signaled on the INT1 or INT2 pins, if configured.
4	SDCD outside of thresholds condition event flag (copy of SDCD_INT_SRC1[OT_EA] flag)

Field	Description
SRC_SDCD_OT	<p>0: SDCD outside of thresholds event is not detected (SDCD_INT_SRC1[OT_EA] = 0).</p> <p>1: SDCD outside of thresholds event is detected (SDCD_INT_SRC1[OT_EA] = 1). The SRC_SDCD_OT event flag is cleared by reading the SDCD_INT_SRC1 register when SDCD_CONFIG1[OT_ELE] = 1, otherwise this flag is cleared automatically by the function when the event condition becomes false.</p>
3 SRC_SDCD_WT	<p>SDCD within thresholds condition event flag (copy of SDCD_INT_SRC2[WT_EA] flag)</p> <p>0: No SDCD within thresholds event has been detected (SDCD_INT_SRC2[WT_EA] = 0).</p> <p>1: An SDCD within thresholds event has been detected (SDCD_INT_SRC2[WT_EA] = 1). The SRC_SDCD_WT event flag is cleared by reading the SDCD_INT_SRC2 register when SDCD_CONFIG1[WT_ELE] = 1, otherwise the function clears this flag automatically when the event condition becomes false.</p>
2 SRC_ORIENT	<p>Orientation change event flag</p> <p>The SRC_ORIENT flag is asserted whenever the ORIENT_STATUS[NEW_ORIENT] bit is asserted and a change in orientation has been detected.</p> <p>Reading the ORIENT_STATUS register clears this event flag.</p> <p>0: An orientation change event has not occurred</p> <p>1: An orientation change event has occurred.</p>
1 SRC_AS LP	<p>Auto-WAKE/SLEEP event status flag</p> <p>0: A WAKE-to-SLEEP or SLEEP-to-WAKE system operating mode transition has not occurred.</p> <p>1: A WAKE-to-SLEEP or a SLEEP-to-WAKE system operating mode transition has occurred.</p> <p>Reading the SYS_MODE register allows the host processor to determine if the transition direction was from WAKE-to-SLEEP or SLEEP-to-WAKE:</p> <ul style="list-style-type: none"> A WAKE-to-SLEEP transition is observed when no configured interrupt event occurs for a time period (number of ODR periods) that equals the user-specified inactivity time limit programmed in the ASLP_COUNT_LSB and ASLP_COUNT_MSB registers. On expiry of configured time period with no user specified activity, the system transitions to the user-specified SLEEP power mode (SENS_CONFIG2[sleep_pm]) and ODR (or decimation and idle time settings when Flexible Performance mode is selected). A SLEEP-to-WAKE transition occurs when a configured interrupt event flag becomes active. The interrupt event flag transitions to the user-specified WAKE power mode (SENS_CONFIG2[wake_pm]) and ODR (or decimation and idle time settings when Flexible Performance mode is selected). <p>Notes</p> <ul style="list-style-type: none"> The SRC_AS LP event flag is cleared by reading the SYS_MODE register. The SRC_AS LP event flag is enabled when ASLP_COUNT \geq 1 which also enables the Auto-WAKE/SLEEP function. The SRC_AS LP flag is only operational when INT_EN[ALSP_EN] = 1.
0 SRC_BOOT	<p>System boot complete event flag</p> <p>0: Boot sequence in process/not complete.</p> <p>1: Boot sequence completed; FXLS8971CF is now ready to accept commands over the I²C or SPI interfaces.</p> <p>This flag is automatically set to 1 upon completion of the boot process and remains set until a POR, soft reset, or exit from Hibernate mode event occurs.</p> <p>When BT_MODE = GND: Boot interrupt is generated in INT1/MOT_DET pin by default. This event flag may be configured to generate an interrupt on either the INT1 or INT2 pin depending on the mapping selected in INT_PIN_SEL. When this event flag is enabled as an interrupt output, either the INT1 or INT2 (depending on the setting made in INT_PIN_SEL register) pin is pulsed once with a width of T_{BOOT1} μs when the boot process completes.</p> <p>When BT_MODE = V_{DD}: The INT2/BOOT_OUT pin is pulsed once with a duration of T_{BOOT2} ms when the boot process completes. The pulse is active low (open-drain output); an external pull-up resistor is required.</p> <p>Notes</p> <ul style="list-style-type: none"> When BT_MODE = GND, after a POR or exiting Hibernate mode, the polarity of the BOOT pulse is default Active High because any I²C write to the SENS_CONFIG4[INT_POL] fails until the boot process has completed.

Field	Description
	<ul style="list-style-type: none"> After a Soft Reset, the INT_POL, INT_PP_OD, and INT_PIN_SEL register settings are not reset and maintain their previous values. As a result, an I²C or SPI write to the SENS_CONFIG4[(INT_PP_OD and INT_POL bits)] and INT_PIN_SEL[BOOT_INT2] bits before the Soft Reset determines the logic polarity, output driver type, and INT1/2 pin mapping of the subsequent Boot pulse. It is not possible to observe the state of the SRC_BOOT bit at '0' over the I²C or SPI interfaces as read and write operations fails until the boot process has completed.

12.2.2 TEMP_OUT register (address 01h)

Table 23. TEMP_OUT register (address 01h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	TEMP_OUT[7:0]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

The **TEMP_OUT** register contains the 8-bit, 2's complement temperature value. When this register contains the value 00h, the measured temperature is 25 °C (typ). This register is updated on every ODR cycle.

12.2.3 VECM_LSB register (address 02h)

This register contains the LSB of the 12-bit, unsigned vector magnitude result (acceleration vector modulus); The result is only calculated when **SENS_CONFIG5**[VECM_EN] = 1.

Note: Whenever the VECM_LSB or VECM_MSB registers are read the SRC_DRDY event flag is also cleared.

The byte order of the vector magnitude output data is programmable via **SENS_CONFIG2**[LE_BE] and defaults to little-endian mode.

Table 24. VECM_LSB register (address 02h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	VECM[7:0]							
Reset	0	0	0	0	0	0	0	0
Access	R	R	R	R	R	R	R	R

Table 25. VECM_LSB register (address 02h) bit description

Field	Description
7 to 0 VECM[7:0]	LSB of the 12-bit unsigned acceleration vector modulus result

12.2.4 VECM_MSB register (address 03h)

This register contains the MSB of the 12-bit, unsigned vector magnitude result (acceleration vector modulus); The result is only calculated when **SENS_CONFIG5[VECM_EN]** = 1.

Note: Whenever the VECM_LSB or VECM_MSB registers are read the SRC_DRDY event flag is also cleared.

The byte order of the vector magnitude output data is programmable via **SENS_CONFIG2[LE_BE]** and defaults to little-endian mode.

Table 26. VECM_MSB register (address 03h) bit allocation

Bit	7	6	5	4	3	2	1	0				
Name	—	—	—	—	VECM[11:8]							
Reset	0	0	0	0	0	0	0	0				
Access	R	R	R	R	R	R	R	R				

Table 27. VECM_MSB register (address 03h) bit description

Field	Description
3 to 0 VECM[11:8]	MSB of the 12-bit unsigned acceleration vector modulus result

12.2.5 OUT_X_LSB, OUT_X_MSB, OUT_Y_LSB, OUT_Y_MSB, OUT_Z_LSB, OUT_Z_MSB registers (addresses 04h to 09h)

These registers contain the 12-bit X-axis, Y-axis, and Z-axis output acceleration data in 2's complement format.

The output data is latched into the **OUT_X/Y/Z** registers along with the assertion of the **SRC_DRDY** event flag.

When **SENS_CONFIG2[F_READ]** = 1, the auto-increment mechanism skips the MSB registers in a burst read transaction. This operation shortens the output data size from 6 bytes to 3 bytes per XYZ sample read.

The byte order of the output data is programmable via **SENS_CONFIG2[LE_BE]** and defaults to little-endian mode.

When **SENS_CONFIG2[F_READ]** = 1, the MSB of each axis's data is stored at the LSB address, regardless of the setting made in **SENS_CONFIG2[LE_BE]**.

In little-endian mode, the output data registers are arranged with the LSB of each axis's data stored at the lower address. The upper nibble (MSB) is stored at the next address, in right justified format. In little-endian mode, the MSB is sign extended to form a 16-bit 2's complement value.

In big-endian mode (**SENS_CONFIG2[LE_BE]** = 1), the output data registers are arranged with the MSB of each axis's data stored at the lower register address. The lower nibble is stored at the next address, and is left justified. The big-endian option allows a big-endian processor to directly read the output data into an array without the need to perform byte swaps. The host software must right shift the data by 4 bits (or divide by 16) in order to obtain the correct scaling of the output data. *The sign extension of the data must be done explicitly, depending on the C compiler used.*

Notes

- There is a ~40 µs delay between the ADC acquisitions of the accelerometer X, Y, Z, and temperature data. The temperature data is acquired first, followed by the X, Y, and Z axes acceleration data. All data is latched into the output registers at the same time instant, coincident with the **SRC_DRDY** event flag being asserted. Whenever any of the **OUT_X/Y/Z** registers is read the **SRC_DRDY** event flag is cleared.
- SX means sign extension, which is the logic level of the most significant bit of the 12-bit **OUT_X/Y/Z** register data, also known as **OUT_X/Y/Z[11]**.

Table 28. OUT_X_LSB and OUT_X_MSB register (addresses 04h to 05h) with **SEN_CONFIG2[LE_BE]** = 0 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OUT_X[7:0]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	OUT_X[11:8]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

Table 29. OUT_Y_LSB and OUT_Y_MSB register (addresses 06h to 07h) with **SEN_CONFIG2[LE_BE]** = 0 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OUT_Y[7:0]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	OUT_Y[11:8]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

Table 30. OUT_Z_LSB and OUT_Z_MSB register (addresses 08h to 09h) with SEN_CONFIG2[LE_BE] = 0 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OUT_Z[7:0]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	SX	SX	SX	SX	OUT_Z[11:8]			
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

Table 31. OUT_X_LSB and OUT_X_MSB register (addresses 04h to 05h) with SEN_CONFIG2[LE_BE] = 1 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OUT_X[11:4]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	OUT_X[3:0]				0	0	0	0
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

Table 32. OUT_Y_LSB and OUT_Y_MSB register (addresses 06h to 07h) with SEN_CONFIG2[LE_BE] = 1 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OUT_Y[11:4]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	OUT_Y[3:0]				0	0	0	0
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

Table 33. OUT_Z_LSB and OUT_Z_MSB register (addresses 08h to 09h) with SEN_CONFIG2[LE_BE] = 1 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OUT_Z[11:4]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	OUT_Z[3:0]				0	0	0	0
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

12.2.6

BUF_STATUS register (address 0Bh)

The content stored at this register address depends on whether the output data buffer is enabled or not. When **BUF_CONFIG1[BUF_MODE[1:0]]** = 00b, the output data buffer is disabled and this register always contains the value 00h.

When **BUF_CONFIG1[BUF_MODE[1:0]]** > 00b, the **BUF_STATUS** register content as shown in [Table 34](#) and [Table 35](#).

Table 34. BUF_STATUS register (address 0Bh) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	BUF_WMRK	BUF_OVF	BUF_CNT[5:0]					
Reset	0	0	0	0	0	0	0	0
Access	R	R	R	R	R	R	R	R

Table 35. BUF_STATUS register (address 0Bh) bit description

Field	Description
7 BUF_WMRK	<p>Buffer Watermark Event Flag: 0: The buffer watermark level programmed in BUF_CONFIG2[BUF_WMRK[5:0]] has not been equaled or exceeded 1: The buffer watermark level programmed in BUF_CONFIG2[BUF_WMRK[5:0]] has been equaled or exceeded.</p> <p>This event flag may be cleared in one of the following ways:</p> <ol style="list-style-type: none"> 1. The host must read out enough samples from the output buffer for BUF_STATUS[BUF_CNT[5:0]] to go below the value set in BUF_CONFIG2[BUF_WMRK[5:0]]. 2. The host must flush the buffer by setting BUF_CONFIG2[BUF_FLUSH] = 1. 3. The host must set BUF_CONFIG1[BUF_MODE[1:0]] = 00b to disable the buffer, which also clears its contents. <p>The watermark interrupt may be used to enable an efficient DMA-based transfer of the buffer contents to the host processor. For example, if the watermark level is set at 16 samples and the interrupt is enabled and routed to one of the INT1 or INT2 pins, the event may be used to trigger a single burst read operation of 1 (BUF_STATUS) + (16 samples * 2 bytes/sample * 3 (axes)) = 97 bytes to completely empty the buffer and clear the buffer status flags (when SENS_CONFIG2[F_READ] = 0), or 49 bytes when SENS_CONFIG2[F_READ] = 1.</p> <p><i>Note:</i> <i>Using a DMA operation to handle the burst read operation can allow the processor to sleep or perform other tasks while the required number of samples is collected as a background activity.</i></p>
6 BUF_OVF	<p>Buffer Overflow Event flag: 0: Buffer overflow event has not occurred. The number of samples stored in the buffer is less than or equal to 32 1: Buffer overflow event has occurred</p> <p>To clear this bit, the host must do one of the following:</p> <ol style="list-style-type: none"> 1. At least one sample must be read in order to clear the BUF_OVF flag. 2. Flush the output buffer by setting BUF_CONFIG2[BUF_FLUSH] = 1. 3. Disable the output buffer by setting BUF_CONFIG1[BUF_MODE[1:0]] = 00b, which resets BUF_STATUS[BUF_CNT[5:0]] to zero, but does not clear the buffer contents.
5 to 0 BUF_CNT[5:0]	This field contains the count of the number of acceleration data triplets (samples) currently stored in the output data buffer (from 0-32). If the buffer is full (contains 32 samples), and an additional data triplet is received, the count remains at 32, and the BUF_OVF event flag is asserted.

12.2.7

BUF_X_LSB, BUF_X_MSB, BUF_Y_LSB, BUF_Y_MSB, BUF_Z_LSB, BUF_Z_MSB (addresses 0Ch to 11h)

These registers contain either the buffer Head or Tail output acceleration sample data in 2's complement format. The tail (oldest) sample is stored when the FIFO read out mode is selected, and the head (newest) sample is stored when the LIFO read out mode is selected. **BUF_CONFIG1[BUF_TYPE]** controls the read out mode.

The byte order of the output data is programmable via **SENS_CONFIG2[LE_BE]**, and defaults to little-endian mode.

In little-endian mode, the output data buffer registers are arranged with the LSB of each axes data stored at the lower address. The upper nibble (MSB) is stored at the next address, and is right justified. In little-endian mode, the buffer output data is also sign extended to avoid the need for the host software to do sign extension of the output data on a per sample (per axis) basis.

In big-endian mode (with **SENS_CONFIG2[LE_BE]** = 1), the output buffer data registers are arranged with the MSB of each axis data stored at the lower register address. The lower nibble(LSB) is stored at the next address, and is left justified. The lower 4 bits of the LSB are always read as '0'. The host software must right shift the data by 4 bits (or divide the value by 16) in order to obtain the correct scaling of the acceleration data.

If **SENS_CONFIG2[F_READ]** = 1, the auto increment mechanism skips over the MSB registers. This operation shortens the output data size from 6 bytes to 3 bytes per XYZ sample. When **SENS_CONFIG2[F_READ]** = 1, the MSB of each axes data is stored at the LSB address, regardless of the setting made in **SENS_CONFIG2[LE_BE]**. The output data size may also be reduced using the X/Y/Z_DIS bits located in the **SENS_CONFIG5** register. These bits can be used to selectively disable each axis from being read out using the auto-increment mechanism. For example, setting X_DIS causes the auto-increment mechanism to skip over the **BUF_X** LSB and MSB registers, thereby shortening the number of bytes to be read from 6 to 4, or from 3 to 2 when F_READ = 1.

Note:

*Reading the **BUF_STATUS** register is not required in order to clear the **BUF_WMRK** event flag - if the host has mapped more than the **BUF_WMRK** event flag to the same interrupt pin, the **BUF_STATUS** register should be used to confirm that a **BUF_WMRK** event was the source of the interrupt before initiating the burst read operation.*

Table 36. BUF_X_LSB and BUF_X_MSB registers (addresses 0Ch, 0Dh) with SENS_CONFIG2[LE_BE] = 0 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	BUF_X[7:0]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	BUF_X[11:8]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

Table 37. BUF_Y_LSB and BUF_Y_MSB registers (addresses 0Eh, 0Fh) with SENS_CONFIG2[LE_BE] = 0 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	BUF_Y[7:0]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	BUF_Y[11:8]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

Table 38. BUF_Z_LSB and BUF_Z_MSB registers (addresses 10h, 11h) with SENS_CONFIG2[LE_BE] = 0 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	BUF_Z[7:0]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	SX	SX	SX	SX	BUF_Z[11:8]			
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

Table 39. BUF_X_LSB and BUF_X_MSB registers (addresses 0Ch, 0Dh) with SENS_CONFIG2[LE_BE] = 1 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	BUF_X[11:4]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	BUF_X[3:0]				0	0	0	0
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

Table 40. BUF_Y_LSB and BUF_Y_MSB registers (addresses 0Eh, 0Fh) with SENS_CONFIG2[LE_BE] = 1 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	BUF_Y[11:4]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	BUF_Y[3:0]				0	0	0	0
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

Table 41. BUF_Z_LSB and BUF_Z_MSB registers (addresses 10h, 11h) with SENS_CONFIG2[LE_BE] = 1 bit allocation

Bit	7	6	5	4	3	2	1	0
Name	BUF_Z[11:4]							
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R
Bit	7	6	5	4	3	2	1	0
Name	BUF_Z[3:0]				0	0	0	0
Reset	—	—	—	—	—	—	—	—
Access	R	R	R	R	R	R	R	R

12.2.8 PROD_REV register (address 12h)

The register contains the product revision number. The revision number is stored in BCD format, as MAJ.MIN with a range from 1.0 to 9.9, with the initial silicon revision reporting revision 1.0 (10h).

Table 42. PROD_REV register (address 12h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	PROD_REV_MAJ[3:0]						PROD_REV_MIN[3:0]	
Reset	0	0	0	1	0	1	0	0
Access	R	R	R	R	R	R	R	R

Table 43. PROD_REV register (address 12h) bit description

Field	Description
7 to 4 PROD_REV_MAJ[3:0]	Product revision info, major product revision value with range 1 to 9 in BCD format.
3 to 0 PROD_REV_MIN[3:0]	Product revision info, minor product revision value with range 0 to 9 in BCD format.

12.2.9 WHO_AM_I register (address 13h)

This register contains the unique sensor product identifier and is factory programmed to 83h for FXLS8971CF.

Table 44. WHO_AM_I register (address 13h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	WHO_AM_I[7:0]							
Reset	1	0	0	0	0	0	1	1
Access	R	R	R	R	R	R	R	R

12.2.10 SYS_MODE register (address 14h)

The **SYS_MODE** register indicates the current device operating mode. Applications using the Auto-WAKE/SLEEP mechanism should use this register to synchronize their application with FXLS8971CF operating mode transitions. This register also indicates the status of the buffer gate error flag and the buffer gate count.

Table 45. SYS_MODE register (address 14h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	BUF_GA TE_ERR	BUF_GATE_CNT[4:0]					SYS_MODE[1:0]	
Reset (BT_MODE = GND)	0	—	—	—	—	—	0	0
Reset (BT_MODE = V_{DD})	0	—	—	—	—	—	0	1
Access	R	R	R	R	R	R	R	R

Table 46. SYS_MODE register (address 14h) bit description

Field	Description
7 BUF_GATE_ERR	<p>Buffer gate error flag: 0: A buffer gate error has not been detected 1: A buffer gate error was detected.</p> <p>If BUF_CONFIG1[BUF_GATE] = 1 and the output buffer is not emptied before the arrival of the next XYZ acceleration sample, the BUF_GATE_ERR flag is asserted. The BUF_GATE_ERR flag remains asserted as long as the output buffer remains un-emptied.</p> <p>The BUF_GATE_ERR flag may be cleared in one of the following ways:</p> <ol style="list-style-type: none"> 1. Reading out the entire contents of the output buffer such that BUF_STATUS[BUF_CNT[5:0]] = 0. 2. Flushing (clearing) the output buffer contents by setting BUF_CONFIG2[BUF_FLUSH] = 1. 3. Disabling the output buffer by setting BUF_CONFIG1[BUF_MODE[1:0]] = 00b, which clears BUF_CNT. 4. Transitioning FXLS8971CF from Standby to Active mode.
6 to 2 BUF_GATE_CNT[4:0]	<p>The BUF_GATE_CNT field contains the number of OOR periods that have elapsed since the BUF_GATE_ERR flag was asserted.</p> <p>This buf_gate_cnt field is reset to 0 after any of the following actions:</p> <ol style="list-style-type: none"> 1. The host reads out the entire contents of the output buffer such that BUF_STATUS[BUF_CNT[5:0]] = 0. 2. The host flushes (clears) the output buffer by setting BUF_CONFIG2[BUF_FLUSH] = 1. 3. Disable the output buffer by setting BUF_CONFIG1[BUF_MODE[1:0]] = 00b, which also clears the buffer contents. 4. Transitioning FXLS8971CF from Standby to Active mode. which also clears the buffer contents.
1 to 0 SYS_MODE[1:0]	<p>The current system operating mode</p> <p>00b: Standby mode (default mode after a POR or soft reset event when BT_MODE = GND)</p> <p>01b: WAKE mode (default mode after a POR or soft reset event when BT_MODE = V_{DD} and MOT_DET = 1)</p> <p>10b: SLEEP mode</p> <p>11b: EXT_TRIG mode (this mode is unavailable when BT_MODE = V_{DD})</p>

Field	Description	
Notes	<ul style="list-style-type: none">When external trigger mode is enabled (with SENS_CONFIG4[INT2_FUNC] = 1), while the device is waiting for a trigger event to occur, SYS_MODE[1:0] is set to 11b. When the trigger is received, SYS_MODE[1:0] is set to 01b while the measurement is being made, and then change back to 11b and remain there until the next trigger signal is received.When INT_EN[WAKE_OUT_EN] = 1, and SYS_MODE[1:0] = 01b (WAKE), the device outputs either a logic '1' or '0' on either the INT1 or INT2 pins, depending on the settings made in INT_PIN_SEL[WAKE_OUT_INT2] and SENS_CONFIG4[INT_POL].When entering the WAKE, SLEEP, or EXT_TRIG modes, the internal debounce counters for the ORIENT, SDCD_WT, and SDCD_OT event functions are automatically reset.	

12.3 Sensor main configuration registers

12.3.1 SENS_CONFIG1 register (address 15h)

Table 47. SENS_CONFIG1 register (address 15h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	RST	ST_AXIS_SEL[1:0]	ST_POL	SPI_M		FSR[1:0]		ACTIVE
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	0	0	0	0	0	0	1	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 48. SENS_CONFIG1 register (address 15h) bit description

Field	Description	
7 RST	<p>The RST bit may be used to initiate a software reset. The reset mechanism can be triggered in Standby, Active (WAKE or SLEEP), and EXT_TRIG operating modes. When the RST bit is set, the boot mechanism resets all functional blocks and loads the internal registers with their default values (The INT_POL, INT_PP_OD, and BOOT_DIS bits are not reset and maintains their current values as long as power is not removed from the V_{DD} pin and Hibernate mode is not enabled). The host application should allow T_{BOOT1} or T_{BOOT2} ms between issuing a reset command and attempting communications with FXLS8971CF over the I²C/SPI interfaces. Alternatively, the host can wait for the active edge on the T_{BOOT1/2} pulse event signaled on the configured INTx pin.</p> <p>0: No device reset pending 1: Write '1' to trigger the soft reset sequence</p> <p>Notes</p> <ul style="list-style-type: none"> <i>The I²C and SPI interface blocks are also reset to avoid corrupted data transactions.</i> <i>The reset sequence does not start until the host I²C controller issues the SP (stop) condition, or the SPI primary releases the SPI_CS_B pin.</i> <i>The host always reads back this bit as '0'.</i> <i>There is a delay of 300 µs to 500 µs between setting the RST bit and the commencement of the reset sequence.</i> 	
6 to 5 ST_AXIS_SEL[1:0]	<p>Self-test axis selection</p> <p>This bit field selects the transducer axis to test using the Self-Test function. The ST_POL bit allows either positive or negative self-test displacements to be applied.</p> <p>The host system may use the self-test function to verify the functionality of both the transducer and signal measurement chain without the need to apply an external acceleration stimulus.</p> <p>Notes</p> <ul style="list-style-type: none"> <i>The data output from the two axes that are not selected by ST_AXIS_SEL during the self-test sequence are not meaningful and should be ignored.</i> <i>It is recommended to minimize the communication traffic on the device serial interface during the measurement phase in order to reduce the susceptibility of the self-test response signal to induced noise. It is strongly recommended to operate the self-test in interrupt mode.</i> <p>00b: (default): Self-test function is disabled 01b: Self-test function is enabled for X-axis 10b: Self-test function is enabled for Y-axis 11b: Self-test function is enabled for Z-axis</p>	
4 ST_POL	<p>Self-test displacement polarity</p> <p>0 (default): Proof mass displacement for the selected axis is in the positive direction. 1: Proof mass displacement for the selected axis is in the negative direction.</p>	
3 SPI_M	<p>SPI interface mode selection; selects between 3- and 4-wire operating modes for the SPI interface:</p> <p>0 (default): 4-wire interface mode is selected 1: 3-wire interface mode is selected</p>	

Field	Description	
	Notes	<ul style="list-style-type: none"><i>The state of this bit is only relevant when the SPI interface mode is selected (INTF_SEL = V_{DD}).</i><i>When INTF_SEL = V_{DD} and SPI_M = 1, the SDA/SPI_MOSI pin becomes the bidirectional SPI_DATA pin; the SA0/MISO pin is unused and placed in a high-impedance state.</i><i>4-wire mode is selected by default after a POR/BOR event or when exiting Hibernate mode.</i><i>If INTF_SEL = V_{DD} and the SPI_MOSI and SPI_MISO lines are directly connected together on the PCB, 3-wire SPI mode is enabled regardless of the setting of this bit</i>
2 to 1 FSR[1:0]	Full-scale measurement range (FSR) selection 00b: ± 2 g; 0.98 mg/LSB (1024 LSB/g) nominal sensitivity 01b (default): ± 4 g; 1.95 mg/LSB (512 LSB/g) nominal sensitivity 10b: ± 8 g; 3.91 mg/LSB (256 LSB/g) nominal sensitivity 11b: ± 16 g; 7.81 mg/LSB (128 LSB/g) nominal sensitivity	
0 ACTIVE	Standby/Active mode selection This bit selects between Standby mode and Active mode. Note: <ul style="list-style-type: none"><i>When INT2_FUNC = 1, the Active bit becomes read only via the I²C or SPI interface as the INT2 pin logic state directly controls the device operating mode. The INT2_FUNC may only be enabled (set to 1) when ACTIVE = 0. Similarly, the ACTIVE bit may only be set if INT2_FUNC = 0.</i>	<p>0: FXLS8971CF is placed in Standby mode and draws the minimum amount of current on the V_{DD} pin (I_{DD-STBY}). Standby mode is the default mode after a POR or soft reset event.</p> <p>1: FXLS8971CF is placed in Active mode and draws an I_{DD} corresponding to the selected ODR in HPM, the selected ODR in LPM, or the user-selected decimation and idle time settings in FPM.</p>

12.3.2 SENS_CONFIG2 register (address 16h)

Table 49. SENS_CONFIG2 register (address 16h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	WAKE_PM[1:0]		SLEEP_PM[1:0]		LE_BE	—	AINC_TEMP	F_READ
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 50. SENS_CONFIG2 register (address 16h) bit description

Field	Description
7 to 6 WAKE_PM[1:0]	<p>WAKE power mode selection</p> <p>00b: Low-power mode is selected; SENS_CONFIG3[7:4] bits are interpreted as WAKE_ODR[3:0] and sets the ODR and decimation factor as per Table 52. WAKE and SLEEP low-power mode ODR and decimation settings .</p> <p>01b: High performance mode is selected; SENS_CONFIG3[7:4] bits are interpreted as WAKE_ODR[3:0] and set the ODR and decimation factor as per Table 53. WAKE and SLEEP High Performance mode ODR and decimation settings .</p> <p>1xb: Flexible performance mode is selected; SENS_CONFIG3[7:4] bits are interpreted as WAKE_DEC[3:0], which sets the measurement decimation factor. The effective ODR (and measurement current) is determined by the combination of the decimation factor and the 12-bit measurement idle time programmed in the WAKE_IDLE_MSB and WAKE_IDLE_LSB registers. See Table 54. WAKE and SLEEP decimation settings in Flexible Power mode for the selectable decimation factors.</p> <p><i>Note:</i> <i>In motion detection mode with BT_MODE=V_{DD}, use of HPM or FPM mode is not advised. Only the default LPM mode should be used.</i></p>
5 to 4 SLEEP_PM[1:0]	<p>SLEEP power mode selection</p> <p>00b: Low-power mode is selected; SENS_CONFIG3[3:0] bits are interpreted as SLEEP_ODR[3:0] and sets the ODR and decimation factor as per Table 52. WAKE and SLEEP low-power mode ODR and decimation settings .</p> <p>01b: High performance mode is selected; SENS_CONFIG3[3:0] bits are interpreted as SLEEP_ODR[3:0] and set the ODR and decimation factor as per Table 53. WAKE and SLEEP High Performance mode ODR and decimation settings .</p> <p>1xb: Flexible performance mode is selected; SENS_CONFIG3[3:0] bits are interpreted as SLEEP_DEC[3:0], which sets the measurement decimation factor. The effective ODR (and measurement current) is determined by the combination of the decimation factor and the 12-bit measurement idle time programmed in the SLEEP_IDLE_MSB and SLEEP_IDLE_LSB registers. See Table 54. WAKE and SLEEP decimation settings in Flexible Power mode for the selectable decimation factors.</p> <p><i>Note:</i> <i>In motion detection mode with BT_MODE=V_{DD}, use of HPM or FPM mode is not advised. Only the default LPM mode should be used.</i></p>
3 LE_BE	<p>Little/Big-endian output mode selection</p> <p>0: Little-endian output mode is selected; the output data LSBs are stored at the lower logical address and the MSBs (nibbles) are right-justified.</p> <p>1: Big-endian output mode is selected; the output data MSBs are stored at the lower logical address and the LSBs (nibbles) are left justified.</p> <p><i>Note:</i> <i>The output data format selection applies only to the data read from the OUT_X/Y/Z, VECM, and BUF_X/Y/Z registers. All other multi-byte fields within the device are fixed in little-endian right justified format.</i></p>
1 AINC_TEMP	<p>Temperature output data auto-increment control</p> <p>0 (default): TEMP_OUT register content is not included in auto-increment address range.</p> <p>1: TEMP_OUT register content is included in auto-increment address range.</p>
0 F_READ	Fast-read mode selection

Field	Description
	<p>When this bit is set, the output data format is limited to the most significant byte of the 12-bit sample. The MSB data is always stored in the lower address, regardless of the setting made in SENS_CONFIG1[LE_BE]. The auto-increment address pointer automatically skips over the higher address for each axis' sample when performing a burst read operation of the current output data or buffered data when the F_READ bit is set.</p> <p>0: Normal read mode 1: Fast-read mode</p>

12.3.3 SENS_CONFIG3 register (address 17h)

The SENS_CONFIG3 register is used to set the WAKE and SLEEP ODRs when operating in low-power mode or High Performance Mode, and the decimation factor for WAKE and SLEEP modes in Flexible Power Mode.

Notes

- In motion detection mode with BT_MODE=V_{DD}, use of HPM or FPM mode is not advised. Only the default LPM mode should be used.*
- When BT_MODE=V_{DD}, maximum recommended ODR is 100 Hz. When the data ready interrupt is enabled, the interrupt line (INT1) will pulse low for TPULSE-MOT seconds (5 ms typ) for every ODR period. Therefore, for higher ODRs, the host does not observe DRDY interrupt pulse at every ODR period.*

Table 51. SENS_CONFIG3 register (address 17h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	WAKE_ODR[3:0] / WAKE_DEC[3:0]				SLEEP_ODR[3:0] / SLEEP_DEC[3:0]			
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	1	1	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

In HPM and LPM modes, a decimation factor is implicit, as specified in [Table 52](#) and [Table 53](#), respectively.

In FPM, the decimation factor for WAKE and SLEEP modes is specified via the same bit-fields (see [Table 54](#) for the available settings), and along with the WAKE and SLEEP idle time parameter determines the effective ODR.

For example, if **SENS_CONFIG2[WAKE_PM]** = 10b, selecting FPM in the WAKE operating mode, the SENS_CONFIG3 upper nibble is interpreted as the decimation factor for WAKE mode (WAKE_DEC[3:0]) per [Table 54](#). If a value of 0110b is chosen, for example, a decimation factor of 64 is selected. If WAKE_IDLE[11:0] is set to 256 (decimal), the effective ODR would be $1 / ((256+1) * (312.5 \mu s) * 64) = 0.195 \text{ Hz}$.

The effective ODR is determined in a similar manner for the SLEEP operating mode using the SLEEP_DEC[3:0] and the SLEEP_IDLE[11:0] values.

When operating in HPM or LPM with ODR = 3200 Hz, or in FPM with IDLE_TIME = 0, the first data sample is produced after a time delay greater than 1 ODR period using [Eq. \(1\)](#).

$$T_{DELAY}(s) = 0.9984 \times \frac{(DEC - 1)}{ODR \times DEC} + 528.5 \mu s \quad (1)$$

Note:

The IDLE_TIME refers to either WAKE_IDLE[11:0] or SLEEP_IDLE[11:0], depending on current operating mode.

After this initial delay, all subsequent data samples are made available at the ODR rate. For all other operating modes and settings the first sample is produced within 1 ODR period.

Notes

- When the device transitions from WAKE to SLEEP or from SLEEP to WAKE modes there is a 500 μ s (nominal) delay between the last acquisition at the WAKE/SLEEP mode ODR and the first acquisition at the SLEEP/WAKE mode ODR.*
- The ODR may only be changed in Standby mode, with **SENS_CONFIG1[ACTIVE]** = 0 and **SENS_CONFIG4[INT2_FUNC]** = 0.*

Table 52. WAKE and SLEEP low-power mode ODR and decimation settings

ODR[3]	ODR[2]	ODR[1]	ODR[0]	ODR Selection (Hz)	Decimation selection (samples)
0	0	0	0	3200	1
0	0	0	1	1600	1
0	0	1	0	800	1
0	0	1	1	400	1
0	1	0	0	200	1

ODR[3]	ODR[2]	ODR[1]	ODR[0]	ODR Selection (Hz)	Decimation selection (samples)
0	1	0	1	100	1
0	1	1	0	50	1
0	1	1	1	25	1
1	0	0	0	12.5	1
1	0	0	1	6.25	1
1	0	1	0	3.125	1
1	0	1	1	1.563	1
1	1	0	0	0.781	1
1	1	0	1	0.781	1
1	1	1	0	0.781	1
1	1	1	1	0.781	1

Table 53. WAKE and SLEEP High Performance mode ODR and decimation settings

ODR[3]	ODR[2]	ODR[1]	ODR[0]	ODR selection (Hz)	Decimation selection (samples)
0	0	0	0	3200	1
0	0	0	1	1600	2
0	0	1	0	800	4
0	0	1	1	400	8
0	1	0	0	200	16
0	1	0	1	100	32
0	1	1	0	50	64
0	1	1	1	25	128
1	0	0	0	12.5	256
1	0	0	1	6.25	512
1	0	1	0	3.125	1024
1	0	1	1	1.563	2048
1	1	0	0	0.781	4096
1	1	0	1	0.781	4096
1	1	1	0	0.781	4096
1	1	1	1	0.781	4096

Table 54. WAKE and SLEEP decimation settings in Flexible Power mode

DEC[3]	DEC[2]	DEC[1]	DEC[0]	Decimation selection (samples)	Measurement time (ms)
0	0	0	0	1	0.3125
0	0	0	1	2	0.625
0	0	1	0	4	1.25
0	0	1	1	8	2.5

DEC[3]	DEC[2]	DEC[1]	DEC[0]	Decimation selection (samples)	Measurement time (ms)
0	1	0	0	16	5
0	1	0	1	32	10
0	1	1	0	64	20
0	1	1	1	128	40
1	0	0	0	256	80
1	0	0	1	512	160
1	0	1	0	1024	320
1	0	1	1	2048	640
1	1	0	0	4096	1280
1	1	0	1	4096	1280
1	1	1	0	4096	1280
1	1	1	1	4096	1280

12.3.4 SENS_CONFIG4 register (address 18h)

Table 55. SENS_CONFIG4 register (address 18h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	EXT_TRIG_M	WAKE_SD_CD_WT	WAKE_SD_CD_OT	WAKE_ORIENT	DRDY_PUL	INT2_FUNC	INT_PP_OD	INT_POL
Reset	0	0	0	0	0	0	0	1
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 56. SENS_CONFIG4 register (address 18h) bit description

Field	Description
7 EXT_TRIG_M	<p>External trigger function acquisition mode.</p> <p>0 (default): Each positive going trigger edge causes a single ADC acquisition to be made. When the number of acquisitions specified by the current operating mode decimation setting have been triggered, the final decimated output is stored in the OUT_X/Y/Z registers or the buffer depending on the setting made in BUF_CONFIG1[BUF_MODE[1:0]].</p> <p>1: Each positive going trigger edge causes multiple ADC acquisitions. The number of acquisitions are specified by the current operating mode decimation setting ⁽¹⁾. Once the specified number of acquisitions have been made, the final decimated output is stored in the OUT_X/Y/Z registers or the buffer depending on the setting made in BUF_CONFIG1[BUF_MODE[1:0]].</p> <p>Notes</p> <ul style="list-style-type: none"> The EXT_TRIG_M setting only applies when INT2_FUNC = 1. The SRC_DRDY event flag is asserted after the specified number of measurements have completed and the final decimated output result is available. Note that the SRC_DRDY flag is only asserted when BUF_CONFIG1[BUF_MODE[1:0]] = 00b In LPM, this bit has no effect as the decimation factor is fixed at 1.
6 WAKE_SD_CD_WT	<p>SDCD within thresholds event Auto-WAKE/SLEEP transition source enable</p> <p>0 (default): SDCD within thresholds event is not used to prevent entry into/trigger an exit from SLEEP mode.</p> <p>1: SDCD within thresholds event is used to prevent entry into/trigger an exit from SLEEP mode.</p>
5 WAKE_SD_CD_OT	<p>SDCD outside of thresholds event Auto-WAKE/SLEEP transition source enable</p> <p>0 (default): SDCD outside of thresholds event is not used to prevent entry into/trigger an exit from SLEEP mode.</p> <p>1: SDCD outside of thresholds event is used to prevent entry into/trigger an exit from SLEEP mode.</p>
4 WAKE_ORIENT	<p>Orientation change event Auto-WAKE/SLEEP transition source enable</p> <p>0 (default): Orientation change condition is not used as an event to prevent entry into /trigger an exit from SLEEP mode.</p> <p>1: Orientation change condition is used as an event to prevent entry into/trigger an exit from SLEEP mode.</p>
3 DRDY_PUL	<p>Pulse generation option for DRDY event</p> <p>0 (default): A SRC_DRDY event is output on the INTx pin as an active high or active low signal depending on the polarity setting made in INT_POL. The INTx pin remains asserted until the host reads any of the OUT_X/Y/Z registers.</p> <p>1: A 32 μs (nominal) duration pulse is output on the configured INTx pin once per ODR cycle. The output pulse is either positive or negative, depending on the INT_POL setting.</p> <p>Notes</p> <ul style="list-style-type: none"> The pulsed output signal is OR'd with all of the other interrupt events assigned to the INTx pin. In Motion Detection mode (BT_MODE = V_{DD}), the state of this bit is ignored and has no effect on device operation.
2 INT2_FUNC	INT2 output / EXT_TRIG input pin selection

Field	Description
0 (default): INT2/EXT_TRIG pin is configured for the INT2 output function. The logic polarity and output driver type are specified in the INT_POL and INT_PP_OD registers. Interrupt signals are selectively routed to this output pin using the INT_PIN_SEL register. 1: INT2/EXT_TRIG pin is configured as the EXT_TRIG input function. A positive edge (low-to-high) transition on the EXT_TRIG pin is used to trigger either a single measurement of the acceleration and temperature data using the current decimation settings when EXT_TRIG_M = 1 or a single acquisition of the current acceleration and temperature data when EXT_TRIG_M = 0. This function is useful for realizing low frequency or asynchronous ODRs initiated by the host system, for example, by using an MCU timer output pin. When this function is enabled, it is reflected in the SYS_MODE register.	Notes <ul style="list-style-type: none"><i>When the EXT_TRIG function is enabled, any bits set to '1' in the INT_PIN_SEL register (mapping an event flag to the INT2 output pin) are ignored as the pin becomes a dedicated high-impedance input pin for the external trigger function.</i><i>The INT2_FUNC bit setting is ignored when BT_MODE = V_{DD} as the external trigger function is not available in this mode.</i>
1 INT_PP_OD	INT1 and INT2 pins output driver selection 0 (default): INTx output pin driver is push-pull type. 1: INTx output pin driver is open-drain/open-source type. An external pull-up/pull-down resistor is required. Notes <ul style="list-style-type: none"><i>If a user operation sets INT_PP_OD before issuing a soft reset command, the setting is maintained through the reset sequence (only lost when V_{DD} supply is removed or Hibernate mode is enabled).</i><i>The INT_PP_OD bit setting is ignored when BT_MODE = V_{DD} as the INT1/MOT_DET and INT2/BOOT_OUT output driver type is fixed to open-drain.</i>
0 INT_POL	Interrupt logic polarity on INT1 and INT2 pins Selects the polarity of the interrupt output signal on the INT1 and INT2 pins. 0: Active low: interrupt events are signaled with a logical '0' level. If DRDY_PUL=1, a SRC_DRDY event pulse is negative going. The inactive state of the INTx pins is logic '1' (V _{DD}). 1 (default): Active high: interrupt events are signaled with a logical '1' level. If DRDY_PUL=1, a SRC_DRDY event pulse is positive going. The inactive state of the INTx pins is logic '0' (GND). Notes <ul style="list-style-type: none"><i>If a user operation sets INT_POL before issuing a soft reset command, the setting is maintained through the reset sequence (only lost if V_{DD} supply is removed or Hibernate mode is enabled).</i><i>The INT_POL bit setting is ignored when BT_MODE = V_{DD} as the INT1/MOT_DET and INT2/BOOT_OUT interrupt logic polarity is fixed at active low (external pull-up resistors are required).</i>

1. In order to acquire all the measurements specified by the decimation setting, only one trigger event is needed.

Table 57. INTx pin behavior as a function of INT_PP_OD and INT_POL bit settings (valid only when BT_MODE = V_{DD})

INTx pin configuration	INT_PP_OD	INT_POL	INTx pin asserted value	INTx pin deasserted value
CMOS output	0	0	0	1
CMOS output	0	1	1	0
External pull-up resistor added (open-drain)	1	0	0	High-Z ⁽¹⁾
External pull-down resistor added (open source)	1	1	1	High-Z ⁽¹⁾

1. High-Z means high impedance condition, with the state of the INTx pin defined by the external pull-up or pull-down resistor.

Table 58. INTx pin behavior as a function of INT_PP_OD and INT_POL bit settings (valid only when BT_MODE = V_{DD})

INTx pin configuration	INT_PP_OD	INT_POL	INTx pin asserted value	INTx pin deasserted value
External pull-up resistor added (open-drain)	X	X	0	1

12.3.5 SENS_CONFIG5 register (address 19h)

Table 59. SENS_CONFIG5 register (address 19h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	—	—	—	VECM_EN	X_DIS	Y_DIS	Z_DIS	HIBERNATE_EN
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 60. SENS_CONFIG5 register (address 19h) bit description

Field	Description	
4 VECM_EN	Vector Magnitude calculation enable: 0 (default): 12-bit vector magnitude result is not calculated on every ODR cycle. The VECM_LSB and VECM_MSB registers are not included in auto-increment address range. 1: 12-bit vector magnitude result is calculated on every ODR cycle. The VECM_LSB and VECM_MSB registers are included in auto-increment address range. Note: <i>The vector magnitude result may also be used as an input to the SDCD function when SDCD_CONFIG2[MODE] = 1.</i>	
3 X_DIS	X-axis auto-increment disable: 0 (default): X-axis measurement is included in the auto-increment address range for both buffered and non-buffered modes (default). 1: X-axis measurement is excluded from the auto-increment address range.	
2 Y_DIS	Y-axis auto-increment disable: 0 (default): Y-axis measurement is included in the auto-increment address range for both buffered and non-buffered modes (default). 1: Y-axis measurement is excluded from the auto-increment address range.	
1 Z_DIS	Z-axis auto-increment disable: 0 (default): Z-axis measurement is included in the auto-increment address range for both buffered and non-buffered modes (default). 1: Z-axis measurement is excluded from the auto-increment address range.	
0 HIBERNATE_EN	Hibernate mode enable: 0: Hibernate mode not enabled; device is operating per the mode selected in WAKE_PM/SLEEP_PM[1:0] 1: Commands device to enter Hibernate mode; all RAM register contents are lost. Notes <ul style="list-style-type: none"> When BT_MODE = GND: <i>When Hibernate Mode is selected, FXLS8971CF is completely shut down (similar to removing the V_{DD} supply), with all register contents lost. To exit Hibernate Mode, a positive or negative going edge must be applied to the SPI_CS_B/WAKE_UP pin (logic level must toggle from the state applied at the time this bit was set). The host must then wait T_{BOOT1} ms for the part to re-enter Standby mode before attempting communications over the I²C or SPI interfaces.</i> When BT_MODE = V_{DD}: <i>Hibernate mode is automatically entered/exited based on the level input to the MOT_DET pin. The part directly enters Active mode with the preconfigured motion detection settings when MOT_DET is pulled high. The host must wait T_{BOOT2} ms for the boot process to complete and the motion detection process to begin. When MOT_DET is brought low, the part automatically enters Hibernate mode to conserve power.</i> 	

12.3.6 WAKE_IDLE_LSB register (address 1Ah)

This register, along with WAKE_IDLE_MSB, sets the unsigned 12-bit WAKE mode idle time (off time).

Note: *The contents of this register are only meaningful when **SENS_CONFIG2[WAKE_PM[1:0]]** = 1xb.*

The counter period is nominally 312.5 μ s/LSB, providing a range of 312.5 μ s to 1.28 seconds. The idle time + measurement time (set by the WAKE mode decimation factor) forms the measurement period (ODR^{-1}) as described in the [Section 12.3.3: SENS_CONFIG3 register \(address 17h\) register description](#).

Table 61. WAKE_IDLE_LSB register (address 1Ah) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	WAKE_IDLE[7:0]							
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

12.3.7 WAKE_IDLE_MSB register (address 1Bh)

Flexible Power Mode WAKE idle time MSB. The contents of this register are only meaningful when **SENS_CONFIG2[WAKE_PM[1:0]]** = 1xb.

Table 62. WAKE_IDLE_MSB register (address 1Bh) bit allocation

Bit	7	6	5	4	3	2	1	0				
Name	0	0	0	0	WAKE_IDLE[11:8]							
Reset	0	0	0	0	0	0	0	0				
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W				

12.3.8 SLEEP_IDLE_LSB register (address 1Ch)

Flexible Power Mode SLEEP idle time LSB. The contents of this register are only meaningful when **SENS_CONFIG2[SLEEP_PM[1:0]]** = 1xb. This register, along with SLEEP_IDLE_MSB, sets the unsigned 12-bit SLEEP mode idle-time (off-time). The counter time period is 312.5 μ s/LSB, providing a range of 312.5 μ s to 1.28 seconds. The idle time + measurement time (set by the SLEEP mode decimation factor) forms the measurement period (ODR^{-1}).

Table 63. SLEEP_IDLE_LSB register (address 1Ch) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	SLEEP_IDLE[7:0]							
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

12.3.9 SLEEP_IDLE_MSB register (address 1Dh)

Flexible Power Mode SLEEP idle time MSB (nibble). The contents of this register are useful only when **SENS_CONFIG2[SLEEP_PM[1:0]]** = 1xb.

Table 64. SLEEP_IDLE_MSB register (address 1Dh) bit allocation

Bit	7	6	5	4	3	2	1	0				
Name	0	0	0	0	SLEEP_IDLE_TIME[11:8]							
Reset	0	0	0	0	0	0	0	0				
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W				

12.3.10 ASLP_COUNT_LSB, ASLP_COUNT_MSB registers (addresses 1Eh to 1Fh)

The **ASLP_COUNT** value sets the minimum number of ODR periods needed to transition from WAKE to SLEEP mode when no event activity is detected. See [Section 12.3.4: SENS_CONFIG4 register \(address 18h\)](#) for events that may be monitored for inactivity in order to trigger the transition to SLEEP mode when the internal counter reaches the **ASLP_COUNT** value.

The sleep counter period corresponds to the selected WAKE mode ODR period when operating in LPM and HPM, and to the effective ODR set by the WAKE decimation (measurement time) and WAKE idle time (off-time) settings when the device operates in FPM. The auto-WAKE/SLEEP feature is only enabled when the value written to ASLP_CNT is > 0.

SENS_CONFIG2[WAKE_PM] sets the WAKE power mode; **SENS_CONFIG3[WAKE_ODR]** sets the ODR. When operating in Flexible Performance Mode, **SENS_CONFIG3[WAKE_DEC]** and **WAKE_IDLE[11:0]** values set the effective ODR.

SENS_CONFIG2[SLEEP_PM] sets the SLEEP power mode; **SENS_CONFIG3[SLEEP_ODR]** sets the ODR. When operating in Flexible Performance Mode, **SENS_CONFIG3[SLEEP_DEC]** and **SLEEP_IDLE[11:0]** values set the effective ODR.

The functions used to detect inactivity and enter SLEEP mode upon expiry of the **ASLP_COUNT** timer (see [Table 69](#)) are selected in **SENS_CONFIG4** and **BUF_CONFIG2**. The same functions used to enter SLEEP are also used to exit this mode when activity is detected except for the SRC_BUF event flag, which can only be used to prevent/delay a transition from WAKE to SLEEP if the host system is reading data from the buffer (and clearing SRC_BUF). A transition from SLEEP to WAKE mode occurs as soon as one of the enabled detection events becomes active. See [Table 70](#) for the corresponding Interrupt event sources.

Table 65. ASLP_COUNT_LSB register (address 1Eh) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	ASLP_COUNT[7:0]							
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 66. ASLP_COUNT_LSB register (address 1Eh) bit description

Field	Description
7 to 0 ASLP_COUNT [7:0]	LSB of the 12-bit unsigned count value used for inactivity detection. The selected WAKE mode ODR determines the counter period.

Table 67. ASLP_COUNT_MSB register (address 1Fh) bit allocation

Bit	7	6	5	4	3	2	1	0				
Name	—	—	—	—	ASLP_COUNT[11:8]							
Reset	0	0	0	0	0	0	0	0				
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W				

Table 68. ASLP_COUNT_MSB register (address 1Fh) bit description

Field	Description
3 to 0 ASLP_COUNT [11:8]	MSB (nibble) of the 12-bit unsigned count value used for inactivity detection. The selected WAKE mode ODR determines the counter period.

Table 69. ASLP_COUNT timer period

WAKE mode ODR (Hz)	WAKE mode ODR Period (ms)	ASLP_COUNT Period (ms)	Max Inactivity Times
3200	0.3125	0.3125	1.28

WAKE mode ODR (Hz)	WAKE mode ODR Period (ms)	ASLP_COUNT Period (ms)	Max Inactivity Times
1600	0.625	0.625	2.56
800	1.25	1.25	5.12
400	2.5	2.5	10.24
200	5	5	20.48
100	10	10	40.96
50	20	20	81.92
25	40	40	163.84
12.5	80	80	327.68
6.25	160	160	655.36
3.125	320	320	1310.72
1.563	640	640	2621.44
0.781	1280	1280	5242.54

Table 70. Auto-WAKE/SLEEP Interrupt Event Sources

Interrupt Event Source	Event flag can clear auto-sleep timer?	Event flag can transition the device from SLEEP to WAKE mode?
SRC_DRDY	No	No
SRC_OVF	No	No
SRC_BUF	Yes ⁽¹⁾	No
SRC_SDCD_OT	Yes	Yes
SRC_SDCD_WT	Yes	Yes
SRC_ORIENT	Yes	Yes
SRC_ASLP	No ⁽²⁾	No ⁽²⁾
SRC_BOOT	No	No

1. When *BUF_CONFIG2[WAKE_SRC_BUF]* = 1, clearing the SRC_BUF event flag resets the auto-sleep timer and prevent FXLS8971CF from entering SLEEP mode. When *BUF_CONFIG2[WAKE_SRC_BUF]* = 0 (default), FXLS8971CF enters SLEEP mode regardless of the state of the *BUF_WMRK* or *BUF_OVF* event flags.
2. If the *BUF_GATE* bit is set to logic '1', it prevents the output buffer from accepting new data after a WAKE-to-SLEEP or SLEEP-to-WAKE operating mode transition until the host first empties the buffer contents. The *BUF_GATE* bit is useful for preventing acceleration data from different WAKE and SLEEP mode ODRs from being mixed within the buffer.

12.3.11 INT_EN register (address 20h)

This register is used to enable and disable the various interrupt event generators embedded within the device.

Note:

- When $BT_MODE = V_{DD}$, the INT1/MOT_DET pin signals any mapped (and enabled) interrupts with a $T_{PULSE-MOT}$ ms active low pulse (open-drain output with external pull-up).
- Any enabled interrupt is signaled with a $T_{PULSE-MOT}$ ms pulse at the ODR rate until the respective interrupt source flag is cleared.
- The INT2/BOOT_OUT pin only signals the boot process complete interrupt, signaled by a $T_{PULSE-BOOT}$ ms active low pulse (open-drain with external pull-up). Any other interrupt sources mapped to the INT2/BOOT_OUT pin are ignored.

Table 71. INT_EN register (address 20h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	DRDY_EN	BUF_EN	SDCD_O_T_EN	SDCD_W_T_EN	ORIENT_EN	ASLP_EN	BOOT_DIS	WAKE_OUT_EN
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	0	0	1	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 72. INT_EN register (address 20h) bit description

Field	Description
7 DRDY_EN	Data-ready interrupt output enable 0 (default): Interrupt is disabled. 1: Interrupt is enabled and signaled on either the INT1 or INT2 output pins as configured by the setting made in INT_PIN_SEL. Note: When $BT_MODE = GND$, SRC_DRDY bit and the signaled interrupt are cleared whenever one or more of the VECM, and OUT_X/Y/Z registers are read. When $BT_MODE = V_{DD}$, SRC_DRDY bit is cleared whenever one or more of the VECM, and OUT_X/Y/Z registers are read. However the data ready interrupt is signaled for $T_{PULSE-MOT}$'s (5 ms typ) and it clears itself automatically. The current data ready interrupt pulse is terminated when the device transitions into STANDBY mode before its completion and therefore may not span for entire $T_{PULSE-MOT}$ s.
6 BUF_EN	Output data buffer interrupt output enable 0: Interrupt is not routed to the INTx output pins (default) 1: Interrupt is routed to either the INT1 or INT2 output pins as configured by the setting made in INT_PIN_SEL.
5 SDCD_OT_EN	SDCD outside of thresholds interrupt output enable 0 (default): Interrupt is disabled. 1: Interrupt is routed to either the INT1 or INT2 output pin as configured by the setting made in INT_PIN_SEL.
4 SDCD_WT_EN	SDCD within thresholds interrupt output enable 0 (default): Interrupt is disabled. 1: Interrupt is routed to either the INT1 or INT2 output pins as configured by the setting made in INT_PIN_SEL.
3 ORIENT_EN	Orientation interrupt output enable 0 (default): Interrupt is disabled. 1: Interrupt is enabled and signaled on either the INT1 or INT2 output pins as determined by the setting made in INT_PIN_SEL.
2 ASLP_EN	Auto-WAKE/SLEEP interrupt output enable 0 (default): Interrupt is disabled.

Field	Description
	1: Interrupt is enabled and signaled on either the INT1 or INT2 output pins as determined by the setting made in INT_PIN_SEL.
1 BOOT_DIS	<p>Boot interrupt output disable</p> <p>0 (default): Boot interrupt is enabled and routed to either the INT1 or INT2 output pin as determined by the setting made in INT_PIN_SEL. This interrupt is pulsed, with the polarity of the pulse determined by the setting made in SENS_CONFIG4[INT_POL].</p> <p>1: Interrupt is disabled and not routed to the INTx output pins.</p> <p>When BT_MODE = GND:</p> <p>The SRC_BOOT interrupt is signaled on the INTx pin selected in INT_PIN_SEL and pulsed for a duration of $T_{PULSE-BOOT1}$ μs when the BOOT process completes.</p> <p>When BT_MODE = V_{DD}:</p> <p>This bit is ignored and the SRC_BOOT interrupt is internally enabled and mapped to the INT2/BOOT_OUT pin (fixed settings). The INT2/BOOT_OUT pin is pulsed low for a duration of $T_{PULSE-BOOT2}$ ms during the BOOT sequence.</p> <p>Note: <i>The BOOT_DIS bit holds the user programmed value until the V_{DD} supply is removed or Hibernate mode is entered; this setting is, however, maintained across a soft reset operation.</i></p>
0 WAKE_OUT_EN	<p>WAKE power state output enable</p> <p>0 (default): The device does not signal the WAKE operating mode on the INTx output pin.</p> <p>1: The device signals that it is currently in WAKE mode via the INT1 or INT2 pin. Whenever SYS_MODE[sys_mode] = 01b, the INT1 or INT2 pin (as selected in INT_PIN_SEL) is held high or low, depending on the setting made in SENS_CONFIG4[INT_POL]. The logic state is maintained as long as the device remains in WAKE mode. When the device leaves WAKE mode and enters SLEEP or EXT_TRIG mode, the selected interrupt pin assumes the opposite logic state.</p> <p>Note: <i>If the host system is utilizing the WAKE_OUT function to control an external load switch or LDO enable signal, other enabled interrupts should not be mapped to the same pin that is assigned to the WAKE_OUT function in order to prevent unintended operation of the load switch or LDO.</i></p>

12.3.12 INT_PIN_SEL register (address 21h)

This register may be used to control the routing of event flags to either the INT1 or INT2 output pins.

Notes

- When the INT2 pin is configured for the external trigger function, for example, when **SENS_CONFIG4[INT2_FUNC]** = 1, a logic '1' value in any of these bit fields is ignored.
- When **BT_MODE** = **V_{DD}**, the only interrupt that may be mapped to the INT2/BOOT_OUT pin is the SRC_BOOT interrupt; setting any of the other bits in this register to '1' effectively unroutes the respective interrupt source from both the INT1 and INT2 pins.

Table 73. INT_PIN_SEL register (address 21h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	DRDY_INT2	BUF_INT2	SDCD_OT_INT2	SDCD_WT_INT2	ORIENT_IN2	ASLP_INT2	BOOT_INT2	WAKE_OUT_INT2
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 74. INT_PIN_SEL register (address 21h) bit description

Field	Description
7 DRDY_INT2	Data-ready interrupt routing 0: If data-ready interrupt routing is enabled, the interrupt signal is routed to INT1 pin. 1: If data-ready interrupt routing is enabled, the interrupt signal is routed to INT2 pin.
6 BUF_INT2	Output buffer interrupt routing (BUF_OVF BUF_WMRK BUF_GATE_ERR): 0: If output buffer interrupt routing is enabled, the interrupt signal is routed to INT1 pin. (default) 1: If output buffer interrupt routing is enabled, the interrupt signal is routed to INT2 pin.
5 SDCD_OT_INT2	SDCD outside of thresholds event interrupt routing 0: If SDCD outside of thresholds event interrupt routing is enabled, the interrupt signal is routed to INT1 pin. 1: If SDCD outside of thresholds event interrupt routing is enabled, the interrupt signal is routed to INT2 pin.
4 SDCD_WT_INT2	SDCD within thresholds event interrupt routing 0: If SDCD within thresholds event interrupt routing is enabled, the interrupt signal is routed to INT1 pin. 1: If SDCD within thresholds event interrupt routing is enabled, the interrupt signal is routed to INT2 pin.
3 ORIENT_INT2	ORIENT event interrupt routing 0: If ORIENT event interrupt routing is enabled, the interrupt signal is routed to INT1 pin. 1: If ORIENT event interrupt routing is enabled, the interrupt signal is routed to INT2 pin.
2 ASLP_INT2	Auto-WAKE/SLEEP event interrupt routing 0: If Auto-WAKE/SLEEP event interrupt routing is enabled, the interrupt signal is routed to INT1 pin. 1: If Auto-WAKE/SLEEP event interrupt routing is enabled, the interrupt signal is routed to INT2 pin.
1 BOOT_INT2	BOOT event interrupt routing If a user operation sets BOOT_INT2 before issuing a soft reset command, the setting is maintained through the reset sequence (the setting is lost if V_{DD} supply is removed). 0: If BOOT event interrupt routing is enabled, the interrupt signal is routed to INT1 pin. 1: If BOOT event interrupt routing is enabled, the interrupt signal is routed to INT2 pin. Note: When BT_MODE = V_{DD} , this bit is ignored; the BOOT interrupt is internally mapped to the INT2/BOOT_OUT pin (fixed setting).
0 WAKE_OUT_INT2	WAKE power state interrupt routing 0: If WAKE power state interrupt routing is enabled, the WAKE power state output is routed to INT1 pin. 1: If WAKE power state interrupt routing is enabled, the WAKE power state output is routed to INT2 pin.

12.3.13 OFF_X, OFF_Y, OFF_Z registers (addresses 22h to 24h)

Registers 22h to 24h (OFF_X/Y/Z) can be used to realign the zero-g position of the X-, Y-, and Z-axes after PCB assembly. The registers are 8 bit, 2's complement providing an offset adjustment range of -128 to 127.

Eq. (2) determines the effective offset value in mg, set by each of the OFF_X/Y/Z registers. The equation is an X-axis example, with the other axes offsets set in an identical manner.

$$\text{Offset (mg)} = \text{OFF}_X \times \left(2 \times \text{Sensitivity} \left(\frac{\text{mg}}{\text{LSB}}\right)\right) \quad (2)$$

For example, writing the value +16 (10h) into the OFF_X register in the ± 4 g FSR results in an effective X-axis offset of $16 \text{ LSB} \times 2 \times 1.95 \text{ mg/LSB} = 62.4 \text{ mg}$.

Table 75. OFF_X register (addresses 22h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OFF_X[7:0]							
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 76. OFF_Y register (addresses 23h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OFF_Y[7:0]							
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 77. OFF_Z register (addresses 24h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OFF_Z[7:0]							
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

12.3.14 BUF_CONFIG1 register (address 26h)

The BUF_CONFIG1 register controls the output buffer read order, data collection mode and trigger event sources.

Table 78. BUF_CONFIG1 register (address 26h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	BUF_TYPE	BUF_MODE[1:0]		BUF_GATE	TRIG_SDC_D_WT	TRIG_SDC_D_OT	—	TRIG_ORIENT
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 79. BUF_CONFIG1 register (address 26h) bit description

Field	Description
7 BUF_TYPE	<p>Buffer data read out order: 0: First In First Out (FIFO). Default In FIFO mode, the oldest sample data is read out first, followed by the more recent sample data. 1: First In Last Out (LIFO). In LIFO mode, the newest data sample is read out first, followed by the older sample data.</p> <p><i>Note:</i> <i>It is not possible to change the buffer operating mode without first clearing the SENS_CONFIG1[ACTIVE] and SENS_CONFIG4[INT2_FUNC] bits.</i></p>
6 to 5 BUF_MODE[1:0]	<p>Buffer data collection mode: 00: Buffer is disabled. 01: Stream Mode: buffer always contains the most recent 32 samples when overflowed. The oldest sample data is replaced with new data when the buffer becomes full and a new sample arrives. 10: Stop Mode: buffer stops accepting new samples when full. 11: Trigger mode: The buffer will operate in circular mode until the trigger event occurs, collecting up to BUF_CONFIG2[BUF_WMRK[5:0]] samples; after a configured trigger event occurs the buffer continues to accept up to (32- BUF_CONFIG2[BUF_WMRK[5:0]]) samples, set the BUF_OVF flag, and stop collecting further samples. Trigger mode allows acceleration data to be collected both before and after the trigger event, with the maximum number of pre-trigger samples defined by the BUF_CONFIG2[BUF_WMRK[5:0]] setting.</p> <p><i>Note:</i> <i>The BUF_OVF flag is cleared and the triggered mode re-armed once the host flushes or reads all the buffer contents.</i></p> <p>The available trigger sources are the SDCD within- and outside-of-thresholds events, and orientation change event. These trigger sources are enabled in this register via the TRIG_SDCD_WT, TRIG_SDCD_OT, and TRIG_ORIENT bits.</p>
4 BUF_GATE	<p>Output data buffer gate enable: 0: Buffer gate is bypassed (default). Output data buffer is automatically flushed when FXLS8971CF transitions from WAKE to SLEEP or SLEEP to WAKE modes. This operation prevents acceleration data from two different ODRs rates becoming mixed in the output buffer. 1: The Output data buffer input gate is enabled when transitioning from WAKE to SLEEP or SLEEP to WAKE modes; the entire buffer contents must be read out or flushed (BUF_CONFIG2[BUF_FLUSH] = 1) to allow the further collection of sample data. Any new samples that arrive before the buffer has been read out or flushed are discarded, and the BUF_GATE_ERR bit in the SYS_MODE register is asserted. SYS_MODE[BUF_GATE_CNT] maintains a count of the number of samples discarded since the BUF_GATE_ERR flag was asserted.</p> <p>Although FXLS8971CF still transitions from WAKE to SLEEP or SLEEP to WAKE, the contents of the FIFO buffer are preserved, and any new data samples are not stored in the buffer until it is either emptied or flushed by the host application.</p>

Field	Description	
	Notes	<ul style="list-style-type: none"> <i>The BUF_GATE_ERR flag remains asserted as long as the buffer remains unemptied.</i> <i>When triggered buffer mode (BUF_MODE = 11b) is selected and ASLP_COUNT ≥ 1, the BUF_GATE setting is ignored.</i> <i>The BUF_GATE bit in 1: Trigger source is enabled, when set, holds the last data set stored in the buffer before transitioning to the SLEEP or WAKE modes. After the buffer is flushed, FXLS8971CF will start accepting new sample data into the buffer at the current operating mode ODR.</i>
3 TRIG_SDCD_WT	SDCD within thresholds event buffer trigger enable:	<p>0: Trigger source is disabled (default).</p> <p>1: Trigger source is enabled</p>
2 TRIG_SDCD_OT	SDCD outside of thresholds event buffer trigger enable:	<p>0: Trigger source is disabled (default).</p> <p>1: Trigger source is enabled</p>
0 TRIG_ORIENT	Orientation change event buffer trigger enable:	<p>0: Trigger source is disabled (default).</p> <p>1: Trigger source is enabled</p>

The buffer contents are flushed whenever the buffer is disabled (by setting BUF_MODE = 00b), when **BUF_CONFIG2[BUF_FLUSH]** is set, or after an automatic power mode change when transitioning from WAKE-to-SLEEP or SLEEP-to-WAKE with **BUF_CONFIG1[BUF_GATE]** = 0. The buffer contents are also automatically flushed on a transition from STANDBY to ACTIVE or STANDBY to EXT_TRIG mode. The buffer may be prevented from being flushed when transitioning from WAKE-to-SLEEP or SLEEP-to-WAKE by setting **BUF_CONFIG1[BUF_GATE]** = 1.

Disabling the buffer clears the **BUF_STATUS[BUF_OVF]** and **BUF_STATUS[BUF_WMRK]** event flags. Disabling the buffer also clears the **BUF_STATUS[BUF_CNT]** field. The **SYS_MODE[BUF_GATE_ERR]** and **SYS_MODE[buf_gate_cnt]** fields are also reset when the buffer is disabled, flushed, or when the host reads out all the content.

Notes for using triggered operating mode with Auto-WAKE/SLEEP mode enabled:

1. When BUF_MODE = 11b, **ASLP_COUNT** ≥ 1 , and the ACTIVE bit is set, FXLS8971CF immediately enters the WAKE mode. After **ASLP_COUNT** ODR periods, the buffer is flushed and the part enters SLEEP mode. The buffer collects up to **BUF_CONFIG2[BUF_WMRK]** samples at the SLEEP mode ODR before the trigger event occurs (in stream mode).
2. After the trigger event, FXLS8971CF enters WAKE mode and remain there regardless of the setting made in **ASLP_COUNT**, ignore any subsequent triggers, and collects (32 - **BUF_WMRK[5:0]**) samples at the WAKE mode ODR, set the **BUF_OVF** flag, and cease collecting more data until the host flushes the buffer or reads out all of the contents. Once the buffer is emptied or flushed, the triggered mode is re-armed, but FXLS8971CF must first re-enter SLEEP mode (which will happen after **ASLP_COUNT** WAKE ODR periods) before a second set of data can be collected.
3. The **BUF_CONFIG1[BUF_GATE]** setting is ignored and has no effect. The buffer contents are automatically flushed when FXLS8971CF transitions from WAKE to SLEEP.
4. The interrupt events that prevent FXLS8971CF from entering SLEEP mode also prevents the operation of the triggered mode (which requires FXLS8971CF to first enter the SLEEP mode).

12.3.15 BUF_CONFIG2 register (address 27h)

Table 80. BUF_CONFIG2 register (address 27h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	BUF_FLUSH	WAKE_SRC_BUF						BUF_WMRK[5:0]
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 81. BUF_CONFIG2 register (address 27h) bit description

Field	Description
7 BUF_FLUSH	<p>Buffer flush enable:</p> <p>0: No pending buffer flush operation, or buffer flush completed</p> <p>1: Buffer flush enable: all buffer contents and related event flags are cleared. The SYS_MODE[BUF_GATE_ERR] and SYS_MODE[BUF_GATE_CNT[4:0]] fields are also cleared.</p> <p>The BUF_FLUSH bit is self-cleared within one internal clock cycle, and as such is not observable in a logic high state through the I²C or SPI interfaces.</p>
6 WAKE_SRC_BUF	<p>Buffer WAKE-to-SLEEP transition source enable:</p> <p>0: (BUF_WMRK BUF_OVF) event flag condition is ignored by the auto-WAKE/SLEEP function (default).</p> <p>1: (BUF_WMRK BUF_OVF) event flag condition is used by the auto-WAKE/SLEEP function.</p> <p>FXLS8971CF enters SLEEP mode if the host system does not clear any of these flags before the auto-sleep timer expires (the ASLP_COUNT register sets the period). If the host clears the BUF_WMRK and BUF_OVF flags by flushing or reading out the buffered data (one or more samples), the auto-sleep timer resets and FXLS8971CF remains in the WAKE mode, regardless of the setting made in INT_EN[BUF_EN].</p> <p><i>Note:</i> The WAKE_SRC_BUF setting is only relevant when BUF_CONFIG1[BUF_MODE] = 01b (Stream mode) or 10b (Stop mode).</p>
5 to 0 BUF_WMRK[5:0]	<p>Buffer sample count watermark:</p> <p>This field sets the minimum number of buffer samples required to trigger a watermark interrupt. A buffer watermark event flag BUF_STATUS[BUF_WMRK] is raised whenever BUF_STATUS[BUF_CNT] ≥ BUF_CONFIG2[BUF_WMRK[5:0]].</p> <p>Setting BUF_WMRK = 0 disables the buffer watermark event flag generation.</p> <p>This field is also used to set the maximum number of pre-trigger samples to collect in triggered operating mode when BUF_CONFIG1[BUF_MODE] = 11b.</p>

12.4 Orientation detection settings registers

12.4.1 ORIENT_STATUS register (address 28h)

The ORIENT_STATUS register is used to determine the status of an Orientation change event, which is signaled when INT_STATUS[SRC_ORIENT] = 1. For information on the physical device orientations that correspond to the portrait up, portrait down, landscape left, landscape right, back, and front orientation states, see [Section 3.3: Orientation](#).

Table 82. ORIENT_STATUS register (address 28h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	NEW_ORIENT	LO		—		LAPO[1:0]		BAFRO
Reset	0	0	0	0	0	0	0	0
Access	R	R	R	R	R	R	R	R

Table 83. ORIENT_STATUS register (address 28h) bit description

Field	Description	
7 NEW_ORIENT	Orientation status change flag 0: No change in orientation detected 1: BAFRO and/or LAPO and/or Z-tilt lockout value has changed Notes	<ul style="list-style-type: none"> <i>The NEW_ORIENT bit is set to 1 after the first orientation detection after a Standby to Active transition and whenever a change in LO, BAFRO, or LAPO status occurs. The NEW_ORIENT bit is cleared anytime the ORIENT_STATUS register is read.</i> <i>The Auto-WAKE/SLEEP timer is reset (cleared) on the rising edge of this flag.</i>
6 LO	Z-tilt angle lockout 0: Lockout condition has not been detected. 1: Z-tilt lockout trip angle has been exceeded. Lockout condition has been detected. Note:	<i>The LO bit continues to update with orientation changes even after the NEW_ORIENT flag is set.</i>
2 to 1 LAPO[1:0]	Landscape/Portrait orientation 00: Portrait up: The device is oriented vertically in the upward direction. 01: Portrait down: The device is oriented vertically in the downward direction. 10: Landscape right: The device is oriented horizontally to the right. 11: Landscape left: The device is oriented horizontally to the left. Note:	<i>The LAPO[1:0] field continues to update with orientation changes even after the NEW_ORIENT flag is set.</i>
0 BAFRO	Back or front orientation 0: Front: The device is in the front-facing orientation. 1: Back: The device is in the back-facing orientation. Note:	<i>The BAFRO bit continues to update with orientation changes even after the NEW_ORIENT flag is set.</i>

Notes

- The BAFRO and LAPO fields are reset to 0 after a POR or soft reset event. These bits are also automatically cleared after a transition from STANDBY to ACTIVE or STANDBY to EXT_TRIG modes.*
- The current orientation is locked if the absolute value of the acceleration experienced on any of the three axes is greater than 1.25 g.*

12.4.2

ORIENT_CONFIG register (address 29h)

This register is used to enable the orientation detection function and set the behavior of the orientation transition debounce counter.

Table 84. ORIENT_CONFIG register (address 29h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	ORIENT_D BCNTM	ORIENT_E ENABLE				—		
Reset	1	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 85. ORIENT_CONFIG register (address 29h) bit description

Field	Description
7 ORIENT_DBCNTM	Orientation debounce counter mode selection 0: Orientation debounce counter is decremented whenever the current orientation is different than the previous one. 1: Orientation debounce counter is cleared whenever the current orientation is different than the previous one.
6 ORIENT_ENABLE	Orientation detection function enable 0 (default): Orientation detection function is disabled. 1: Orientation detection function is enabled.

12.4.3

ORIENT_DBCOUNT register (address 2Ah)

The **ORIENT_DBCOUNT** register sets the debounce count used for validating an orientation state change. The selected ODR in LPM and HPM modes, and the effective ODR when operating in FPM determine the debounce counter period. Calculate the minimum debounce latency time by $ODR^{-1} * ORIENT_DBCOUNT[7:0]$. For example, with an ODR of 100 Hz and debounce count value of 10, the new orientation must be maintained for 100 ms before it is recognized as a valid orientation and **ORIENT_STATUS[NEW_ORIENT]** is asserted. A transition from Standby to Active, a transition from Active to Standby, or a change in the auto-WAKE/SLEEP mode resets the internal orientation debounce counter.

Table 86. ORIENT_DBCOUNT register (address 2Ah) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	ORIENT_DBCOUNT[7:0]							
Reset	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 87. ORIENT_DBCOUNT register (address 2Ah) bit description

Field	Description
7 to 0 ORIENT_DBCOUNT[7:0]	8-bit unsigned orientation debounce counter value A new orientation must be maintained for the minimum number of ODR periods specified in order for the orientation to be considered valid before asserting the ORIENT_STATUS[NEW_ORIENT] event flag. ORIENT_CONFIG[ORIENT_DBCNTM] controls the counter behavior. The selected ODR in LPM and HPM modes and the effective ODR when operating in FPM determines the debounce counter period. Calculate the minimum debounce latency time by: $Debounce_time = (ODR^{-1} * ORIENT_DBCOUNT)$ <i>Note:</i> <i>If the applied acceleration is greater than 1.25 g on any axis, the debounce counter is held at the current value (frozen).</i>

12.4.4
ORIENT_BF_ZCOMP register (address 2Bh)

Orientation back/front and Z-tilt angle compensation register

Table 88. ORIENT_BF_ZCOMP register (address 2Bh) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	ORIENT_BKFR[1:0]					ORIENT_ZLOCK[2:0]		
Reset	0	1	0	0	0	1	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 89. ORIENT_BF_ZCOMP register (address 2Bh) bit description

Field	Description
7 to 6 ORIENT_BKFR[1:0]	Back-up/Front-up trip angle threshold Default: 01b; Step size is $\sim 5^\circ$ LSB. Range: $\pm 65^\circ$ to $\pm 80^\circ$. Default value of $\pm 75^\circ$
2 to 0 ORIENT_ZLOCK[2:0]	Z-lockout angle threshold Range of $\sim 13^\circ$ to 44° . Step size is $\sim 4^\circ$. Default value of 28.1°

Table 90. ORIENT_ZLOCK lockout angles

ORIENT_ZLOCK[2:0]	Resultant angle (min) for positions between Landscape and Portrait	Resultant angle (max) for ideal Landscape or Portrait
000	13.6°	14.5°
001	17.1°	18.2°
010	20.7°	22.0°
011	24.4°	25.9°
100	28.1°	30.0°
101	32.0°	34.2°
110	36.1°	38.7°
111	40.4°	43.4°

Table 91. ORIENT Back/Front orientation transition angle definitions

BKFR[1:0]	Back-to-Front Transition	Front-to-Back Transition
00	$Z < 80^\circ$ or $Z > 280^\circ$	$Z > 100^\circ$ and $Z < 260^\circ$
01	$Z < 75^\circ$ or $Z > 285^\circ$	$Z > 105^\circ$ and $Z < 255^\circ$
10	$Z < 70^\circ$ or $Z > 290^\circ$	$Z > 110^\circ$ and $Z < 250^\circ$
11	$Z < 65^\circ$ or $Z > 295^\circ$	$Z > 115^\circ$ and $Z < 245^\circ$

12.4.5 ORIENT_THS register (address 2Ch)

Orientation change trip thresholds configuration

Table 92. ORIENT_THS register (address 2Ch) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	ORIENT_THS[4:0]						ORIENT_HYS[2:0]	
Reset	1	0	0	0	0	1	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 93. Orientation change trip angles look-up table

ORIENT_THS[4:0] value	Threshold angle (approx.)
00h	0.0°
01h	1.8°
02h	3.8°
03h	5.9°
04h	8.1°
05h	10.5°
06h	13.0°
07h	15.6°
08h	18.4°
09h	21.4°
0Ah	24.4°
0Bh	27.6°
0Ch	31.0°
0Dh	34.4°
0Eh	37.9°
0Fh	41.4°
10h	45.0°
11h	48.6°
12h	52.1°
13h	55.6°
14h	59.0°
15h	62.4°
16h	65.6°
17h	68.6°
18h	71.6°
19h	74.4°
1Ah	77.0°
1Bh	79.5°
1Ch	81.9°
1Dh	84.1°
1Eh	86.2°

ORIENT_THS[4:0] value	Threshold angle (approx.)
1Fh	88.2°

Table 94. Resultant trip angle (threshold angle \pm hysteresis angle)

ORIENT_HYS[2:0]	Landscape-to-Portrait trip angle	Portrait-to-Landscape trip angle
0	45°	45°
1	49°	41°
2	52°	38°
3	56°	34°
4	59°	31°
5	62°	28°
6	66°	24°
7	69°	21°

Note: In Table 94, the default threshold angle of 45° is considered for calculating the resultant trip angle.

Table 95. Orientation change ideal orientation angle definitions


Orientation	X/Y axis g-levels
PU	y ~ -1 g, x ~ 0
PD	y ~ +1 g, x ~ 0
LR	y ~ 0, x ~ +1 g
LL	y ~ 0, x ~ -1 g

12.5

Sensor Data Change Detection (SDCD) registers

The Sensor Data Change Detection (SDCD) function is an inertial event detection function available to assist host software algorithms in detecting various inertial events such as motion/no-motion, high-g/low-g, tap/double tap, and transient acceleration events.

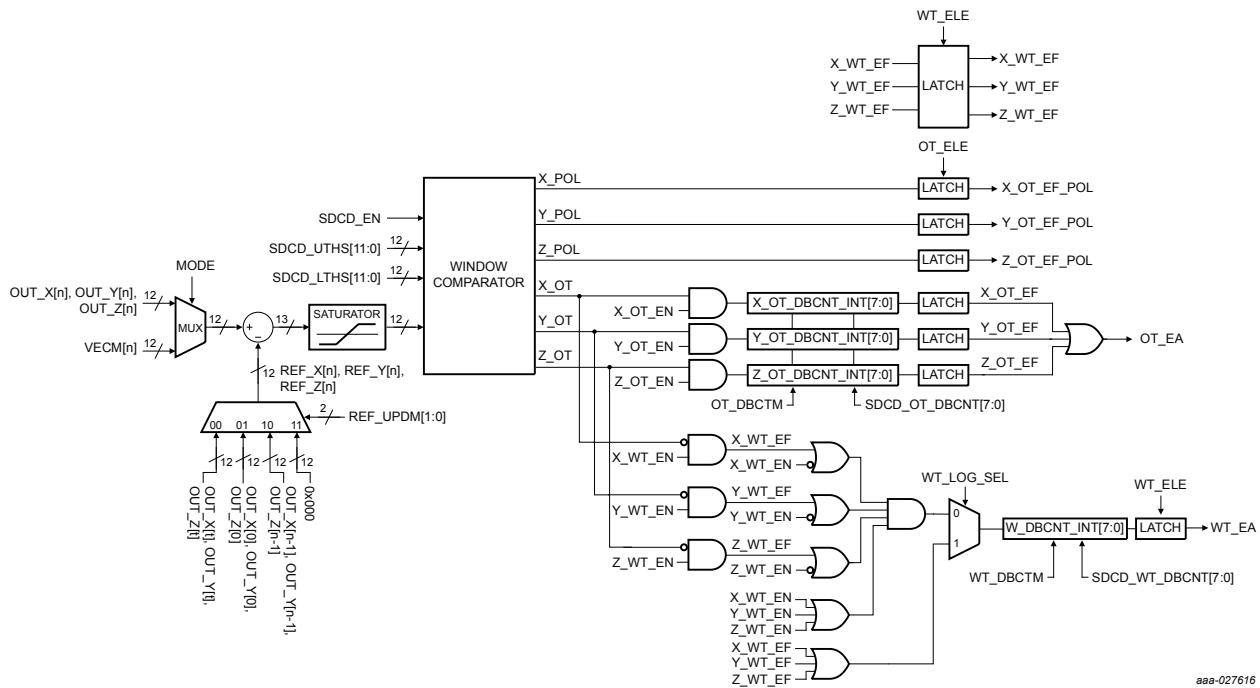Figure 20. SDCD Function Block Diagram



aaa-027616

12.5.1

SDCD_INT_SRC1 register (address 2Dh)

This register contains the SDCD outside-of-thresholds event status flags. If mapped to one of the INT1 or INT2 pins, the OT_EA flag may be used to signal interrupts to a host processor.

Table 96. SDCD_INT_SRC1 register (address 2Dh) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OT_EA	—	X_OT_EF	X_OT_POL	Y_OT_EF	Y_OT_POL	Z_OT_EF	Z_OT_POL
Reset	0	0	0	0	0	0	0	0
Access	R	R	R	R	R	R	R	R

Table 97. SDCD_INT_SRC1 register (address 2Dh) bit description

Field	Description	
7 OT_EA	<p>SDCD outside-of-thresholds event active flag</p> <p>0 (default): Event flag has not been asserted; the data for all enabled axes is within the window defined by SDCD_UHTS and SDCD_LHTS registers.</p> <p>1: One or more of the enabled axes sensor data (absolute mode) or deltas (relative mode) sits on or outside of (for example, (data or delta) \leq SDCD_LHTS or (data or delta) \geq SDCD_UHTS) the upper or lower thresholds specified in the SDCD_UHTS and SDCD_LHTS registers. The OT_EA flag is set whenever (X_OT_EF Y_OT_EF Z_OT_EF) evaluates to true for a number of ODR periods \geq SDCD_OT_DBCNT.</p>	
	<p>Notes</p> <ul style="list-style-type: none"> <i>The axes selected for participation in the over thresholds condition evaluation are enabled via the X/Y/Z_OT_EN bits in the SDCD_CONFIG1 register. If none of the X/Y/Z_OT_EN bits are set, then the SDCD_OT function is effectively disabled.</i> <i>When SENS_CONFIG4[WAKE_SDCD_OT] = 1, the Auto-WAKE/SLEEP timer is reset on every ODR cycle when the OT_EA flag is asserted (set), which prevents the device from transitioning into SLEEP mode. This flag must be de-asserted (cleared) in order for FXLS8971CF to transition to SLEEP mode.</i> 	
5 X_OT_EF	<p>X-axis data or delta-outside-of-upper-and-lower-thresholds event flag; enabled if X_OT_EN = 1</p> <p>0: X-axis data or delta is $<$ SDCD_UHTS value and $>$ SDCD_LHTS value.</p> <p>1: X-axis data or delta is either \geq SDCD_UHTS value or \leq SDCD_LHTS value; the X_OT_POL flag may be used to determine which threshold has been met or crossed.</p>	
4 X_OT_POL ^{(1) (2)}	<p>X-axis outside-of-thresholds polarity flag</p> <p>0: X-axis data or delta was \leq lower threshold value</p> <p>1: X-axis data or delta was \geq upper threshold value</p>	
3 Y_OT_EF	<p>Y-axis data or delta-outside-of-upper-and-lower-thresholds event flag; enabled if Y_OT_EN = 1</p> <p>0: Y-axis data or delta is $<$ SDCD_UHTS value and $>$ SDCD_LHTS value.</p> <p>1: Y-axis data or delta is either \geq SDCD_UHTS value or \leq SDCD_LHTS value; the Y_OT_POL flag may be used to determine which threshold has been met or crossed.</p>	
2 Y_OT_POL ^{(1) (2)}	<p>Y-axis outside-of-thresholds polarity flag</p> <p>0: Y-axis data or delta was equal to or below lower threshold value</p> <p>1: Y-axis data or delta was equal to or above upper threshold value</p>	
1 Z_OT_EF ^{(1) (2)}	<p>Z-axis data or delta-outside-of-upper-and-lower-thresholds event flag; enabled if Z_OT_EN = 1</p> <p>0: Z-axis data or delta is $<$ SDCD_UHTS value and $>$ SDCD_LHTS value</p> <p>1: Z-axis data or delta is either \geq SDCD_UHTS value or \leq SDCD_LHTS value; the Z_OT_POL flag may be used to determine which threshold has been met or crossed</p>	
0 Z_OT_POL	<p>Z-axis outside-of-thresholds polarity flag</p> <p>0: Z-axis data or delta was equal to or below lower threshold value</p> <p>1: Z-axis data or delta was equal to or above upper threshold value</p>	

1. *This flag is only meaningful if X/Y/Z_OT_EF = 1; their individual states are latched when the X/Y/Z_OT_EF flags are set, regardless of the state of SDCD_CONFIG1[OT_ELE].*
2. *When SDCD_CONFIG1[OT_ELE] = 0, these flags are updated when X/Y/Z_OT_EF = 1 and the SDCD_OT_DBCNT value is reached.*

12.5.2

SDCD_INT_SRC2 register (address 2Eh)

This register contains the SDCD within-thresholds event status flags. The WT_EA flag may be used to signal interrupts to a host processor are mapped to one of the INT1 or INT2 pins.

Table 98. SDCD_INT_SRC2 register (address 2Eh) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	WT_EA	—	X_WT_EF	—	Y_WT_EF	—	Z_WT_EF	—
Reset	0	0	0	0	0	0	0	0
Access	R	R	R	R	R	R	R	R

Table 99. SDCD_INT_SRC2 register (address 2Eh) bit description

Field	Description	
7 WT_EA	<p>SDCD within-thresholds event active flag</p> <p>0 (default): Event flag has not been asserted; none of the input data (absolute mode) or deltas (relative mode) for the enabled axes is within the window defined by the SDCD_UTHS and SDCD_LTHS registers.</p> <p>1: All, or at least one of, (depending on the LOGIC function selected in SDCD_CONFIG2[WT_LOG_SEL]) the enabled axes sensor data (absolute mode) or deltas (relative mode) sits within both the upper and lower thresholds specified in the SDCD_UTHS and SDCD_LTHS registers (for example, > SDCD_LTHS, and < SDCD_UTHS). This flag is set whenever the condition is true for a number of ODR cycles \geq SDCD_WT_DBCNT.</p> <p>Notes</p> <ul style="list-style-type: none"> <i>The axes selected for participation in the within thresholds condition evaluation are enabled via the X/Y/Z_WT_EN bits in the SDCD_CONFIG1 register. The logic mode for the function is set in the SDCD_CONFIG2 register. If none of the X/Y/Z_WT_EN bits are set then the SDCD_WT function is effectively disabled.</i> <i>When SENS_CONFIG4[WAKE_SDCD_WT] = 1, the Auto-WAKE/SLEEP timer is reset on every ODR cycle when the WT_EA flag is asserted (set), which prevents the device from transitioning into SLEEP mode. This flag must be deasserted (cleared) in order for FXLS8971CF to transition to SLEEP mode.</i> 	
5 X_WT_EF	<p>X-axis data or delta inside of upper and lower thresholds event flag; This flag is only valid if X_WT_EN = 1:</p> <p>0: X-axis data or delta is \geq SDCD_UTHS value or \leq SDCD_LTHS value.</p> <p>1: X-axis data or delta is < SDCD_UTHS and > SDCD_LTHS value.</p> <p>Notes</p> <ul style="list-style-type: none"> <i>The SDCD_CONFIG1[WT_ELE] bit determines the behavior of this bit. If WT_ELE = 1, the flag is latched when WT_EA goes high, and remains set until it is cleared by reading the SDCD_INT_SRC2 register. If the host wishes to know the state of this event flag, it must be read prior to reading the SDCD_INT_SRC2 register.</i> <i>If WT_ELE = 0, the X/Y/Z_WT_EF flags are updated if WT_EA = 1 and the SDCD_WT_DBCNT value is reached. If WT_ELE = 0, the X/Y/Z_WT_EF flags are updated even if WT_EA = 0 when the SDCD_WT_DBCNT value is set to 0.</i> 	
3 Y_WT_EF	<p>Y-axis data or delta inside of upper and lower thresholds event flag; This flag is only valid if Y_WT_EN = 1:</p> <p>0: Y-axis data or delta is \geq SDCD_UTHS value or \leq SDCD_LTHS value.</p> <p>1: Y-axis data or delta is < SDCD_UTHS and > SDCD_LTHS value.</p> <p>Notes</p> <ul style="list-style-type: none"> <i>The SDCD_CONFIG1[WT_ELE] bit determines the behavior of this bit. If WT_ELE = 1, the flag is latched when WT_EA goes high, and remains set until it is cleared by reading the SDCD_INT_SRC2 register. If the host wishes to know the state of this event flag, it must be read prior to reading the SDCD_INT_SRC2 register.</i> <i>If WT_ELE = 0, the X/Y/Z_WT_EF flags are updated if WT_EA = 1 and the SDCD_WT_DBCNT value is reached. If WT_ELE = 0, the X/Y/Z_WT_EF flags are updated even if WT_EA = 0 when the SDCD_WT_DBCNT value is set to 0.</i> 	
1 Z_WT_EF	<p>Z-axis data or delta inside of upper and lower thresholds event flag; This flag is only valid if Z_WT_EN = 1:</p>	

Field	Description	
	0: Z-axis data or delta is \geq SDCD_UTHS value or \leq SDCD_LTHS value. 1: Z-axis data or delta is $<$ SDCD_UTHS and $>$ SDCD_LTHS value. Notes	<ul style="list-style-type: none"><i>The SDCD_CONFIG1[WT_ELE] bit determines the behavior of this bit. If WT_ELE = 1, the flag is latched when WT_EA goes high, and remains set until it is cleared by reading the SDCD_INT_SRC2 register. If the host wishes to know the state of this event flag, it must be read prior to reading the SDCD_INT_SRC2 register.</i><i>If WT_ELE = 0, the X/Y/Z_WT_EF flags are updated if WT_EA = 1 and the SDCD_WT_DBCNT value is reached. If WT_ELE = 0, the X/Y/Z_WT_EF flags are updated even if WT_EA = 0 when the SDCD_WT_DBCNT value is set to 0.</i>

12.5.3 SDCD_CONFIG1 register (address 2Fh)

Table 100. SDCD_CONFIG1 register (address 2Fh) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	OT_ELE	WT_ELE	X_OT_E N	Y_OT_E N	Z_OT_E N	X_WT_E N	Y_WT_E N	Z_WT_E N
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	0	0	1	1	1	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 101. SDCD_CONFIG1 register (address 2Fh) bit description

Field	Description
7 OT_ELE	SDCD outside-of-thresholds event latch 0 (default): Outside of thresholds event flag latching is disabled. 1: Outside of thresholds event flag latching is enabled. With outside-of-thresholds event latching enabled, the X/Y/Z_OT_EF flags can only be cleared by reading the SDCD_INT_SRC1 register. When OT_ELE is set, the outside-of-thresholds event condition (OT_EA) flag is only asserted when the event condition transitions from False to True. For example, once the OT_EA flag is set, the event condition must become False before a subsequent True event is recognized. With outside-of-thresholds event latching disabled, the X/Y/Z_OT_EF flags are updated in real time and may be cleared by the function prior to the host system reading SDCD_INT_SRC1 if the event condition becomes false before the read occurs.
6 WT_ELE	SDCD within-thresholds event latch 0 (default): Within thresholds event flag latching is disabled. 1: Within thresholds event flag latching is enabled. With within-thresholds event latching enabled, the X/Y/Z_WT_EF flags can only be cleared by reading the SDCD_INT_SRC2 register. When within-thresholds event latching is disabled, the X/Y/Z_WT_EF flags are updated in real time and may be cleared by the function prior to the host system reading the SDCD_INT_SRC2 register, if the event condition becomes false before the read occurs. When WT_ELE is set, the within-thresholds event condition (WT_EA) flag is only asserted when the event condition transitions from False to True. For example, once the WT_EA flag is set, the event condition must become False before a subsequent True event will be recognized
5 X_OT_EN	SDCD function X-axis outside-of-thresholds condition 0: X-axis data or delta is not used in the outside of thresholds condition evaluation. 1: X-axis data or delta is used in the outside of thresholds condition evaluation.
4 Y_OT_EN	SDCD function Y-axis outside-of-thresholds condition 0: Y-axis data or delta is not used in the outside of thresholds condition evaluation. 1: Y-axis data or delta is used in the outside of thresholds condition evaluation.
3 Z_OT_EN	SDCD function Z-axis outside-of-thresholds condition 0: Z-axis data or delta is not used in the outside of thresholds condition evaluation. 1: Z-axis data or delta is used in the outside of thresholds condition evaluation.
2 X_WT_EN	SDCD function X-axis within-thresholds condition 0: X-axis data or delta is not used in the within thresholds condition evaluation. 1: X-axis data or delta is used in the within thresholds condition evaluation.
1 Y_WT_EN	SDCD function Y-axis within-thresholds condition 0: Y-axis data or delta is not used in the within thresholds condition evaluation. 1: Y-axis data or delta is used in the within thresholds condition evaluation.
0 Z_WT_EN	SDCD function Z-axis within-thresholds condition 0: Z-axis data or delta is not used in the within thresholds condition evaluation.

Field	Description
	1: Z-axis data or delta is used in the within thresholds condition evaluation.

12.5.4 SDCD_CONFIG2 register (address 30h)


Table 102. SDCD_CONFIG2 register (address 30h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	SDCD_EN	REF_UPDM[1:0]		OT_DBC_TM	WT_DBC_TM	WT_LOG_SEL	MODE	REF_UPD
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	1	1	0	1	1	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 103. SDCD_CONFIG2 register (address 30h) bit description

Field	Description
7 SDCD_EN	SDCD function 0 (default after a POR or soft reset event when BT_MODE = GND): SDCD function is disabled. All clocks and power for the function are turned off. 1 (default after a POR or soft reset event when BT_MODE = V _{DD} and MOT_DET = 1): SDCD function is enabled. When this bit is set, the 12-bit reference values (REF_X/Y/Z) are initialized per the settings made in REF_UPDM[1:0].
6 to 5 REF_UPDM	SDCD internal reference values update mode 00b: The function stores the first 12-bit X/Y/Z decimated and trimmed input data (OUT_X/Y/Z[n=0]) as the internal REF_X/Y/Z values after the function is enabled (SDCD_EN is set to 1). The REF_X/Y/Z values are updated with the current 12-bit X/Y/Z decimated input data (OUT_X/Y/Z[n]) whenever the SDCD_OT_EA flag is true. 01b: The function stores the first decimated and trimmed X/Y/Z acceleration input data (OUT_X/Y/Z[n=0]) as the internal REF_X/Y/Z values when the SDCD function is enabled; the REF_X/Y/Z values are then held constant and never updated until the SDCD function is disabled and subsequently reenabled, or asynchronously when the host sets the REF_UPD bit. 10b: The function updates the SDCD_REF_X/Y/Z values with the current decimated and trimmed X/Y/Z acceleration input data after the function evaluation. This operation allows for acceleration slope detection with Data(n) to Data(n-1) always used as the input to the window comparator. 11b: The function uses a fixed value of 0 for each of the SDCD_REF_X/Y/Z registers, making the function operate in absolute comparison mode.
4 OT_DBCTM	SDCD outside-of-threshold event debounce counter behavior 0 (default): Debounce counter decrements by 1 when the current outside of thresholds result for the enabled axes is false. In this mode, the debounce counter de-bounces the outside of thresholds event in both directions, meaning that once the event flag has been set (after SDCD_OT_DBCNT ODR periods with the condition true), the condition must also remain false for at least SDCD_OT_DBCNT + 1 consecutive ODR periods before the next event detection cycle can begin. 1: Debounce counter is cleared whenever the current outside of thresholds result for the enabled axes is false.
3 WT_DBCTM	SDCD within-thresholds event debounce counter behavior 0 (default): Debounce counter decrements by 1 when the current within thresholds result for the enabled axes is false. In this mode, the debounce counter de-bounces the event in both directions, meaning that once the event flag has been set (after SDCD_WT_DBCNT ODR periods with the condition true), the condition must also remain false for at least SDCD_WT_DBCNT + 1 consecutive ODR periods before the next event detection cycle can begin. 1: Debounce counter is cleared whenever the SDCD within thresholds result for the enabled axes is false.
2 WT_LOG_SEL	SDCD within-thresholds event logic selection 0 (default): Function uses the logical AND of the enabled axes. 1: Function uses the logical OR of the enabled axes.
1	SDCD input data mode

Field	Description
MODE	<p>0 (default): Function uses X, Y, Z acceleration data for the window comparison.</p> <p>1: Function uses Vector magnitude data for the window comparison on the X-axis channel only; all other SDCD channels are disabled and ignored by the function.</p> <p>Note: <i>The SENS_CONFIG5[VECM_EN] bit must also be set in order for the SDCD function to operate correctly when MODE is set to 1.</i></p>
0 REF_UPD	<p>SDCD synchronous X/Y/Z reference values update bit</p> <p>0: No reference update pending or reference update has completed.</p> <p>1: Triggers a synchronous update of the internal X/Y/Z reference registers.</p> <p>When the REF_UPD bit is set, it forces a synchronous update of the internal REF_X/Y/Z registers. If REF_UPDM[1:0] = 11b (absolute mode), no update occurs and the REF_X/Y/Z values remain fixed at 000h. The actual update of the internal reference values with the X/Y/Z acceleration data may be delayed by up to 1 ODR period after this bit is set. See Figure 21 for further details.</p> <p>Notes</p> <ul style="list-style-type: none"> • <i>This bit is self-cleared after the REF_X/Y/Z registers are updated. The host may not be able to observe a value of '1' as the operation can complete before the next I²C or SPI read cycle occurs.</i> • <i>This bit can be written at any time in either Active or Standby mode.</i>

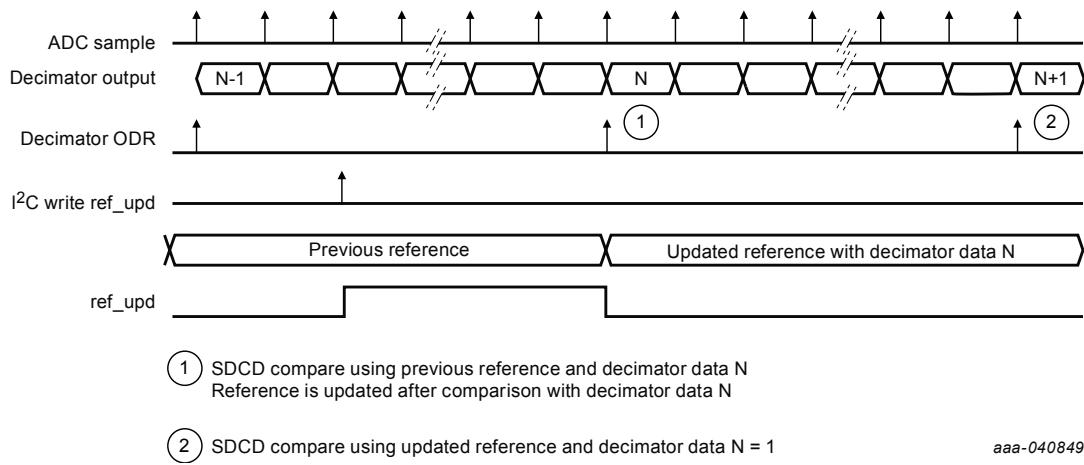Figure 21. SDCD REF_UPD timing diagram

aaa-040849

12.5.5

SDCD_OT_DBCNT register (address 31h)

Debounce count threshold register for SDCD outside-of-thresholds condition event detection.

The timer count period is equal to the selected ODR period in LPM and HPM modes, and to the effective ODR period (measurement + idle time) in FPM.

This register sets the minimum number of debounce counts needed to recognize the SDCD outside-of-threshold function event condition as true.

A transition from Standby to Active, Active to Standby, or Auto-WAKE/SLEEP mode change resets the internal counter.

Table 104. SDCD_OT_DBCNT register (address 31h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	SDCD_OT_DBCNT[7:0]							
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 105. SDCD_OT_DBCNT register (address 31h) bit description

Field	Description
7 to 0 SDCD_OT_DBCNT[7:0]	This value defines the minimum number of debounce counts required for the detection of an outside-of-thresholds condition. The OT_DBCNTM bit determines the behavior of the counter when the condition of interest is false. The time step for the counter is the same as the selected ODR period (or effective ODR period in FPM).

12.5.6

SDCD_WT_DBCNT register (address 32h)

Debounce count threshold register for SDCD within-thresholds condition event detection.

The timer count period is equal to the selected ODR period in LPM and HPM modes, and to the effective ODR period (measurement + idle time) in FPM.

This register sets the minimum number of debounce counts needed to recognize the SDCD within-threshold condition as true.

A transition from Standby to Active, Active to Standby, or a change in an Auto-WAKE/SLEEP mode change resets the internal counter.

Table 106. SDCD_WT_DBCNT register (address 32h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	SDCD_WT_DBCNT[7:0]							
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 107. SDCD_WT_DBCNT register (address 32h) bit description

Field	Description
7 to 0 SDCD_WT_DBCNT[7:0]	The SDCD_WT_DBCNT value defines the minimum number of debounce sample counts required for the detection of an SDCD_WT condition event. The WT_DBCNTM bit determines the behavior of the counter when the condition of interest is momentarily not true. The time step for the counter is the same as the selected ODR period (or effective ODR period in FPM).

12.5.7

SDCD_LTHS_LSB register (address 33h)

Sensor Data Change Detection function 12-bit 2's complement lower threshold least significant byte.

SDCD_LTHS[11:0] must always be set to a lower value than **SDCD_UTHS[11:0]** to ensure that the SDCD circuit functions correctly and produces meaningful results.

The scaling for this register is always the same as the selected FSR sensitivity. See [Section 6: Mechanical characteristics](#) for the sensitivity values corresponding to each of the selectable FSRs.

Table 108. SDCD_LTHS_LSB register (address 33h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	SDCD_LTHS[7:0]							
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	1	1	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 109. SDCD_LTHS_LSB register (address 33h) bit description

Field	Description
7 to 0 SDCD_LTHS[7:0]	LSB of the signed 12-bit 2's complement lower threshold value.

12.5.8

SDCD_LTHS_MSB register (address 34h)

Sensor Data Change Detection function 12-bit 2's complement lower threshold most significant byte (nibble).

SDCD_LTHS[11:0] must always be set to a lower value than **SDCD_UTHS[11:0]** to ensure that the SDCD circuit functions correctly and produces meaningful results.

The scaling for this register is always the same as the selected FSR sensitivity. See [Section 6: Mechanical characteristics](#) for the sensitivity values corresponding to each of the selectable FSRs.

Table 110. SDCD_LTHS_MSB register (address 34h) bit allocation

Bit	7	6	5	4	3	2	1	0				
Name	—	—	—	—	SDCD_LTHS[11:8]							
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0				
Reset (BT_MODE = V_{DD})	0	0	0	0	1	1	1	1				
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W				

Table 111. SDCD_LTHS_MSB register (address 34h) bit description

Field	Description
3 to 0 SDCD_LTHS[11:8]	MSB (nibble) of the signed 12-bit 2's complement lower-threshold value

12.5.9 SDCD_UTHS_LSB register (address 35h)

Sensor Data Change Detection function 12-bit 2's complement upper-threshold least significant byte.

SDCD_UTHS[11:0] must always be set to a higher value than **SDCD_LTHS[11:0]** to ensure that the SDCD circuit functions correctly and produces meaningful results.

The scaling for this register is the same as the selected FSR sensitivity. See [Section 6: Mechanical characteristics](#) for the sensitivity values corresponding to each of the selectable FSRs.

Table 112. SDCD_UTHS_LSB register (address 35h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	SDCD_UTHS[7:0]							
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	0	1	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 113. SDCD_UTHS_LSB register (address 35h) bit description

Field	Description
7 to 0 SDCD_UTHS[7:0]	LSB of the signed 12 bit 2's complement upper-threshold value

12.5.10 SDCD_UTHS_MSB register (address 36h)

Sensor Data Change Detection function 12-bit 2's complement upper-threshold most-significant byte (nibble).

SDCD_UTHS[11:0] must always be set to a higher value than **SDCD_LTHS[11:0]** to ensure that the SDCD circuit functions correctly and produces meaningful results.

The scaling for this register is always the same as the selected FSR sensitivity. See [Section 6: Mechanical characteristics](#) for the sensitivity values corresponding to each of the selectable FSRs.

Table 114. SDCD_UTHS_MSB register (address 36h) bit allocation

Bit	7	6	5	4	3	2	1	0
Name	—	—	—	—	SDCD_UTHS[11:8]			
Reset (BT_MODE = GND)	0	0	0	0	0	0	0	0
Reset (BT_MODE = V_{DD})	0	0	0	0	0	0	0	0
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Table 115. SDCD_UTHS_MSB register (address 36h) bit description

Field	Description
3 to 0 SDCD_UTHS[11:8]	MSB (nibble) of the signed 12-bit 2's complement upper-threshold value

12.6 Self-test configuration registers

12.6.1 SELF_TEST_CONFIG1 register (address 37h)

Table 116. SELF_TEST_CONFIG1 register (address 37h) bit allocation

Bit	7	6	5	4	3	2	1	0	
Name	—	—	—	ST_IDLE[4:0]					
Reset	0	0	0	0	0	0	0	0	
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W	

Table 117. SELF_TEST_CONFIG1 register (address 37h) bit description

Field	Description
4 to 0 ST_IDLE	Self-Test Idle phase duration: The value contained in ST_IDLE determines the Self-Test Idle phase duration per Eq. (3). $ST_{IDLE} (\mu s) = 312.5 + (ST_{IDLE}[4:0] \times 31.25)$ (3)

12.6.2 SELF_TEST_CONFIG2 register (address 38h)

Table 118. SELF_TEST_CONFIG2 register (address 38h) bit allocation

Bit	7	6	5	4	3	2	1	0			
Name	—	—	—	—	ST_DEC[3:0]						
Reset	0	0	0	0	0	0	0	0			
Access	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W			

Table 119. SELF_TEST_CONFIG2 register (address 38h) bit description

Field	Description
3 to 0 ST_DEC	Self-Test measurement phase decimation factor This bit field selects the Self-Test measurement phase decimation factor. The decimation selection ranges from 1 to 4096 as shown in Table 120.

Table 120. Self-Test measurement phase decimation settings

ST_DEC[3]	ST_DEC[2]	ST_DEC[1]	ST_DEC[0]	Decimation selection (Number of samples)	Self-Test measurement period (ms)	Self-Test ODR (Hz)
0	0	0	0	1	0.3125	3200
0	0	0	1	2	0.625	1600
0	0	1	0	4	1.25	800
0	0	1	1	8	2.5	400
0	1	0	0	16	5	200
0	1	0	1	32	10	100
0	1	1	0	64	20	50
0	1	1	1	128	40	25
1	0	0	0	256	80	12.5
1	0	0	1	512	160	6.25
1	0	1	0	1024	320	3.125
1	0	1	1	2048	640	1.563
1	1	0	0	4096	1280	0.78125
1	1	0	1	4096	1280	0.78
1	1	1	0	4096	1280	0.781
1	1	1	1	4096	1280	0.781

Notes

- During the self-test sequence, the accelerometer measurement period in μ s (for each axis and each direction) is given by Eq. (4).

$$ST_{PERIOD} (\mu\text{s}) = 2^{ST_DEC[3:0]} \times [312.5 + (ST_IDLE[4:0] \times 31.25)] \quad (4)$$
- The user-selected ODR and power mode settings are ignored during self-test operation. The user-selected settings for ODR and power mode are applied after self-test is disengaged, for example, **SENSCONFIG1[...]ST_AXIS_SEL[1:0] = 00b**.

13 Application information

13.1 System connections

FXLS8971CF connects to a host processor through an I²C or SPI interface. Figure 22 to Figure 27 show the recommended circuit connections.

13.2 Recommendation for reading data registers

When operating in active mode the sensor stores the acceleration measurement in the associated LSB and MSB Data registers. Assuming Fast Mode Read is not used, it is important to ensure the coherency between MSB and LSB data bytes for a given axis when the host MCU reads those two registers, in order words, they both need to correspond to the same measurement sample.

As mentioned in the registers description, the output data is latched into the OUT_X/Y/Z registers along with the assertion of the SRC_DRDY event flag. Moreover, when the host MCU initiates a data register read transaction on the secondary interface (Start condition in I²C mode or SPI_CS transition to low level in SPI mode), the content of all data registers is locked till the transaction is completed. There are actually shadow registers to prevent that data registers are updated when a new sample becomes available.

If the MCU performs single byte read transactions, the coherency between MSB and LSB data bytes cannot be granted as they will be associated to two distinct transactions. Consequently it is highly recommended to use multiple bytes for data reading, in order to at least collect both MSB and LSB data bytes with a unique read transaction. Obviously, the MCU can collect all three axes data simultaneously (6 bytes) with a multiple bytes data reading, and this will also ensure that the XYZ data triplet corresponds to the same timestamp.

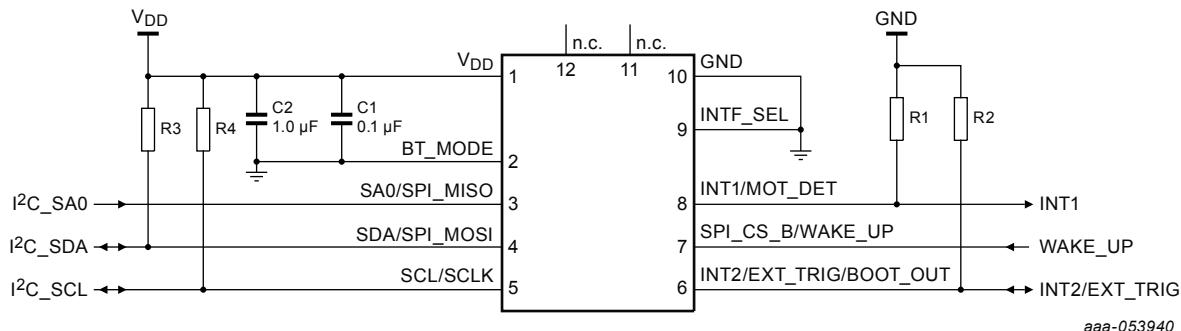
Note: *This constraint is mostly valid for asynchronous data reading. It is quite lightened if the host MCU configures the sensor data ready interrupt to perform synchronous (interrupt driven) data reading, as this provides an adequate trigger to read the samples. The synchronous reading scheme is also recommended to avoid unnecessary traffic on the secondary interface, such as polling status registers.*

Those considerations applies to normal Data output registers OUT_X/Y/Z, but also to BUFF_X/Y/Z registers and VECM registers.

13.3 Typical application circuits


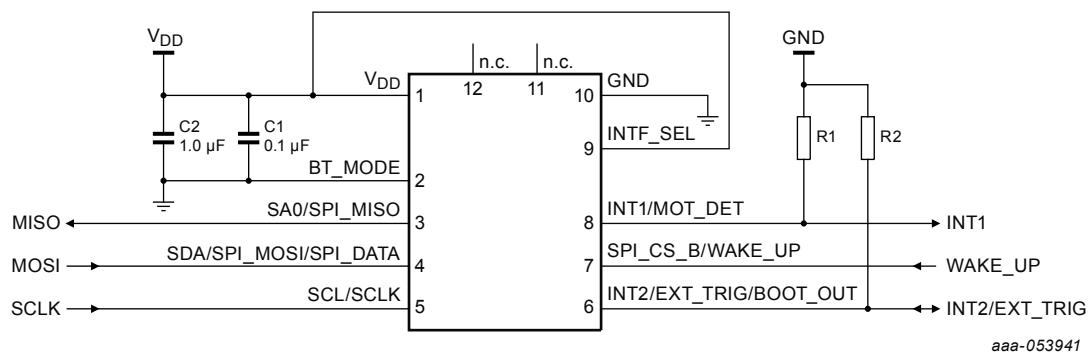
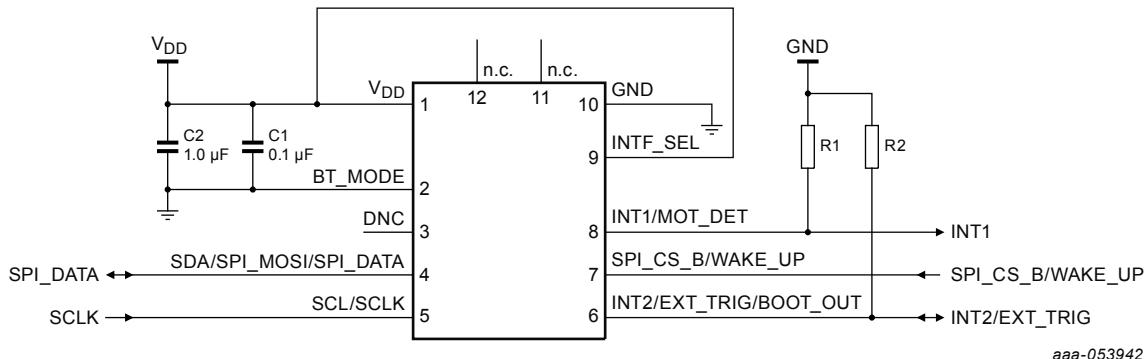
X7R or X5R ceramic capacitors are recommended for V_{DD} supply decoupling. A 1 μ F capacitor in parallel with a 0.1 μ F is recommended as a starting point per the EMC test standard. These capacitors should be placed as close to the V_{DD} supply pin as practical. The values of the capacitors can be changed to suit the EMC performance requirements of the application.

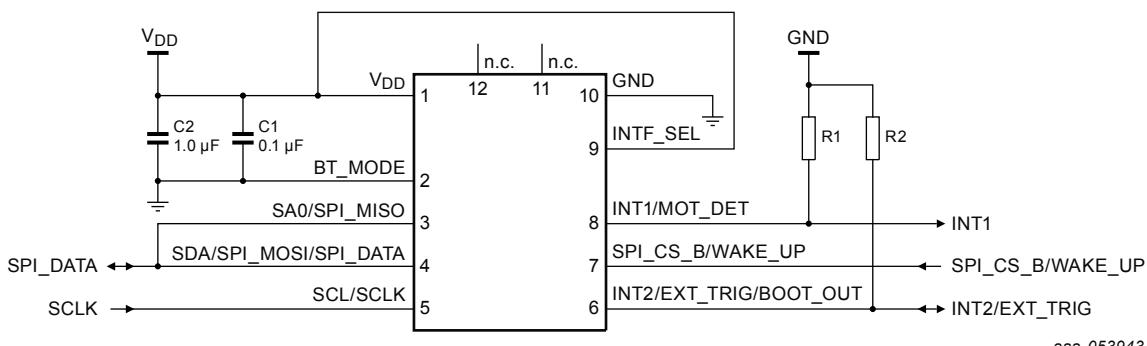Figure 22. Typical Application Circuit #1 – I²C mode



Notes

- Resistors R_1 and R_2 are not needed if the interrupt output driver type is configured for push-pull operation (default). In order to avoid their residual current consumption in default state (no interrupt asserted), it is recommended to connect them either to GND or VDD according to INT_POL choice (1 or 0 respectively).
- If either the $INT1$ or $INT2$ pins are not used in the application, leave them unconnected.
- The required pull-up resistor values for R_3 and R_4 are dependent on several factors including the I²C clock frequency, bus pull-up voltage, and the total parasitic trace + device capacitances. A suggested starting point is 4.7 k Ω for Standard and Fast modes.
- The external trigger function can be used to initiate a single shot measurement of the XYZ acceleration and temperature data. This mode is useful for synchronizing measurements with an external system or for creating user-specific ODRs. The measurement is triggered on the rising edge of the EXT_TRIG signal.

Figure 23. Typical Application Circuit #2 – SPI 4-wire mode

Figure 24. Typical Application Circuit #3 – SPI 3-wire mode (software enabled; SENS_CONFIG1[SPI_M] = 1)

Figure 25. Typical Application Circuit #4 – SPI 3-wire mode (hardwired; SENS_CONFIG1[SPI_M] = X)


Notes

- The external trigger function can be used to trigger a single shot measurement of the XYZ acceleration and temperature data. This mode is useful for synchronizing measurements with an external system or for creating user-specific ODRs. The measurement is triggered on the rising edge of the *EXT_TRIG* signal.
- Resistors *R1* and *R2* are not needed if the interrupt output driver type is configured for push-pull operation (default). A suggested range for open-drain configuration is 10 kΩ to 100 kΩ.
- If the *INT1* pin, *INT2* pin, or both pins are not used in the application, leave the unused pins unconnected.
- The *SPI_CS_B* pin also serves as a signal to wake the device from Hibernate mode.
- See [Section 10.2: SPI write operations with 3- or 4-wire mode](#) and [Section 10.4: SPI read operations with 3-wire mode](#) for more details on 3-wire SPI mode.

Figure 26. Typical Application Circuit #5 – Motion detection mode (no serial interface)


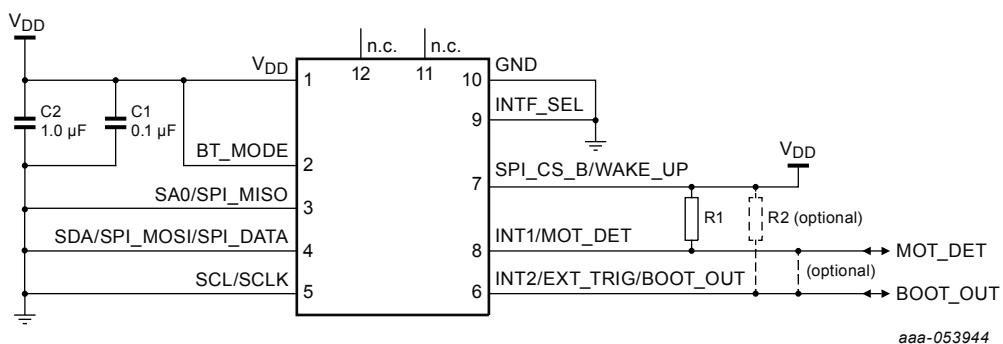


Figure 27. Typical Application Circuit #6 - Motion detection mode (with SPI 3-wire interface, software enabled)

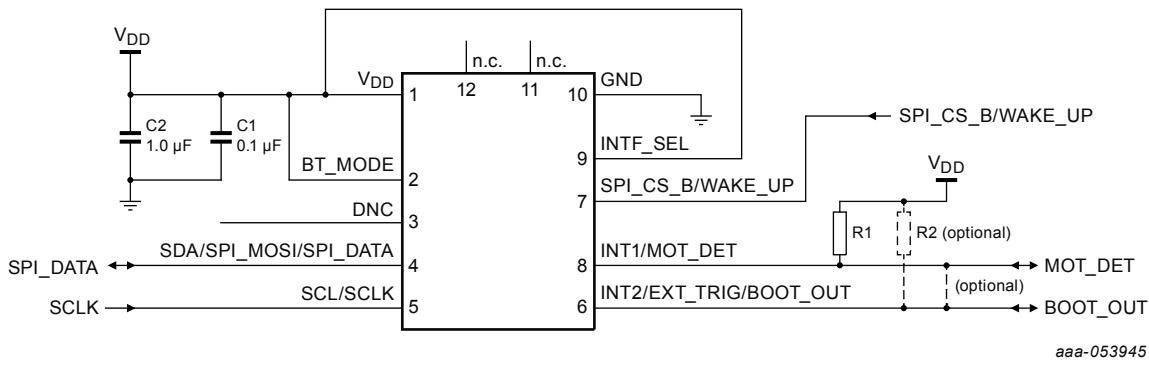

Notes

- External resistor *R2* is not needed if the *BOOT_OUT* and *MOT_DET* pins are tied together (wired AND configuration).
- A suggested pull-up resistance range is 1 MΩ to 2.5 MΩ for both *R1* and *R2* to minimize the power dissipated in the resistor when the line is pulsed low. When *BT_MODE* is set to *V_{DD}* (enabling motion detection mode), both the *MOT_DET* and *BOOT_OUT* pins become open-drain output driver types. *MOT_DET* also functions as a CMOS input and is used by the host system to power-manage FXLS8971CF.
- When *BT_MODE* = *V_{DD}*, the default motion detection parameters are automatically loaded into the device after a POR/BOR event occurs; no configuration via I²C or SPI is needed if the default parameters are used in the application.
- See [Section 10.2: SPI write operations with 3- or 4-wire mode](#) and [Section 10.4: SPI read operations with 3-wire mode](#) for more details on 3-wire SPI mode. In motion detection mode with *BT_MODE*=*V_{DD}*, use of HPM or FPM mode is not advised. Only the default LPM mode should be used.

13.4 Power supply considerations

It is recommended that V_{DD} be sourced from a low noise linear supply regulator (LDO). When using a switch mode supply, the recommended minimum voltage is 1.8 V (nominal), providing headroom for supply noise and ripple rejection. This headroom ensures that the device meets its performance specifications while also preventing a BOR/POR event from occurring when operated on a noisy supply rail.

FXLS8971CF contains a POR generator. This circuit resets the digital logic and restores all register content to the default values shown in [Table 20. Register address map](#) after applying $V_{DD} \geq 1.71$ V, or after a soft reset command is issued by setting **SENS_CONFIG1[RST]** = 1.

Note: *The host system must wait for a nominal time period of $T_{BOOT1/2}$ ms after applying $V_{DD} \geq 1.71$ V, or after issuing a soft reset command, to allow enough time for FXLS8971CF to complete its internal boot sequence and be ready for communication over the I²C or SPI interfaces.*

When the BT_MODE pin is low, with **INT_EN[BOOT_DIS]** = 0, the host system can wait until the active edge of a $T_{PULSE-BOOT1}$ μ s pulse is observed on the INTx pin (determined by **INT_PIN_SEL[BOOT_INT2]**) indicating completion of the boot sequence. When the BT_MODE pin is logic high, the INT2 pin is configured as an open-drain output (BOOT_OUT) that pulses low for $T_{PULSE-BOOT2}$ ms after the boot sequence completes.

14 Package outline

The FXLS8971CF uses a twelve-pin QFN package, case number 98ASA01979D.


Note: *Trademark property of NXP, used by STMicroelectronics under license*

14.1 Package description

Figure 28. FXLS8971CF package outline

PQFN-12 I/O STEP-CUT WETTABLE FLANK
3 X 3 X 1.25 PKG, 0.65 PITCH

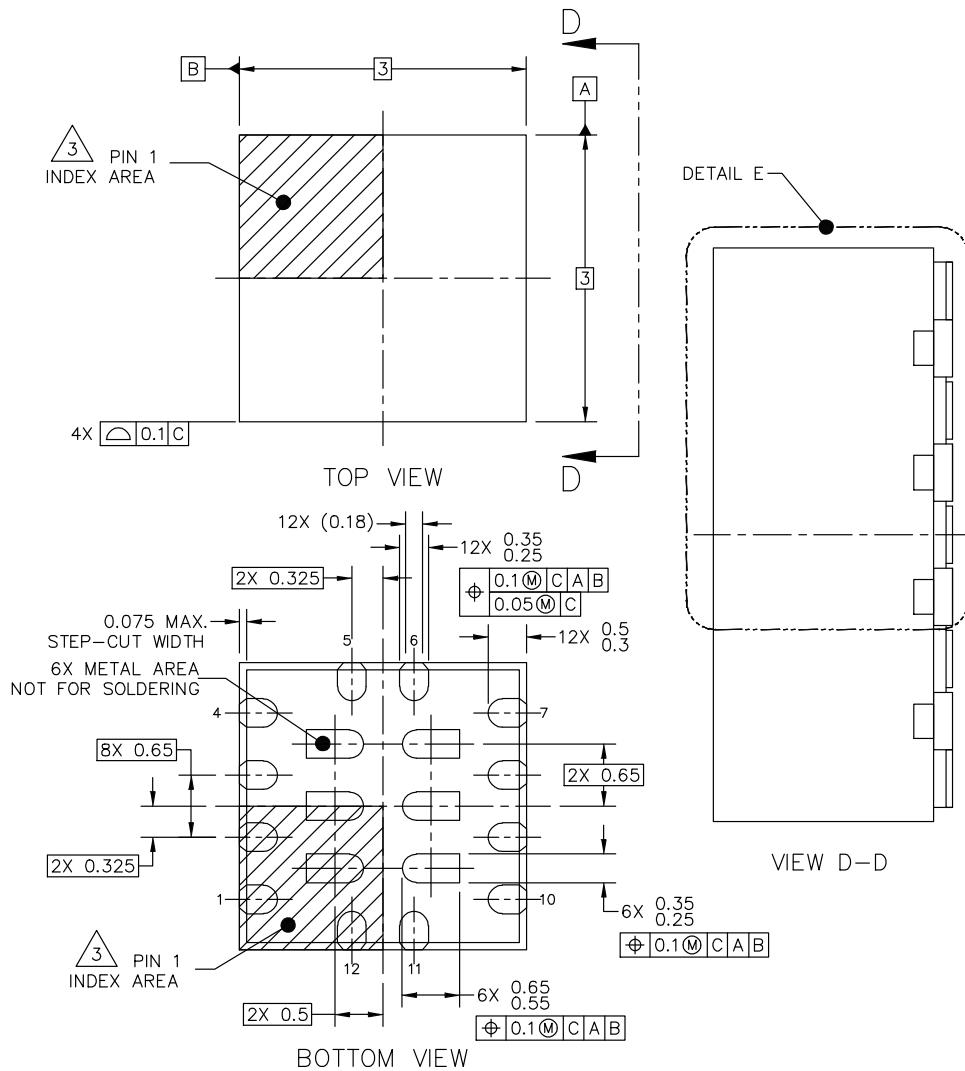SOT2197-1(SC)



© NXP B.V. ALL RIGHTS RESERVED


DATE: 17 JAN 2024

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: NON-JEDEC	DRAWING NUMBER: 98ASA01979D	REVISION: B
--	------------------------	--------------------------------	----------------

Figure 29. FXLS8971CF package outline detail

PQFN-12 I/O STEP-CUT WETTABLE FLANK
3 X 3 X 1.25 PKG, 0.65 PITCH

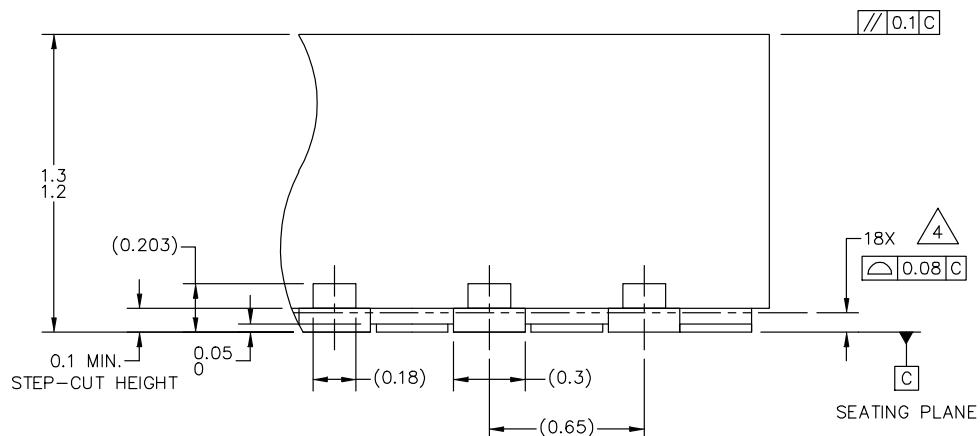SOT2197-1(SC)



DETAIL E
VIEW ROTATED 90° CW

© NXP B.V. ALL RIGHTS RESERVED DATE: 17 JAN 2024
 MECHANICAL OUTLINE STANDARD: DRAWING NUMBER: REVISION:
 PRINT VERSION NOT TO SCALE NON-JEDEC 98ASA01979D B

Figure 30. FXLS8971CF package outline notesPQFN-12 I/O STEP-CUT WETTABLE FLANK
3 X 3 X 1.25 PKG, 0.65 PITCH

SOT2197-1(SC)

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. PIN 1 FEATURE SHAPE, SIZE AND LOCATION MAY VARY.
4. COPLANARITY APPLIES TO LEADS AND DIE ATTACH FLAG.
5. MIN. METAL GAP FOR LEAD TO EXPOSED PAD SHALL BE 0.2 MM.

© NXP B.V. ALL RIGHTS RESERVED

DATE: 17 JAN 2024

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: NON-JEDEC	DRAWING NUMBER: 98ASA01979D	REVISION: B	
--	------------------------	--------------------------------	----------------	--

14.2**Burr specification**

The assembly site specifies burrs to 0.076 mm maximum.

15 Soldering information

15.1 Printed circuit board layout and device mounting

Printed circuit board (PCB) layout and device mounting are critical to the overall performance of the design. The footprint for the surface mount packages must be the correct size as a base for a proper solder connection between the PCB and the package. The correct size of the surface mount package footprint, along with the recommended soldering materials and techniques, optimize assembly and minimize the stress on the package after board mounting.

Application note AN1902 [\[1\]](#) discusses the QFN package used by the FXLS8971CF.

15.1.1 Overview of soldering considerations

The information provided here is based on experiments executed on QFN devices. They do not represent exact conditions present at a customer site. Therefore, information herein should be used as guidance only, and process and design optimizations are recommended to develop an application-specific solution. It should be noted that with the proper PCB footprint and solder stencil designs, the package self-aligns during the solder reflow process.

15.1.2 Halogen content

This package is Halogen free, exceeding most industry and customer standards. Halogen Free means that no homogeneous material within the assembly package shall contain chlorine (Cl) in excess of 700 ppm or 0.07 % weight/weight or bromine (Br) in excess of 900 ppm or 0.09 % weight/weight.

16 Mounting information


16.1 PCB mounting recommendations

- No additional via, copper layer, solder mask, metal pattern underneath package on the mounted layer of the PCB.
- Do not place any components or vias within 2 mm of the package land area as it may cause additional package stress if placed too close to the package land area.
- Signal traces connected to pads should be as symmetric as possible. To have the same length of exposed trace for all pads, put dummy traces on NC pads .
- Use a standard pick-and-place process and equipment. Do not use a hand soldering process.
- Customers are advised to be cautious about the proximity of screw-down holes to the sensor, and the location of any press fit to the assembled PCB when in an enclosure. It is important that the assembled PCB remain flat after assembly to keep electronic operation of the device optimal.
- The PCB should be rated for the multiple lead-free reflow condition with a maximum 260 °C temperature.
- The sensors are compliant with Restrictions on Hazardous Substances (RoHS), having halide-free molding compound (green) and lead-free terminations. These terminations are compatible with tin-lead (Sn-Pb) as well as tin-silver-copper (Sn-Ag-Cu) solder paste soldering processes. Reflow profiles applicable to those processes can be used successfully for soldering the devices.

Figure 31. PCB design guidelines - Solder mask opening pattern

PQFN-12 I/O STEP-CUT WETTABLE FLANK
3 X 3 X 1.25 PKG, 0.65 PITCH

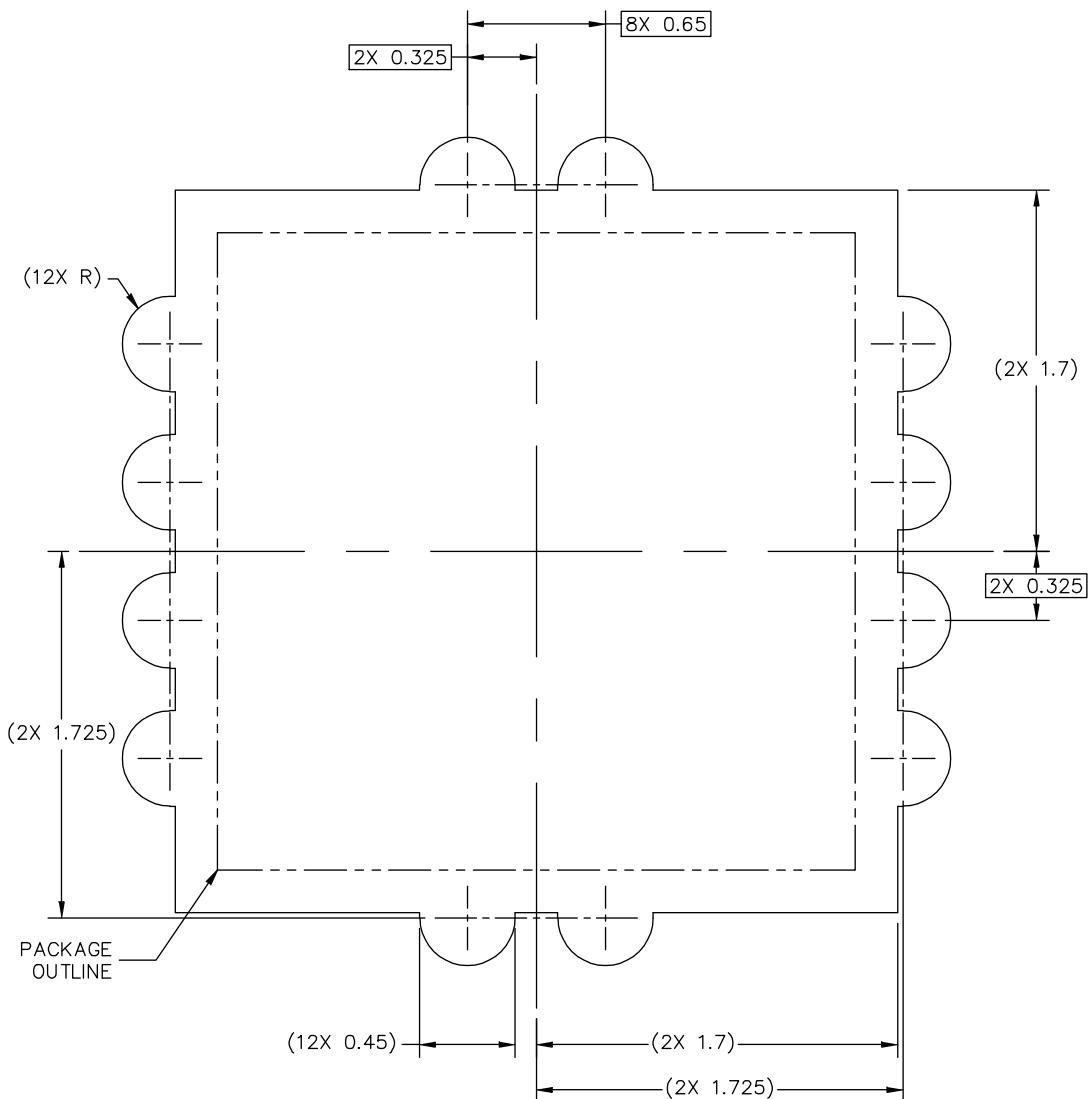SOT2197-1(SC)



PCB DESIGN GUIDELINES - SOLDER MASK OPENING PATTERN

THIS SHEET SERVES ONLY AS A GUIDELINE TO HELP DEVELOP A USER SPECIFIC SOLUTION. DEVELOPMENT EFFORT WILL STILL BE REQUIRED BY END USERS TO OPTIMIZE PCB MOUNTING PROCESSES AND BOARD DESIGN IN ORDER TO MEET INDIVIDUAL/SPECIFIC REQUIREMENTS.

© NXP B.V. ALL RIGHTS RESERVED


DATE: 17 JAN 2024

© NXP B.V. ALL RIGHTS RESERVED DATE: 17 JAN 2024
MECHANICAL OUTLINE STANDARD: DRAWING NUMBER: REVISION:
PRINT VERSION NOT TO SCALE NON-JEDEC 98ASA01979D B

Figure 32. PCB design guideline - I/O pads and solderable area

PQFN-12 I/O STEP-CUT WETTABLE FLANK
3 X 3 X 1.25 PKG, 0.65 PITCH

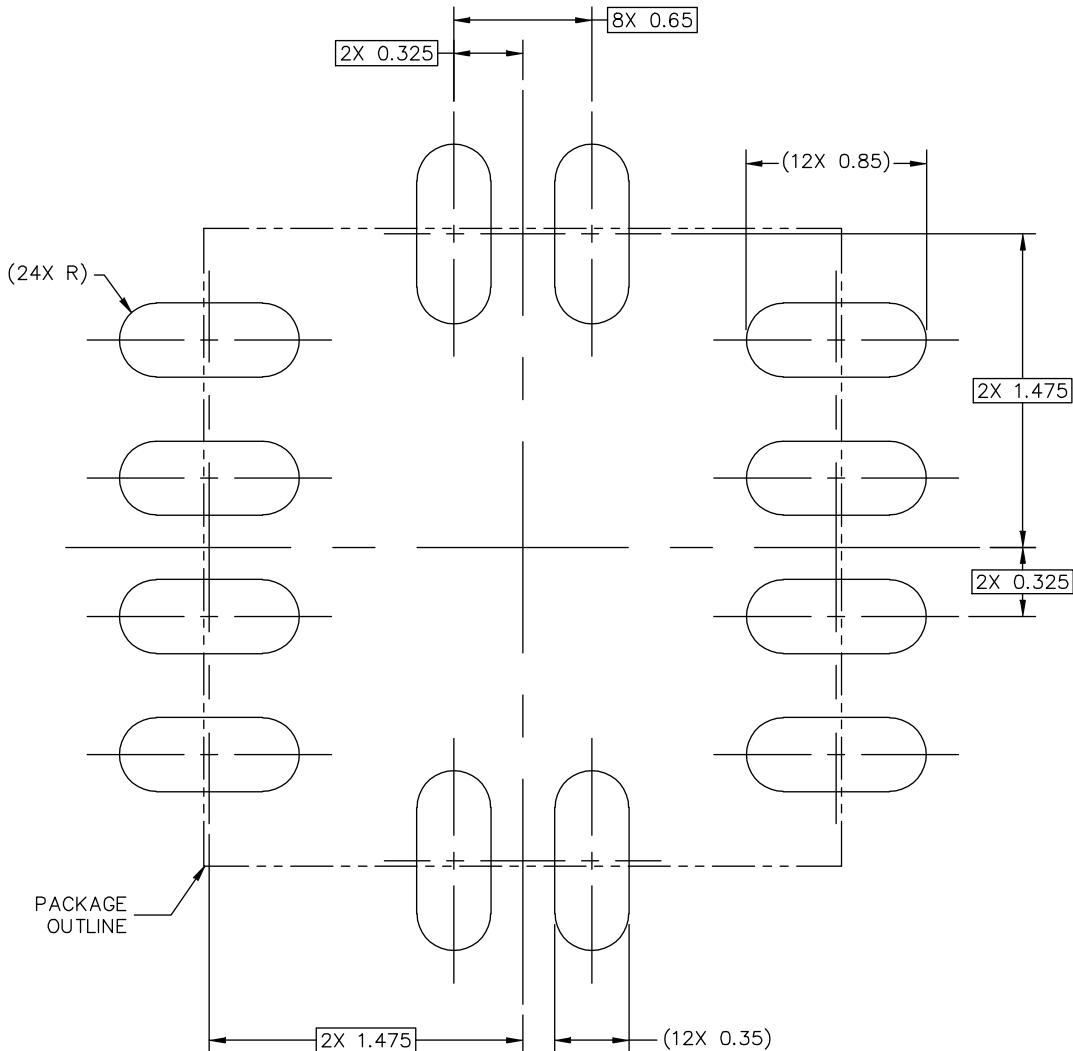SOT2197-1(SC)



PCB DESIGN GUIDELINES – I/O PADS AND SOLDERABLE AREA

THIS SHEET SERVES ONLY AS A GUIDELINE TO HELP DEVELOP A USER SPECIFIC SOLUTION.
DEVELOPMENT EFFORT WILL STILL BE REQUIRED BY END USERS TO OPTIMIZE PCB MOUNTING
PROCESSES AND BOARD DESIGN IN ORDER TO MEET INDIVIDUAL/SPECIFIC REQUIREMENTS.

© NXP B.V. ALL RIGHTS RESERVED


DATE: 17 JAN 2024

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: NON-JEDEC	DRAWING NUMBER: 98ASA01979D	REVISION: B	
--	------------------------	--------------------------------	----------------	--

Figure 33. PCB footprint guidelines

PQFN-12 I/O STEP-CUT WETTABLE FLANK
3 X 3 X 1.25 PKG, 0.65 PITCH

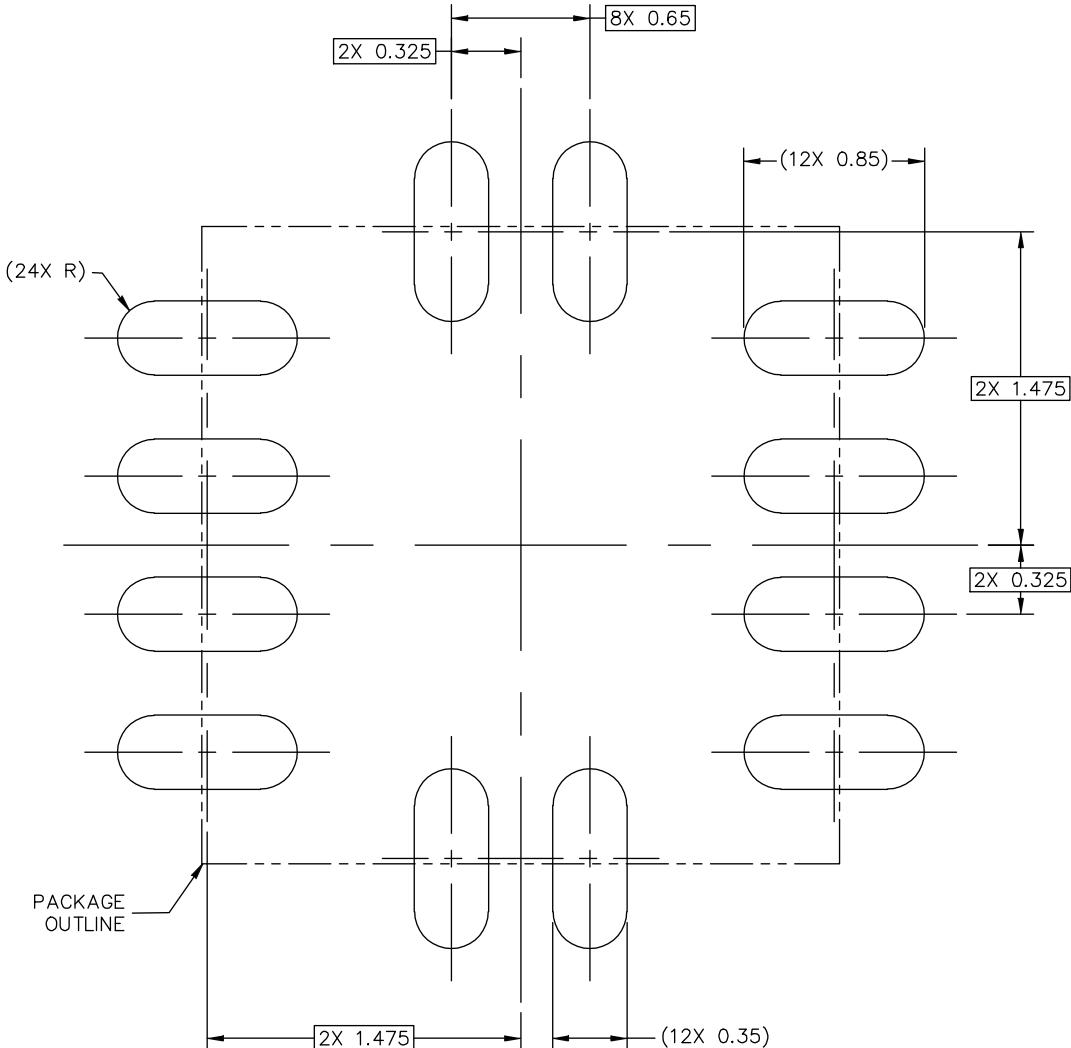SOT2197-1(SC)



RECOMMENDED STENCIL THICKNESS 0.125 OR 0.15

PCB DESIGN GUIDELINES – SOLDER PASTE STENCIL

THIS SHEET SERVES ONLY AS A GUIDELINE TO HELP DEVELOP A USER SPECIFIC SOLUTION. DEVELOPMENT EFFORT WILL STILL BE REQUIRED BY END USERS TO OPTIMIZE PCB MOUNTING PROCESSES AND BOARD DESIGN IN ORDER TO MEET INDIVIDUAL/SPECIFIC REQUIREMENTS.

© NXP B.V. ALL RIGHTS RESERVED		DATE: 17 JAN 2024	
MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: NON-JEDEC	DRAWING NUMBER: 98ASA01979D	REVISION: B

Note: To achieve optimum sensor performance over Temperature, it is important that no solder flux residues got trapped between the PCB and the bottom of the sensor package.

A proper flux cleaning process is desirable after reflow soldering.

Cleaning effectiveness can be facilitated by maximizing the gap between sensor and PCB. This is achieved by removing any copper trace and Solder mask under sensor package, as well as using a thick solder paste stencil.

17 Glossary

Table 121. Glossary

Term	Description
Cross-axis sensitivity	Cross-axis sensitivity is the ratio of the measured acceleration for an axis to the input acceleration along each axis orthogonal to the measured axis. Cross-axis sensitivity leads to undesirable nonorthogonality of X, Y, and Z axes in the frame of reference of the assembled device when mapping to other frames of reference. Cross-axis sensitivity is expressed as a percentage of the orthogonal input acceleration with six separate cross-axis sensitivity terms known as Sxy, Sxz, Syx, Syz, Szx, and Szy.
Noise density and RMS-integrated noise	Noise density is defined as the noise per unit of square root bandwidth and is typically expressed in units of mg/ $\sqrt{\text{Hz}}$ or $\mu\text{g}/\sqrt{\text{Hz}}$ for a consumer grade accelerometer. Noise is measured with the device held stationary in a 1g field and isolated from environmental noise and mechanical vibration. The RMS noise at a given ODR can be estimated as follows: $N_{rms} = ND * \sqrt{BW}$ For example, in the $\pm 2 \text{ g}$ FSR, operating in HPM with an ODR of 400 Hz, the estimated RMS noise would be: $N_{rms} = 230 \mu\text{g}/\sqrt{\text{Hz}} * \sqrt{(400/2) \text{ Hz}} = 3.25 \text{ mg} (\sim 3.3 \text{ LSB}).$
Output data rate, decimation factor, and power consumption	The Output Data Rate (ODR) defines the rate at which acceleration data is output from FXLS8971CF. Depending on the operating mode and ODR that is selected, different decimation factors (oversampling ratios) are applied. The decimated output data is supplied at the ODR rate, even though multiple samples of the sensor data may have been used to calculate this average result. In FXLS8971CF lowest power mode, the decimation factor is always 1, leading to the best power performance at the expense of the poorest noise (resolution) performance. In high performance mode, the decimation factor is automatically increased to the maximum possible value for a given ODR, resulting in the best noise (resolution) performance at the expense of the poorest power consumption. In motion detection mode with BT_MODE=V _{DD} , use of HPM or FPM mode is not advised. Only the default LPM mode should be used.
Primary	Device that initiates and drives the communication with secondary devices.
Secondary	Device or devices that responds to communication initiated by primary device.
Self-Test	The integrated self-test function can be used to verify correct transducer and signal chain operation without the need to apply an external acceleration stimulus. When the self-test function is activated for each axis, an electrostatic actuation force is applied to the proof mass, simulating a small change in acceleration. The self-test function of the device is independently exercisable for each axis, along with a selectable displacement direction (polarity). The device need not be static while exercising the self-test function as it is insensitive to any external physical acceleration. During a self-test sequence, 2 parameters are computed for each axis, namely STOC and STOF. STOC is the half difference between Self-Test output for positive direction (ST_POL=0) and Self-Test output for negative direction (ST_POL=1), whereas STOF is the half sum between the same. Refer to AN13193 [2] for more details on self-test.
Sensitivity	The accelerometer sensitivity, also known as <i>scale-factor</i> , represents the change in acceleration input corresponding to 1 LSB change in output and is typically measured in either mg/LSB or LSB/g.
Zero-g offset	The accelerometer zero-g offset describes the deviation of the sensor output from the ideal 0 g value when no motion or gravity is acting on it. With an accelerometer stationary and placed on a level, horizontal surface, the ideal output is 0 g for the X and Y axes. Likewise, if the accelerometer is placed on a vertical plane, the ideal output is 0 g for the Z-axis. The deviation of each output from the ideal value is called <i>zero-g offset</i> . Offset is, to some extent, a result of stress on the sensor and how well the sensor is leveled when soldered to the board. Therefore, the zero-g offset can change after mounting the sensor onto a printed circuit board or exposing it to extensive mechanical stress. For applications that require increased precision, any residual post-board mount offset may be removed using the OFF_X/Y/Z registers, or alternatively, in the host application software.

18 References

- [1] AN1902 — Assembly Guidelines for QFN and DFN Packages, <https://www.nxp.com/docs/en/application-note/AN1902.pdf>
- [2] AN13193 — Self-test procedure for FXLS896xAF and FXLS897xCF, <https://www.nxp.com/docs/en/application-note/AN13193.pdf>
- [3] UM10204 — I²C-bus specification and user manual, <https://www.nxp.com/docs/en/user-guide/UM10204.pdf>

Note: *Trademark property of NXP, used by STMicroelectronics under license*

Revision history

Table 122. Document revision history

Date	Version	Changes
01-Feb-2026	1	Initial release from ST, rebranded NXP document

Contents

1	Ordering information	3
1.1	Ordering options	3
2	Block diagram	4
3	Pinning information	5
3.1	Pinning	5
3.2	Pinning description	5
3.3	Orientation	7
4	Limiting values	8
5	Recommended operating conditions	9
6	Mechanical characteristics	10
7	Electrical characteristics	14
8	Temperature sensor characteristics	16
9	I²C digital interface	17
9.1	I ² C interface characteristics	17
9.1.1	General I ² C operation	19
9.1.2	I ² C read/write operations	19
10	SPI interface	21
10.1	General SPI operation	21
10.2	SPI write operations with 3- or 4-wire mode	21
10.3	SPI read operations with 4-wire mode	22
10.4	SPI read operations with 3-wire mode	22
10.5	SPI timing specifications (4-wire mode and 3-wire hardwired modes)	23
10.6	SPI timing specifications (software enabled 3-wire mode)	24
11	Operating modes	25
12	Register descriptions	32
12.1	Complete register map	32
12.2	Data and status read registers	35
12.2.1	INT_STATUS register (address 00h)	35
12.2.2	TEMP_OUT register (address 01h)	37
12.2.3	VECM_LSB register (address 02h)	37
12.2.4	VECM_MSB register (address 03h)	38
12.2.5	OUT_X_LSB, OUT_X_MSB, OUT_Y_LSB, OUT_Y_MSB, OUT_Z_LSB, OUT_Z_MSB registers (addresses 04h to 09h)	39
12.2.6	BUF_STATUS register (address 0Bh)	41

12.2.7	BUF_X_LSB, BUF_X_MSB, BUF_Y_LSB, BUF_Y_MSB, BUF_Z_LSB, BUF_Z_MSB (addresses 0Ch to 11h)	42
12.2.8	PROD_REV register (address 12h)	44
12.2.9	WHO_AM_I register (address 13h)	44
12.2.10	SYS_MODE register (address 14h)	45
12.3	Sensor main configuration registers	47
12.3.1	SENS_CONFIG1 register (address 15h)	47
12.3.2	SENS_CONFIG2 register (address 16h)	49
12.3.3	SENS_CONFIG3 register (address 17h)	51
12.3.4	SENS_CONFIG4 register (address 18h)	54
12.3.5	SENS_CONFIG5 register (address 19h)	57
12.3.6	WAKE_IDLE_LSB register (address 1Ah)	58
12.3.7	WAKE_IDLE_MSB register (address 1Bh)	58
12.3.8	SLEEP_IDLE_LSB register (address 1Ch)	58
12.3.9	SLEEP_IDLE_MSB register (address 1Dh)	58
12.3.10	ASLP_COUNT_LSB, ASLP_COUNT_MSB registers (addresses 1Eh to 1Fh)	59
12.3.11	INT_EN register (address 20h)	61
12.3.12	INT_PIN_SEL register (address 21h)	63
12.3.13	OFF_X, OFF_Y, OFF_Z registers (addresses 22h to 24h)	64
12.3.14	BUF_CONFIG1 register (address 26h)	65
12.3.15	BUF_CONFIG2 register (address 27h)	67
12.4	Orientation detection settings registers	68
12.4.1	ORIENT_STATUS register (address 28h)	68
12.4.2	ORIENT_CONFIG register (address 29h)	69
12.4.3	ORIENT_DBCOUNT register (address 2Ah)	70
12.4.4	ORIENT_BF_ZCOMP register (address 2Bh)	71
12.4.5	ORIENT_THS register (address 2Ch)	72
12.5	Sensor Data Change Detection (SDCD) registers	74
12.5.1	SDCD_INT_SRC1 register (address 2Dh)	75
12.5.2	SDCD_INT_SRC2 register (address 2Eh)	77
12.5.3	SDCD_CONFIG1 register (address 2Fh)	79
12.5.4	SDCD_CONFIG2 register (address 30h)	81
12.5.5	SDCD_OT_DBCNT register (address 31h)	83
12.5.6	SDCD_WT_DBCNT register (address 32h)	83
12.5.7	SDCD_LTHS_LSB register (address 33h)	84
12.5.8	SDCD_LTHS_MSB register (address 34h)	84
12.5.9	SDCD_UTHS_LSB register (address 35h)	85
12.5.10	SDCD_UTHS_MSB register (address 36h)	85

12.6	Self-test configuration registers	86
12.6.1	SELF_TEST_CONFIG1 register (address 37h)	86
12.6.2	SELF_TEST_CONFIG2 register (address 38h)	87
13	Application information	88
13.1	System connections	88
13.2	Recommendation for reading data registers	88
13.3	Typical application circuits	88
13.4	Power supply considerations	91
14	Package outline	92
14.1	Package description	92
14.2	Burr specification	94
15	Soldering information	95
15.1	Printed circuit board layout and device mounting	95
15.1.1	Overview of soldering considerations	95
15.1.2	Halogen content	95
16	Mounting information	96
16.1	PCB mounting recommendations	96
17	Glossary	100
18	References	101
	Revision history	102
	List of figures	106
	List of tables	107

List of figures

Figure 1.	Block Diagram	4
Figure 2.	Pin configuration diagram	5
Figure 3.	Sensitive axes orientation and output response to $\pm 1\text{ g}$ (gravity) stimulus	7
Figure 4.	Offset drift vs. temperature	12
Figure 5.	XYZ_TCO histograms	13
Figure 6.	XYZ_TCS histograms	13
Figure 7.	I ² C secondary timing diagram for Standard-mode, Fast-mode and Fast-mode Plus	18
Figure 8.	I ² C Data Sequence Diagrams	20
Figure 9.	SPI single-byte write protocol diagram (3- or 4-wire mode), R/W = 0	21
Figure 10.	SPI multiple-byte write protocol diagram (3- or 4-wire mode), R/W = 0	21
Figure 11.	SPI single-byte read protocol diagram (4-wire mode), R/W = 1	22
Figure 12.	SPI multiple-byte read protocol diagram (4-wire mode), R/W = 1	22
Figure 13.	SPI single-byte read protocol diagram (3-wire mode)	22
Figure 14.	SPI multiple-byte read protocol diagram (3-wire mode)	23
Figure 15.	SPI timing diagram (4-wire mode)	23
Figure 16.	SPI timing diagram (3-wire mode)	24
Figure 17.	Operating modes transition diagram	27
Figure 18.	BOOT2 sequence and One-wire motion-detection protocol diagram (BT_MODE = V _{DD})	29
Figure 19.	BOOT1 sequence (BT_MODE = GND)	31
Figure 20.	SDCD Function Block Diagram	74
Figure 21.	SDCD REF_UPD timing diagram	82
Figure 22.	Typical Application Circuit #1 – I ² C mode	88
Figure 23.	Typical Application Circuit #2 – SPI 4-wire mode	89
Figure 24.	Typical Application Circuit #3 – SPI 3-wire mode (software enabled; SENS_CONFIG1[SPI_M] = 1)	89
Figure 25.	Typical Application Circuit #4 – SPI 3-wire mode (hardwired; SENS_CONFIG1[SPI_M] = X)	89
Figure 26.	Typical Application Circuit #5 – Motion detection mode (no serial interface)	90
Figure 27.	Typical Application Circuit #6 - Motion detection mode (with SPI 3-wire interface, software enabled)	90
Figure 28.	FXLS8971CF package outline	92
Figure 29.	FXLS8971CF package outline detail	93
Figure 30.	FXLS8971CF package outline notes	94
Figure 31.	PCB design guidelines - Solder mask opening pattern	97
Figure 32.	PCB design guideline - I/O pads and solderable area	98
Figure 33.	PCB footprint guidelines	99

List of tables

Table 1.	Ordering information	3
Table 2.	Ordering options	3
Table 3.	Pin descriptions	5
Table 4.	Device absolute maximum ratings	8
Table 5.	ESD and latch-up-protection characteristics	8
Table 6.	Nominal operating conditions	9
Table 7.	Accelerometer sensor performance parameters	10
Table 8.	Electrical characteristics	14
Table 9.	Temperature sensor performance parameters	16
Table 10.	I ² C serial interface pin description	17
Table 11.	FXLS8971CF I ² C read and write addresses	17
Table 12.	I ² C secondary timing values for Standard-mode (Sm), Fast-mode (Fm), and Fast-mode Plus (Fm+)	17
Table 13.	Secondary timing values	23
Table 14.	Secondary timing values	24
Table 15.	FXLS8971CF operating modes descriptions	25
Table 16.	Operating modes transition criteria	28
Table 17.	BOOT2 sequence and One-wire motion protocol phase descriptions	30
Table 18.	One-wire motion protocol threshold selections	30
Table 19.	BOOT1 sequence description (BT_MODE = GND)	31
Table 20.	Register address map	32
Table 21.	INT_STATUS register (address 00h) bit allocation	35
Table 22.	INT_STATUS register (address 00h) bit description	35
Table 23.	TEMP_OUT register (address 01h) bit allocation	37
Table 24.	VECM_LSB register (address 02h) bit allocation	37
Table 25.	VECM_LSB register (address 02h) bit description	37
Table 26.	VECM_MSB register (address 03h) bit allocation	38
Table 27.	VECM_MSB register (address 03h) bit description	38
Table 28.	OUT_X_LSB and OUT_X_MSB register (addresses 04h to 05h) with SEN_CONFIG2[LE_BE] = 0 bit allocation	39
Table 29.	OUT_Y_LSB and OUT_Y_MSB register (addresses 06h to 07h) with SEN_CONFIG2[LE_BE] = 0 bit allocation	39
Table 30.	OUT_Z_LSB and OUT_Z_MSB register (addresses 08h to 09h) with SEN_CONFIG2[LE_BE] = 0 bit allocation	40
Table 31.	OUT_X_LSB and OUT_X_MSB register (addresses 04h to 05h) with SEN_CONFIG2[LE_BE] = 1 bit allocation	40
Table 32.	OUT_Y_LSB and OUT_Y_MSB register (addresses 06h to 07h) with SEN_CONFIG2[LE_BE] = 1 bit allocation	40
Table 33.	OUT_Z_LSB and OUT_Z_MSB register (addresses 08h to 09h) with SEN_CONFIG2[LE_BE] = 1 bit allocation	40
Table 34.	BUF_STATUS register (address 0Bh) bit allocation	41
Table 35.	BUF_STATUS register (address 0Bh) bit description	41
Table 36.	BUF_X_LSB and BUF_X_MSB registers (addresses 0Ch, 0Dh) with SENS_CONFIG2[LE_BE] = 0 bit allocation	42
Table 37.	BUF_Y_LSB and BUF_Y_MSB registers (addresses 0Eh, 0Fh) with SENS_CONFIG2[LE_BE] = 0 bit allocation	42
Table 38.	BUF_Z_LSB and BUF_Z_MSB registers (addresses 10h, 11h) with SENS_CONFIG2[LE_BE] = 0 bit allocation	43
Table 39.	BUF_X_LSB and BUF_X_MSB registers (addresses 0Ch, 0Dh) with SENS_CONFIG2[LE_BE] = 1 bit allocation	43
Table 40.	BUF_Y_LSB and BUF_Y_MSB registers (addresses 0Eh, 0Fh) with SENS_CONFIG2[LE_BE] = 1 bit allocation	43
Table 41.	BUF_Z_LSB and BUF_Z_MSB registers (addresses 10h, 11h) with SENS_CONFIG2[LE_BE] = 1 bit allocation	43
Table 42.	PROD_REV register (address 12h) bit allocation	44
Table 43.	PROD_REV register (address 12h) bit description	44
Table 44.	WHO_AM_I register (address 13h) bit allocation	44
Table 45.	SYS_MODE register (address 14h) bit allocation	45
Table 46.	SYS_MODE register (address 14h) bit description	45
Table 47.	SENS_CONFIG1 register (address 15h) bit allocation	47
Table 48.	SENS_CONFIG1 register (address 15h) bit description	47
Table 49.	SENS_CONFIG2 register (address 16h) bit allocation	49
Table 50.	SENS_CONFIG2 register (address 16h) bit description	49
Table 51.	SENS_CONFIG3 register (address 17h) bit allocation	51
Table 52.	WAKE and SLEEP low-power mode ODR and decimation settings	51
Table 53.	WAKE and SLEEP High Performance mode ODR and decimation settings	52

Table 54. WAKE and SLEEP decimation settings in Flexible Power mode	52
Table 55. SENS_CONFIG4 register (address 18h) bit allocation	54
Table 56. SENS_CONFIG4 register (address 18h) bit description	54
Table 57. INTx pin behavior as a function of INT_PP_OD and INT_POL bit settings (valid only when BT_MODE = V _{DD})	55
Table 58. INTx pin behavior as a function of INT_PP_OD and INT_POL bit settings (valid only when BT_MODE = V _{DD})	56
Table 59. SENS_CONFIG5 register (address 19h) bit allocation	57
Table 60. SENS_CONFIG5 register (address 19h) bit description	57
Table 61. WAKE_IDLE_LSB register (address 1Ah) bit allocation	58
Table 62. WAKE_IDLE_MSB register (address 1Bh) bit allocation	58
Table 63. SLEEP_IDLE_LSB register (address 1Ch) bit allocation	58
Table 64. SLEEP_IDLE_MSB register (address 1Dh) bit allocation	58
Table 65. ASLP_COUNT_LSB register (address 1Eh) bit allocation	59
Table 66. ASLP_COUNT_LSB register (address 1Eh) bit description	59
Table 67. ASLP_COUNT_MSB register (address 1Fh) bit allocation	59
Table 68. ASLP_COUNT_MSB register (address 1Fh) bit description	59
Table 69. ASLP_COUNT timer period	59
Table 70. Auto-WAKE/SLEEP Interrupt Event Sources	60
Table 71. INT_EN register (address 20h) bit allocation	61
Table 72. INT_EN register (address 20h) bit description	61
Table 73. INT_PIN_SEL register (address 21h) bit allocation	63
Table 74. INT_PIN_SEL register (address 21h) bit description	63
Table 75. OFF_X register (addresses 22h) bit allocation	64
Table 76. OFF_Y register (addresses 23h) bit allocation	64
Table 77. OFF_Z register (addresses 24h) bit allocation	64
Table 78. BUF_CONFIG1 register (address 26h) bit allocation	65
Table 79. BUF_CONFIG1 register (address 26h) bit description	65
Table 80. BUF_CONFIG2 register (address 27h) bit allocation	67
Table 81. BUF_CONFIG2 register (address 27h) bit description	67
Table 82. ORIENT_STATUS register (address 28h) bit allocation	68
Table 83. ORIENT_STATUS register (address 28h) bit description	68
Table 84. ORIENT_CONFIG register (address 29h) bit allocation	69
Table 85. ORIENT_CONFIG register (address 29h) bit description	69
Table 86. ORIENT_DBCOUNT register (address 2Ah) bit allocation	70
Table 87. ORIENT_DBCOUNT register (address 2Ah) bit description	70
Table 88. ORIENT_BF_ZCOMP register (address 2Bh) bit allocation	71
Table 89. ORIENT_BF_ZCOMP register (address 2Bh) bit description	71
Table 90. ORIENT_ZLOCK lockout angles	71
Table 91. ORIENT Back/Front orientation transition angle definitions	71
Table 92. ORIENT_THS register (address 2Ch) bit allocation	72
Table 93. Orientation change trip angles look-up table	72
Table 94. Resultant trip angle (threshold angle \pm hysteresis angle)	73
Table 95. Orientation change ideal orientation angle definitions	73
Table 96. SDCD_INT_SRC1 register (address 2Dh) bit allocation	75
Table 97. SDCD_INT_SRC1 register (address 2Dh) bit description	75
Table 98. SDCD_INT_SRC2 register (address 2Eh) bit allocation	77
Table 99. SDCD_INT_SRC2 register (address 2Eh) bit description	77
Table 100. SDCD_CONFIG1 register (address 2Fh) bit allocation	79
Table 101. SDCD_CONFIG1 register (address 2Fh) bit description	79
Table 102. SDCD_CONFIG2 register (address 30h) bit allocation	81
Table 103. SDCD_CONFIG2 register (address 30h) bit description	81
Table 104. SDCD_OT_DBCNT register (address 31h) bit allocation	83
Table 105. SDCD_OT_DBCNT register (address 31h) bit description	83
Table 106. SDCD_WT_DBCNT register (address 32h) bit allocation	83
Table 107. SDCD_WT_DBCNT register (address 32h) bit description	83
Table 108. SDCD_LTHS_LSB register (address 33h) bit allocation	84

Table 109. SDCD_LTHS_LSB register (address 33h) bit description	84
Table 110. SDCD_LTHS_MSB register (address 34h) bit allocation	84
Table 111. SDCD_LTHS_MSB register (address 34h) bit description	84
Table 112. SDCD_UTHS_LSB register (address 35h) bit allocation	85
Table 113. SDCD_UTHS_LSB register (address 35h) bit description	85
Table 114. SDCD_UTHS_MSB register (address 36h) bit allocation	85
Table 115. SDCD_UTHS_MSB register (address 36h) bit description	85
Table 116. SELF_TEST_CONFIG1 register (address 37h) bit allocation	86
Table 117. SELF_TEST_CONFIG1 register (address 37h) bit description	86
Table 118. SELF_TEST_CONFIG2 register (address 38h) bit allocation	87
Table 119. SELF_TEST_CONFIG2 register (address 38h) bit description	87
Table 120. Self-Test measurement phase decimation settings	87
Table 121. Glossary	100
Table 122. Document revision history	102

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice.

In the event of any conflict between the provisions of this document and the provisions of any contractual arrangement in force between the purchasers and ST, the provisions of such contractual arrangement shall prevail.

The purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

The purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of the purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

If the purchasers identify an ST product that meets their functional and performance requirements but that is not designated for the purchasers' market segment, the purchasers shall contact ST for more information.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2026 STMicroelectronics – All rights reserved