


Introduction

With the STM32F413 Discovery kit (32F413HDISCOVERY), users develop applications easily on the STM32F4 series high-performance microcontrollers based on Arm[®] Cortex[®]-M4 core. The Discovery kit combines the STM32F413 features with 240×240 pixel LCD with touch panel, LEDs, I²S audio codec, MEMS microphones, USB OTG FS, Quad-SPI NOR flash memory, and microSD[™] card connector.

An embedded ST-LINK/V2-1 debugger/programmer is included. Specialized add-on boards can be connected through the ARDUINO[®] Uno V3 or expansion connectors.

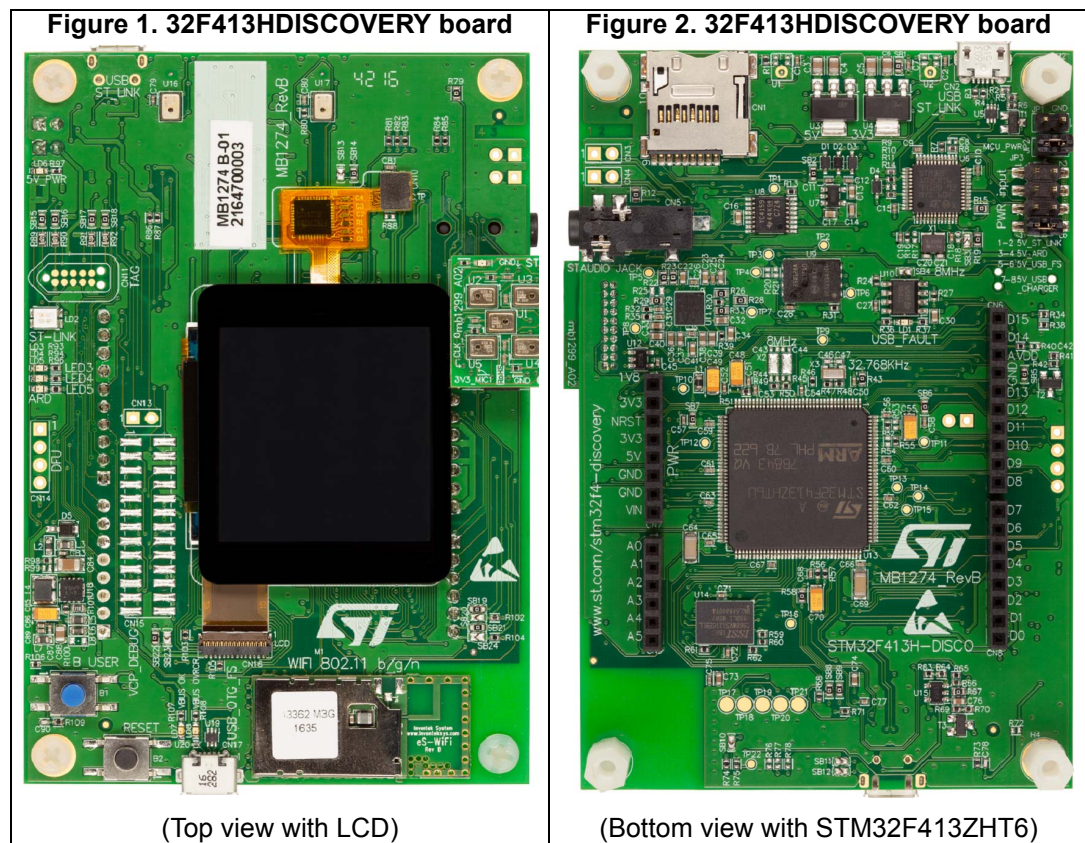

Pictures are not contractual.

Contents

| | | |
|----------|---|-----------|
| 1 | Features | 6 |
| 2 | Ordering information | 6 |
| | 2.1 Codification | 7 |
| 3 | Development environment | 8 |
| | 3.1 System requirements | 8 |
| | 3.2 Development toolchains | 8 |
| | 3.3 CAD resources | 8 |
| 4 | Conventions | 9 |
| 5 | Safety recommendations | 10 |
| | 5.1 Targeted audience | 10 |
| | 5.2 Handling the board | 10 |
| 6 | Hardware layout and configuration | 11 |
| | 6.1 32F413HDISCOVERY Discovery kit layout | 12 |
| | 6.2 Embedded ST-LINK/V2-1 | 13 |
| | 6.2.1 Drivers | 14 |
| | 6.2.2 ST-LINK/V2-1 firmware upgrade | 14 |
| | 6.2.3 Power supply | 14 |
| | 6.3 Programming/debugging when the power supply is not from ST-LINK/V2-1 | 16 |
| | 6.4 Clock sources | 17 |
| | 6.5 Reset sources | 17 |
| | 6.6 Audio | 17 |
| | 6.7 USB OTG FS | 18 |
| | 6.8 microSD™ card | 18 |
| | 6.9 PSRAM memory | 18 |
| | 6.10 Quad-SPI NOR flash memory | 18 |
| | 6.11 Virtual COM port | 18 |
| | 6.12 LCD | 19 |

| | | |
|-----------|--|-----------|
| 6.13 | Capacitive control touch panel | 19 |
| 6.14 | Wi-Fi® 802.11 b/g/n module | 19 |
| 6.15 | Buttons and LEDs | 20 |
| 7 | Connectors | 21 |
| 7.1 | ARDUINO® Uno V3 connectors | 21 |
| 7.2 | USB OTG FS Micro-AB connector (CN17) | 23 |
| 7.3 | LCD connector (CN16) | 24 |
| 7.4 | Touch-panel connector (CN10) | 25 |
| 7.5 | microSD™ connector (CN1) | 26 |
| 7.6 | ST-LINK/V2-1 USB Micro-AB connector (CN2) | 27 |
| 7.7 | TAG connector (CN11) | 28 |
| 7.8 | Audio line output (green jack) connector (CN5) | 29 |
| 7.9 | Extension microphone connector (CN12) | 30 |
| 7.10 | Optional audio stereo speakers (CN3 and CN4) | 31 |
| 8 | 32F413HDISCOVERY I/O assignment | 32 |
| 9 | 32F413HDISCOVERY board information | 37 |
| 9.1 | Product marking | 37 |
| 9.2 | 32F413HDISCOVERY product history | 38 |
| 9.3 | Board revision history | 39 |
| 10 | Federal Communications Commission (FCC) and ISED Canada Compliance Statements | 40 |
| 10.1 | FCC Compliance Statement | 40 |
| 10.2 | ISED Compliance Statement | 41 |
| 11 | UKCA Compliance Statement | 42 |
| 12 | RED Compliance Statement | 43 |
| 13 | Product disposal | 44 |
| | Revision history | 45 |

List of tables

| | | |
|-----------|---|----|
| Table 1. | List of available products | 6 |
| Table 2. | Codification explanation | 7 |
| Table 3. | ON/OFF conventions | 9 |
| Table 4. | Assignment of the control ports to the LED indicators | 20 |
| Table 5. | Pinout of the ARDUINO® connector | 21 |
| Table 6. | USB OTG Micro-AB pinout (front view) | 23 |
| Table 7. | USB OTG FS power management | 23 |
| Table 8. | Pinout of the LCD connector | 24 |
| Table 9. | Backlight power management | 25 |
| Table 10. | Pinout of the touch panel | 26 |
| Table 11. | Pinout of the microSD™ connector | 27 |
| Table 12. | USB Micro-AB connector | 28 |
| Table 13. | Pinout of the TAG connector | 29 |
| Table 14. | Audio jack connector | 29 |
| Table 15. | Extension microphone connector | 30 |
| Table 16. | 32F413HDISCOVERY I/O assignment | 32 |
| Table 17. | Product history | 38 |
| Table 18. | Board revision history | 39 |
| Table 19. | Document revision history | 45 |

List of figures

| | | |
|------------|--|----|
| Figure 1. | 32F413HDISCOVERY board | 1 |
| Figure 2. | 32F413HDISCOVERY board | 1 |
| Figure 3. | Hardware block diagram | 11 |
| Figure 4. | 32F413HDISCOVERY Discovery kit (top side) | 12 |
| Figure 5. | 32F413HDISCOVERY Discovery kit (bottom side) | 13 |
| Figure 6. | USB composite device | 14 |
| Figure 7. | JP3: 5V_ST_LINK selection | 15 |
| Figure 8. | JP3: 5V_ARD selection from CN7 (VIN_5V_ARD) | 15 |
| Figure 9. | JP3: 5V_USB_FS | 15 |
| Figure 10. | JP3: 5V_USB_CHARGER selection | 16 |
| Figure 11. | Wi-Fi [®] module | 19 |
| Figure 12. | ARDUINO [®] connector (top view) | 21 |
| Figure 13. | USB OTG FS Micro-AB connector (front view) | 23 |
| Figure 14. | LCD connector | 24 |
| Figure 15. | Touch panel connector pinout | 25 |
| Figure 16. | microSD [™] connector (front view) | 26 |
| Figure 17. | USB Micro-AB connector (front view) | 27 |
| Figure 18. | TAG connector | 28 |
| Figure 19. | TC2050-IDC-NL cable | 28 |
| Figure 20. | Audio jack connector (front view) | 29 |
| Figure 21. | Extension microphone connector (front view) | 30 |

1 Features

- STM32F413ZHT6 microcontroller with 1.5 Mbytes of flash memory and 320 Kbytes of SRAM, in an LQFP144 package
- 240x240-pixel LCD with a parallel interface and capacitive touch panel
- Integrated Wi-Fi[®] module (802.11 b/g/n compliant)
- USB OTG FS
- I²S audio codec
- Stereo digital ST-MEMS microphones
- 8-Mbit 16-bit wide PSRAM
- 128-Mbit Quad-SPI NOR flash memory
- 2 color user LEDs
- User and reset push-buttons
- Board connectors:
 - microSD[™] card
 - User USB with Micro-AB
 - Jack for audio line with microphone input and stereo output
 - Expansion connector to embedded MEMS microphone daughterboard featuring five MEMS microphones
 - ARDUINO[®] Uno V3 expansion connectors
- Flexible power-supply options: ST-LINK USB V_{BUS}, user USB FS connector, or external sources
- Comprehensive free software libraries and examples available with the STM32Cube MCU Package
- On-board ST-LINK/V2-1 debugger/programmer with USB re-enumeration capability: mass storage, Virtual COM port, and debug port
- Support of a wide choice of Integrated Development Environments (IDEs) including IAR Embedded Workbench[®], MDK-ARM, and STM32CubeIDE

2 Ordering information

To order the 32F413HDISCOVERY Discovery kit, refer to [Table 1](#). For a detailed description, refer to its user manual on the product web page. Additional information is available from the datasheet and reference manual of the target microcontroller.

Table 1. List of available products

| Order code | Board reference | Target STM32 |
|------------------|--|---------------|
| STM32F413H-DISCO | MB1274 ⁽¹⁾ MB1299 ⁽²⁾ | STM32F413ZHT6 |

1. Main board
2. MEMS microphone daughterboard



2.1 Codification

The meaning of the codification is explained in [Table 2](#).

Table 2. Codification explanation

| STM32F4XXY-DISCO | Description | Example: STM32F413H-DISCO |
|-------------------------|--|----------------------------------|
| STM32F4 | MCU series in STM32 32-bit Arm Cortex MCUs | STM32F4 series |
| XX | MCU product line in the series | STM32F413 |
| Y | STM32 flash memory size: H for 1.5 Mbytes | 1.5 Mbytes |
| DISCO | Discovery kit | Discovery kit |

3 Development environment

The 32F413HDISCOVERY Discovery kit runs with the STM32F413ZHT6 32-bit microcontroller based on the Arm^{®(a)} Cortex[®]-M4 core.



3.1 System requirements

- Multi-OS support: Windows[®] 10, Linux^{®(b)} 64-bit, or macOS^{®(c)(d)}
- USB Type-A or USB Type-C[®] to Micro-B cable

3.2 Development toolchains

- IAR Systems[®] - IAR Embedded Workbench^{®(e)}
- Keil[®] - MDK-ARM^(e)
- STMicroelectronics - STM32CubeIDE

3.3 CAD resources

All board design resources, including schematics, CAD databases, manufacturing files, and the bill of materials, are available from the 32F413HDISCOVERY product page at www.st.com.

-
- a. Arm is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.
 - b. Linux is a registered trademark of Linus Torvalds.
 - c. macOS is a trademark of Apple Inc. registered in the U.S. and other countries.
 - d. All other trademarks are the property of their respective owners.
 - e. On Windows[®] only.

4 Conventions

[Table 3](#) defines some conventions used in the present document.

Table 3. ON/OFF conventions

| Convention | Definition |
|-----------------------|---------------------------------------|
| Jumper JPx ON | Jumper fitted |
| Jumper JPx OFF | Jumper not fitted |
| Jumper JPx [1-2] | Jumper fitted between Pin 1 and Pin 2 |
| Solder bridge SBx ON | SBx connections closed by solder |
| Solder bridge SBx OFF | SBx connections left open |
| Resistor Rx ON | Resistor soldered |
| Resistor Rx OFF | Resistor not soldered |

5 Safety recommendations

5.1 Targeted audience

This product targets users with at least basic electronics or embedded software development knowledge such as engineers, technicians, or students. This board is not a toy and is not suited for use by children.

5.2 Handling the board


This product contains a bare printed circuit board and like all products of this type, the user must be careful about the following points:

- The connection pins on the board might be sharp. Be careful when handling the board to avoid hurting yourself.
- This board contains static-sensitive devices. To avoid damaging it, handle the board in an ESD-proof environment.
- While powered, do not touch the electric connections on the board with your fingers or anything conductive. The board operates at a voltage level that is not dangerous, but components might be damaged when shorted.
- Do not put any liquid on the board and avoid operating the board close to water or at a high humidity level.
- Do not operate the board if dirty or dusty.

6 Hardware layout and configuration

The 32F413HDISCOVERY Discovery kit is designed around the STM32F413ZH (144-pin in LQFP package). The hardware block diagram (refer to [Figure 3](#)) illustrates the connection between the STM32 and the peripherals (PSRAM, Quad-SPI flash memory, LCD connector, USB OTG connectors, USART, audio, microSD™ card, ARDUINO® Uno V3 shields, and embedded ST-LINK/V2-1). Refer to [Figure 4](#) and [Figure 5](#) to locate these features on the 32F413HDISCOVERY board.

Figure 3. Hardware block diagram

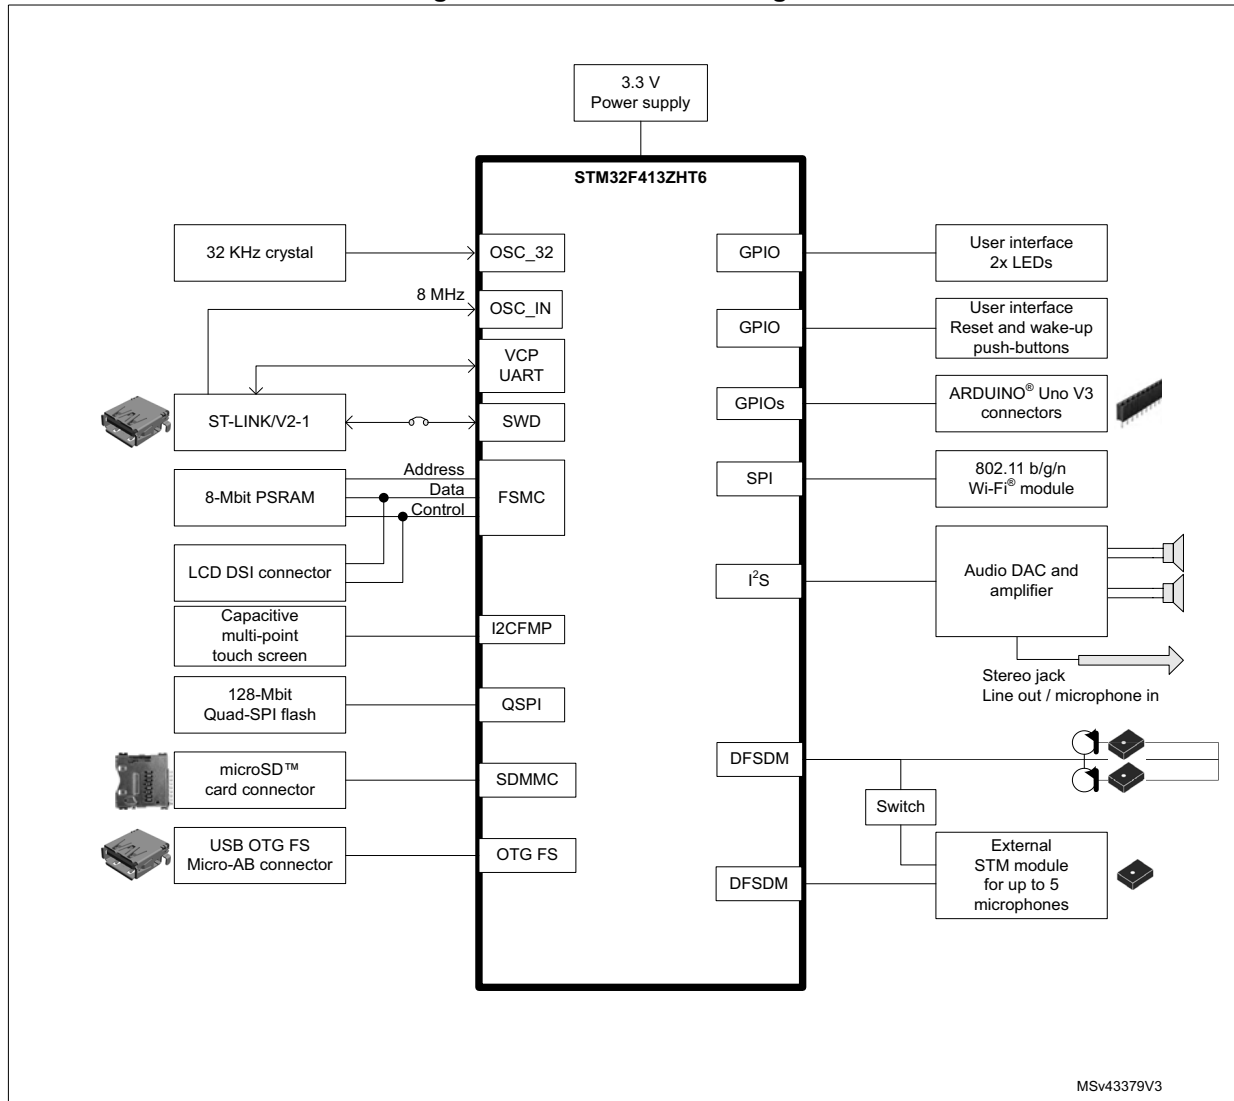

6.1 32F413HDISCOVERY Discovery kit layout

Figure 4. 32F413HDISCOVERY Discovery kit (top side)


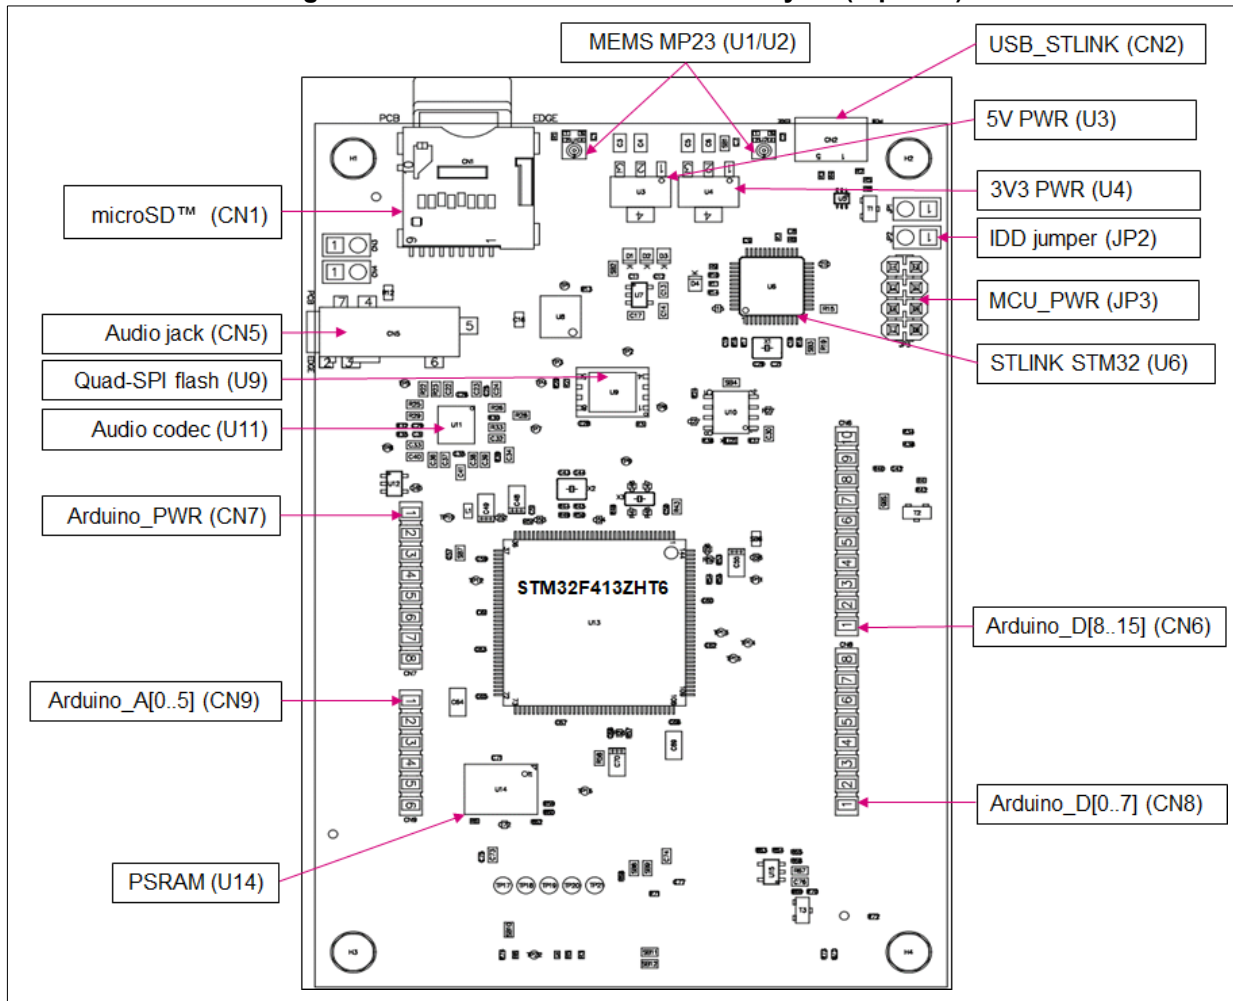


Figure 5. 32F413HDISCOVERY Discovery kit (bottom side)

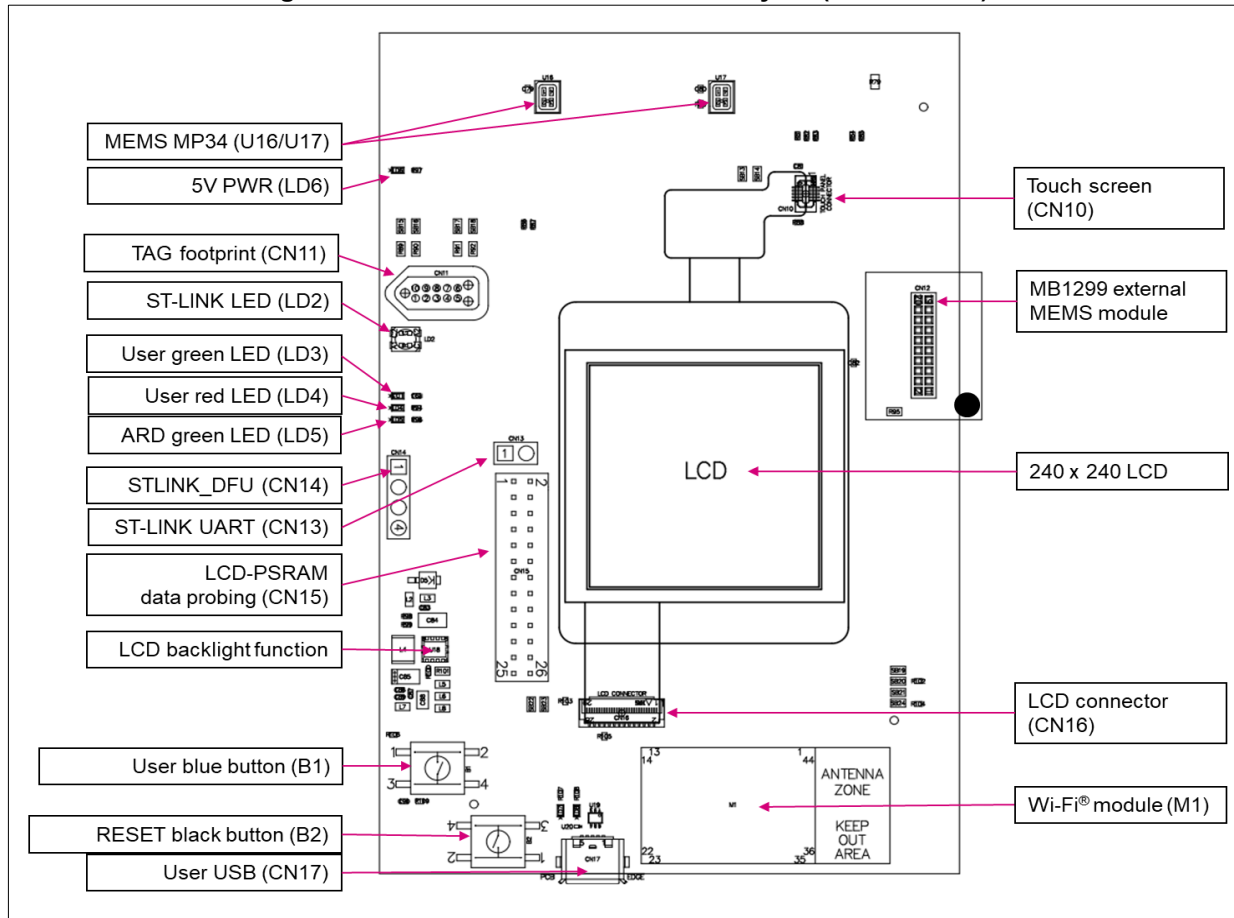

6.2 Embedded ST-LINK/V2-1

The ST-LINK/V2-1 programming and debugging tool is integrated on the 32F413HDISCOVERY Discovery kit. The new features supported on ST-LINK/V2-1 and not present on ST-LINK/V2 are listed below:

- USB software re-enumeration
- Virtual COM port interface on USB
- Mass storage interface on USB
- USB power management requests for more than 100 mA power on USB

These features are no longer supported on ST-LINK/V2-1:

- SWIM interface
- Application voltage lower than 3 V

For all general information concerning debugging and programming features common between V2 and V2-1 versions, refer to the user manual *ST-LINK/V2 in-circuit debugger/programmer for STM8 and STM32* (UM1075) at the www.st.com website.


6.2.1 Drivers

Before connecting the 32F413HDISCOVERY Discovery kit to a Windows® PC through a USB, a driver for the ST-LINK/V2-1 must be installed. It is available at the www.st.com website.

In case the 32F413HDISCOVERY Discovery kit is connected to the PC before the driver is installed, some 32F413HDISCOVERY interfaces might be declared as *unknown* in the PC device manager. To recover from this situation the user must install the driver files, and update the driver of the connected device from the device manager (refer to [Figure 6](#)).

Note: Prefer using the 'USB Composite Device' handle for a full recovery.

Figure 6. USB composite device

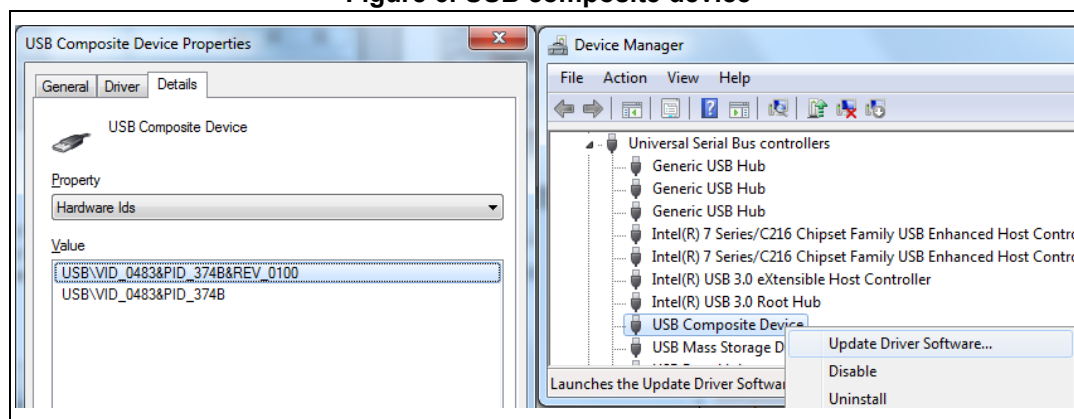

6.2.2 ST-LINK/V2-1 firmware upgrade

The ST-LINK/V2-1 embeds a firmware upgrade mechanism for in-place upgrades through the USB port. As the firmware might evolve during the lifetime of the ST-LINK/V2-1 product (for example new functionalities, bug fixes, and support for new microcontroller families), it is recommended to visit www.st.com before starting to use the 32F413HDISCOVERY Discovery kit and periodically, to stay updated with the latest firmware version.


6.2.3 Power supply

The 32F413HDISCOVERY Discovery kit is designed to be powered by a 5 V DC power supply. It is possible to configure the 32F413HDISCOVERY board to use any of the following four sources for the power supply:

- 5V_ST_LINK:** DC power from USB ST-LINK connector. The power source is the USB Micro-B connector of the ST-LINK/V2-1 (CN2). A jumper must be placed on pins 1 and 2 of JP3 (5V_ST_LINK on the silkscreen) to enable this power source (refer to [Figure 7](#)). It is the default setting. In this configuration, only the ST-LINK MCU is powered before the USB enumeration, because the host PC only provides 100 mA to the board. During the USB enumeration, the 32F413HDISCOVERY board asks for 500 mA power to the host PC. If the host can provide the required power, the enumeration succeeds and, the power transistor ST890 (U10) is switched ON, the entire board is powered, and the LD1 LED remains turned OFF. Thus, the 32F413HDISCOVERY board consumes up to 500 mA current, but no more. If the host cannot provide the requested current, the enumeration fails. Therefore, the ST890 remains OFF and the MCU part including the extension board is not powered. As a


consequence the red LED (LD1) is turned ON. In this case, it is mandatory to use an external power supply.

Figure 7. JP3: 5V_ST_LINK selection

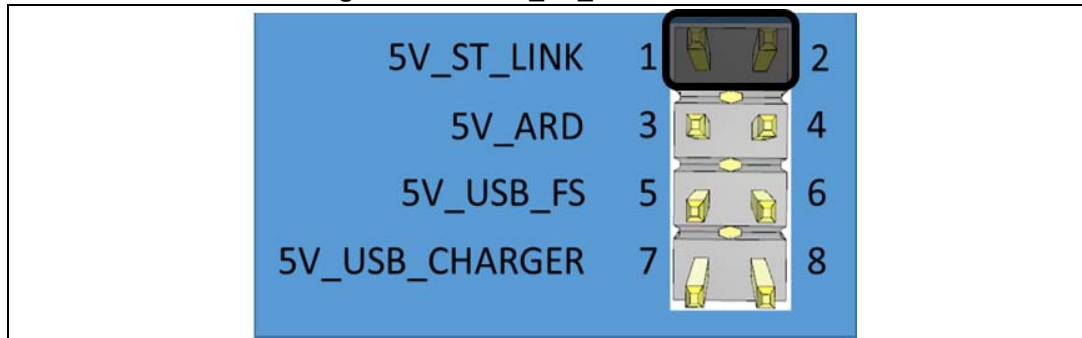


- 5V_ARD:** 7-12 V DC power from ARDUINO® Uno V3 connector. The power source is CN7 pin 8 named V_{IN} on the ARDUINO® connector silkscreen. A jumper must be placed on pins 3 and 4 of JP3 (5V_ARD on the silkscreen) to enable this power source (refer to [Figure 8](#)).

Figure 8. JP3: 5V_ARD selection from CN7 (VIN_5V_ARD)

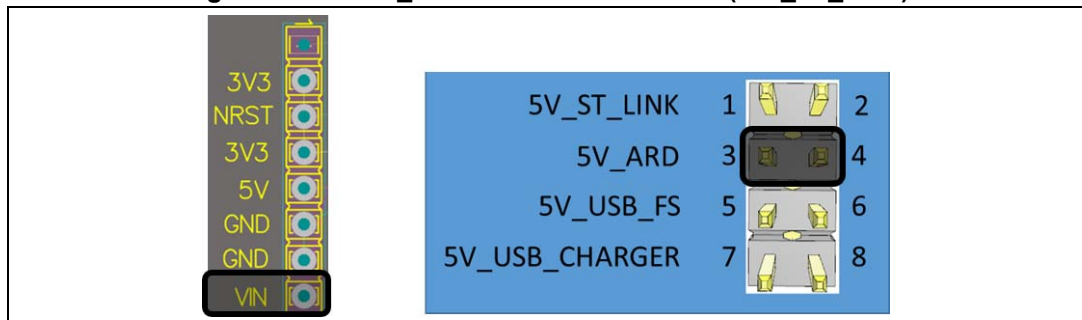


- 5V_USB_FS:** DC power from USB user connector. The power source is the USB Micro-AB connector (CN17). In this case, the 32F413HDISCOVERY board is powered by an external USB host without a current limitation on the board. A jumper must be placed on pins 5 and 6 of JP3 (5V_USB_FS on the silkscreen) to enable this power source (refer to [Figure 9](#)).

Figure 9. JP3: 5V_USB_FS

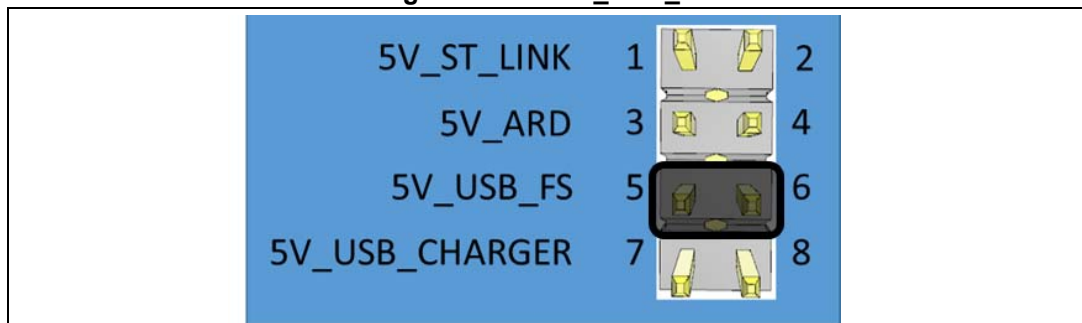

- 5V_USB_CHARGER:** DC power charger from USB ST-LINK. The power source is the USB Micro-B connector of the ST-LINK/V2-1 (CN2). In this case, if the 32F413HDISCOVERY Discovery kit is powered by an external USB charger the debug is unavailable. If the PC is connected instead of the charger, the limitation is no longer effective. In this case, the PC could be damaged. A jumper has to be placed on pins 7 and 8 of JP3 (5V_USB_CHARGER on the silkscreen) to enable this power source (refer to [Figure 10](#)).

Figure 10. JP3: 5V_USB_CHARGER selection

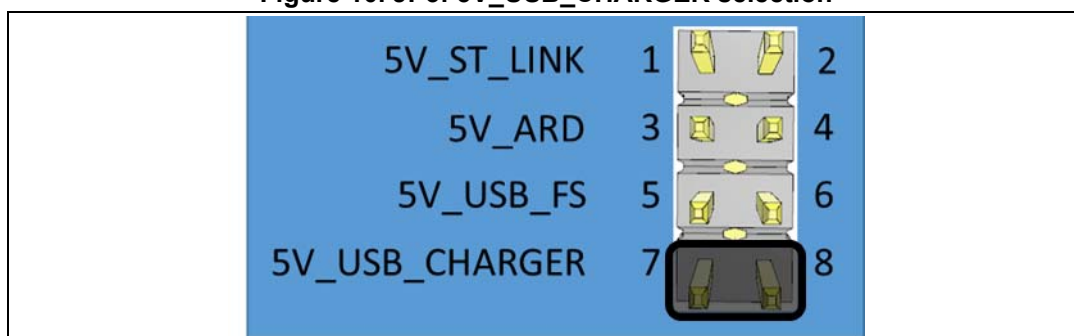

Note: In case the board is powered by a USB charger, there is no USB enumeration, so the led LD1 remains set to OFF permanently and the board is not powered. In this specific case only, the jumper JP3 must be placed on [7-8], to allow the board to be powered anyway.

Caution: Do not connect the PC to the ST-LINK (CN2) when R45 is soldered. The PC might be damaged or the board might not be powered correctly.

STM32F413ZH IDD current measurement: JP2

The STM32F413ZH current measurement can be done on JP2. By default, a jumper is placed on JP2.

For the current measurement configuration, the jumper on JP2 must be removed and an ammeter placed on JP2.

Note: The 32F413HDISCOVERY Discovery kit must be powered by a power supply unit or a piece of auxiliary equipment complying with the standard EN 62368-1:2014+A11:2017, and must be safety extralow voltage (SELV) with limited power capability.

6.3 Programming/debugging when the power supply is not from ST-LINK/V2-1

It is mandatory to power the 32F413HDISCOVERY Discovery kit first using CN7 (V_{IN}) or CN17 (USB_FS_OTG), then connecting the USB cable to the PC. Proceeding this way ensures the enumeration succeeds thanks to the external power source.

The following power sequence procedure must be respected:

1. Connect the jumper JP3 on (5V_ARD) or (5V_USB_FS)
2. Connect the external power source to CN7 in case of an ARDUINO® shield or CN17 in case of a USB FS host interface

3. Check that the GREEN LED LD6 is turned ON
4. Connect the PC to the USB connector (CN2)

If this order is not respected, the board might be powered by V_{BUS} first from ST-LINK, and the following risks might be encountered:

1. If the board needs a current higher than 500 mA, the PC might be damaged or can limit the current. As a consequence, the board is not powered correctly.
2. 500 mA is requested at the enumeration, so there is a risk that the request is rejected and enumeration does not succeed if the PC cannot provide such a current.

6.4 Clock sources

Three clock sources are described below:

- 8 MHz MCO clock from ST-LINK MCU for the STM32F413ZHT6
- 8 MHz X2 oscillator for the STM32F413ZHT6
- 32.768 kHz X1 crystal for the STM32F413ZHT6 embedded RTC

6.5 Reset sources

The reset signal of the 32F413HDISCOVERY Discovery kit is active at a low level and the reset sources include:

- Reset button B2
- ARDUINO® Uno V3 shield board from CN7
- Embedded ST-LINK/V2-1

6.6 Audio

An audio codec with four DACs and two ADCs is connected to the I²S interface of the STM32F413ZH. It communicates with the STM32 via the I²C bus shared with the touch panel of the LCD.

- The analog-line output is connected to the DAC of the audio codec via the audio jack (CN5).
- The microphone input is connected from the audio jack to the input line of the audio codec.
- Two optional external speakers can be connected to the audio codec through CN3 for the left speaker and CN4 for the right speaker.
- Two digital ST-MEMS microphones are on the 32F413HDISCOVERY Discovery kit. They are connected to the digital input microphones of the STM32F413ZH and are managed by the DFSDM functionality.
- The CN12 connector offers the possibility to connect a microphone module with up to five ST-MEMS microphones (refer to the audio schematics of the board). They are connected to the digital input microphones of the STM32F413ZH and are managed by the DFSDM functionality.

6.7 USB OTG FS

The 32F413HDISCOVERY Discovery kit supports the USB OTG FS communication via a USB Micro-AB connector.

A USB power switch (U15) is also connected to V_{BUS} and provides power to CN17. The green LED LD7 is lit when either:

- The power switch is ON and the 32F413HDISCOVERY works as a USB host
- V_{BUS} is powered by another USB host when the 32F413HDISCOVERY works as a USB device.

The red LED LD8 is lit when an overcurrent occurs.

Note:1 When the 32F413HDISCOVERY board is powered by the ST-LINK, the OTG function provides up to 100 mA.

Note:2 When the 32F413HDISCOVERY board is powered by an external power supply, the OTG function can provide more than 100 mA, according to the external power supply capability.

Note:3 When the 32F413HDISCOVERY board is powered by an external power supply through the USB FS connector (CN17), in device mode, do not use a PC as the power source.

6.8 microSD™ card

The 32F413HDISCOVERY Discovery kit supports the microSD™ card connected to the SDIO port of the STM32F413ZH.

The microSD™ card has to be compatible with the MMC 4.1 specification, or with the microSD™ card memory specification version 2.0

6.9 PSRAM memory

The 8-Mbit PSRAM is connected to the FSMC interface of the STM32F413ZH. This memory is organized as 16-bit 512 Kwords.

6.10 Quad-SPI NOR flash memory

The 128-Mbit Quad-SPI NOR flash memory is connected to the Quad-SPI interface of the STM32F413ZH.

6.11 Virtual COM port

The serial interface USART6 is directly available as a Virtual COM port of the PC connected to the ST-LINK/V2-1 USB connector (CN13). The Virtual COM port settings are configured as:

- 115200 b/s
- 8-bit data
- No parity
- 1 stop bit
- No flow control

6.12 LCD

The 240x240-pixel TFT LCD is connected to the FSMC data interface of the STM32F413ZH.

It uses a controller for 262K-color and TFT-LCD graphic type. Display data are stored in the on-chip display data RAM of 240x320x18 bits. It performs display data RAM read/write operation with no external operation clock, to minimize power consumption.

An external SRAM is also used to store display data.

The LCD_RS signal determines whether the bus carries data or control/command registers.

6.13 Capacitive control touch panel

The capacitive control touch panel is controlled by the STM32F413ZH through the I2CFMP shared with the audio codec.

6.14 Wi-Fi® 802.11 b/g/n module


A Wi-Fi module is integrated with the 32F413HDISCOVERY Discovery kit (refer to [Figure 11](#)).

The Wi-Fi® module is an embedded (eS-WiFi) wireless internet connectivity device. The Wi-Fi hardware module consists of an ARM®-M3 Cortex® host processor, an integrated antenna, and a Broadcom Wi-Fi® device.

The module is driven by an SPI interface enabling the connection to the STM32F413ZH.

The Wi-Fi module requires no operating system and has a completely integrated TCP/IP stack that only requires AT commands to establish connectivity.

Figure 11. Wi-Fi® module

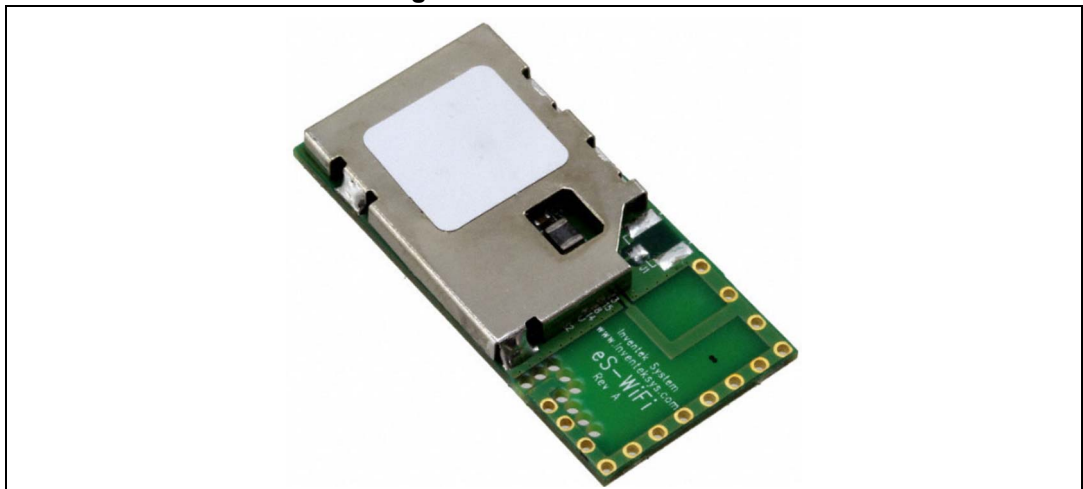

6.15 Buttons and LEDs

The black button B2 located on the LCD side is the reset of the microcontroller STM32F413ZH (Refer to [Figure 4: 32F413HDISCOVERY Discovery kit \(top side\)](#)).

When the button is depressed the logic state is LOW, otherwise, the logic state is HIGH.

The blue button B1, located on the LCD side, is used as a digital input or as an alternate wake-up function.

When the button is depressed the logic state is HIGH, otherwise, the logic state is LOW.

Two LEDs (LD4 red and LD3 green) located on the LCD side, are available for the user (refer to [Figure 5: 32F413HDISCOVERY Discovery kit \(bottom side\)](#)). To light a LED, a high logic state HIGH must be written in the corresponding GPIO register.

[Table 4](#) assigns the control ports to the LED indicators.

Table 4. Assignment of the control ports to the LED indicators

| LED | Color | Name | Comment |
|-----|-----------|------------------------|--------------------------------|
| B1 | BLUE | USER_B | Alternate function Wake-up PA0 |
| B2 | BLACK | RESET | NRST |
| LD1 | RED | Fault Power | Current upper than 750 mA |
| LD2 | RED/GREEN | ST-LINK COM | Green when communication |
| LD3 | GREEN | LED2_GREEN | PC5 |
| LD4 | RED | LED1_RED | PE3 |
| LD5 | GREEN | ARDUINO | PB12 |
| LD6 | GREEN | 5 V Power | 5 V available |
| LD7 | GREEN | V _{BUS} OK | 5 V USB available |
| LD8 | RED | V _{BUS} OCRCR | PG7 |

7 Connectors

7.1 ARDUINO® Uno V3 connectors

CN6, CN7, CN8, and CN9 are female connectors compatible with ARDUINO® Uno V3. Most shields designed for ARDUINO® Uno V3 are also supported by the 32F413HDISCOVERY Discovery kit.

Since the I/Os of the STM32F413ZH microcontroller are 5 V tolerant, there is no issue for ARDUINO® compatibility.

Example for the connector references (refer to [Figure 12](#)):

- CN6: Fisher BL 1-10 G
- CN7: Fisher BL 1-8 G
- CN8: Fisher BL 1-8 G
- CN9: Fisher BL 1-6 G

Figure 12. ARDUINO® connector (top view)

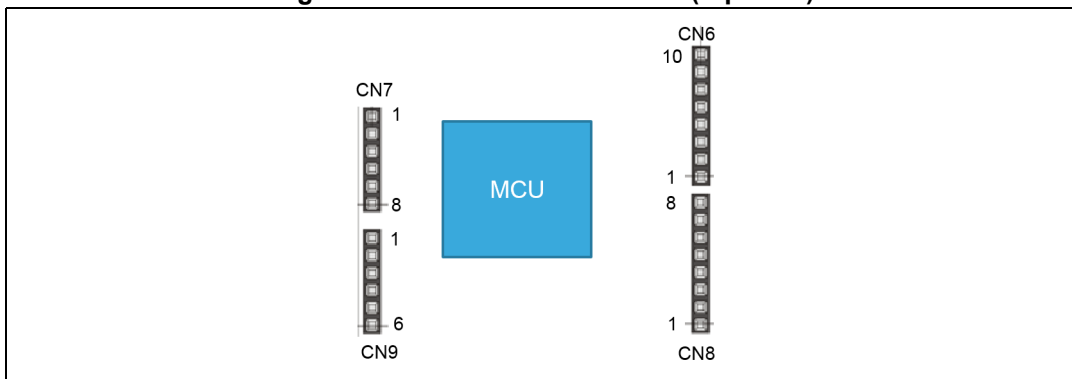


Table 5. Pinout of the ARDUINO® connector

| Connector | Pin number | Pin name | Signal name | STM32 pin | Function |
|-----------|------------|-----------------|-------------|-----------|--------------------|
| CN7 | 1 | NC | - | | - |
| | 2 | IOREF | - | | 3.3 V reference |
| | 3 | NRST | NRST | NRST | RESET |
| | 4 | 3.3 V | - | | 3.3 V input/output |
| | 5 | 5 V | - | | 5 V output |
| | 6 | GND | - | | GND |
| | 7 | GND | - | | GND |
| | 8 | V _{IN} | - | | Power input |

Table 5. Pinout of the ARDUINO® connector (continued)

| Connector | Pin number | Pin name | Signal name | STM32 pin | Function |
|-----------|------------|------------------|------------------|-----------|--------------------|
| CN9 | 1 | A0 | ADC | PC0 | ADC1_IN10 |
| | 2 | A1 | ADC | PA1 | ADC1_IN1 |
| | 3 | A2 | ADC | PA2 | ADC1_IN2 |
| | 4 | A3 | ADC | PA5 | ADC1_IN5 |
| | 5 | A4 | ADC | PB1 | ADC1_IN9 |
| | 6 | A5 | ADC | PC4 | ADC1_IN14 |
| CN6 | 10 | SCL/D15 | ARD_D15 | PB10 | I2C2_SCL |
| | 9 | SDA/D14 | ARD_D14 | PB11 | I2C2_SDA |
| | 8 | A _{VDD} | V _{REF} | - | V _{REF} |
| | 7 | GND | - | - | Ground |
| | 6 | SCK/D13 | ARD_D13 | PB12 | SPI3_SCK |
| | 5 | MISO/D12 | ARD_D12 | PB4 | SPI3_MISO |
| | 4 | PWM/MOSI/ D11 | ARD_D11 | PB5 | TIM3_CH2/SPI3_MOSI |
| | 3 | PWM/CS/D10 | ARD_D10 | PA15 | TIM2_CH1/SPI3_NSS |
| | 2 | PWM/D9 | ARD_D9 | PB8 | TIM4_CH3 |
| | 1 | D8 | ARD_D8 | PA4 | IO |
| CN8 | 8 | D7 | ARD_D7 | PC13 | IO |
| | 7 | PWM/D6 | ARD_D6 | PB0 | TIM3_CH3 |
| | 6 | PWM/D5 | ARD_D5 | PE6 | TIM9_CH2 |
| | 5 | D4 | ARD_D4 | PB6 | EXT_IT_6 |
| | 4 | PWM/D3 | ARD_D3 | PF10 | TIM5_CH4 |
| | 3 | D2 | ARD_D2 | PG13 | I/O |
| | 2 | TX/D1 | ARD_D1 | PF7 | UART7_TX |
| | 1 | RW/D0 | ARD_D0 | PF6 | UART7_RX |

7.2 USB OTG FS Micro-AB connector (CN17)

Figure 13 shows the front view of the connector.

Figure 13. USB OTG FS Micro-AB connector (front view)

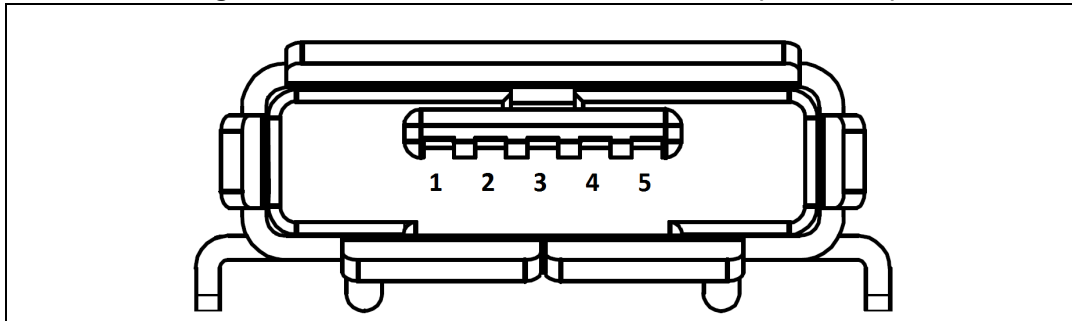


Table 6. USB OTG Micro-AB pinout (front view)

| Connector | Pin number | Pin names | Signal name | STM32 pin | Function |
|-----------|------------|------------------|-----------------|-----------|-------------------------|
| CN15 | 1 | V _{BUS} | USB_OTG_5V_VBUS | PA9 | 5V power and detection |
| | 2 | DM (D-) | USB_OTG_FS_N | PA11 | USB differential pair M |
| | 3 | DP (D+) | USB_OTG_FS_P | PA12 | USB differential pair P |
| | 4 | ID | USB_OTG_FS_ID | PA10 | USB Identification |
| | 5 | GND | - | - | GND |

Table 7. USB OTG FS power management

| Pin number | Pin names | Signal names | STM32 pin | Function |
|------------|--------------------|-------------------|-----------|------------------|
| U12-3 | FAULT _n | USB_OTG_FS_OVRCR | PG7 | Over Current IT |
| U12-4 | EN _n | USB_OTG_FS_PWR_EN | PG8 | USB Power enable |

7.3 LCD connector (CN16)

The LCD connector is shown in [Figure 14](#).

Figure 14. LCD connector

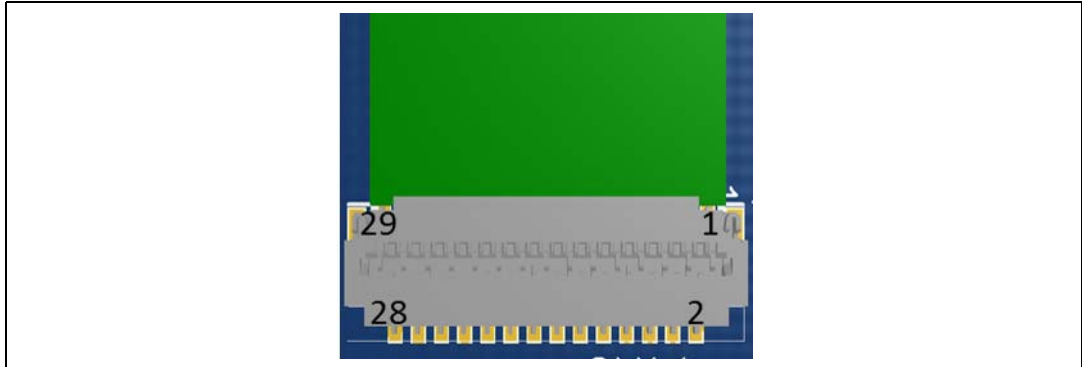


Table 8. Pinout of the LCD connector

| Connector | Pin number | Pin name | Signal name | STM32 pin | Function |
|-----------|------------|----------|---------------|-----------|----------------|
| CN16 | 1 | GND | - | - | Ground |
| | 2 | FMARK | LCD_TE | PB14 | Tearing Effect |
| | 3 | DB15 | LCD-PSRAM_D15 | PD10 | FSMC_D15 |
| | 4 | DB14 | LCD-PSRAM_D14 | PD9 | FSMC_D14 |
| | 5 | DB13 | LCD-PSRAM_D13 | PD8 | FSMC_D13 |
| | 6 | DB12 | LCD-PSRAM_D12 | PE15 | FSMC_D12 |
| | 7 | DB11 | LCD-PSRAM_D11 | PE14 | FSMC_D11 |
| | 8 | DB10 | LCD-PSRAM_D10 | PE13 | FSMC_D10 |
| | 9 | DB9 | LCD-PSRAM_D9 | PE12 | FSMC_D9 |
| | 10 | DB8 | LCD-PSRAM_D8 | PE11 | FSMC_D8 |
| | 11 | DB7 | LCD-PSRAM_D7 | PE13 | FSMC_D7 |
| | 12 | DB6 | LCD-PSRAM_D6 | PE9 | FSMC_D6 |
| | 13 | DB5 | LCD-PSRAM_D5 | PE8 | FSMC_D5 |
| | 14 | DB4 | LCD-PSRAM_D4 | PE7 | FSMC_D4 |
| | 15 | DB3 | LCD-PSRAM_D3 | PD1 | FSMC_D3 |
| | 16 | DB2 | LCD-PSRAM_D2 | PD0 | FSMC_D2 |
| | 17 | DB1 | LCD-PSRAM_D1 | PD15 | FSMC_D1 |
| | 18 | DB0 | LCD-PSRAM_D0 | PD14 | FSMC_D0 |
| | 19 | /RD | LCD-PSRAM_NOE | PD4 | FSMC_NOE |
| | 20 | /WR | LCD-PSRAM_NWE | PD5 | FSMC_NWE |
| | 21 | RS | LCD-RS_A0 | PF0 | FSMC_RS |

Table 8. Pinout of the LCD connector (continued)

| Connector | Pin number | Pin name | Signal name | STM32 pin | Function |
|-----------|------------|----------|-------------|-----------|----------------------|
| CN16 | 22 | /CS | LCD_NE3 | PG10 | FSMC_NE |
| | 23 | RESET | LCD-CTP_RST | PB13 | RESET |
| | 24 | IM | - | - | 8/16 bit mode select |
| | 25 | IOVCC | 3.3 V | - | Power |
| | 26 | VCI | 3.3 V | - | Power |
| | 27 | GND | GND | - | Ground |
| | 28 | LEDA | LEDA | - | LED anode |
| | 29 | LEDK | LEDK | - | LED cathode |

Table 9 shows the LCD connection for backlight management:

Table 9. Backlight power management

| Pin number | Pin name | Signal name | STM32 pin | Function |
|------------|----------|-------------|-----------|------------------|
| U18-7 | EN | LCD_BL_CTRL | PE5 | Backlight enable |

7.4 Touch-panel connector (CN10)

The touch-panel connector is shown in Figure 15.

Figure 15. Touch panel connector pinout

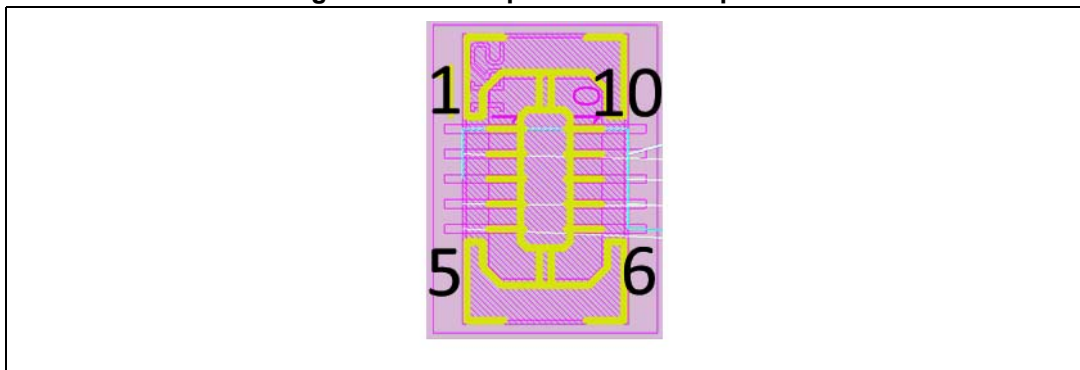


Table 10. Pinout of the touch panel

| Connector | Pin number | Pin name | Signal name | STM32 pin | Function |
|-----------|------------|----------|-------------|-----------|----------------------------------|
| CN10 | 1 | GND | - | - | Ground |
| | 2 | INT | CTP_INT | PC1 | Interrupt |
| | 3 | GND | - | - | Ground |
| | 4 | SDA | I2CFMP1_SDA | PC7 | I2CFMP1_SDA |
| | 5 | SCL | I2CFMP1_SCL | PC6 | I2CFMP1_SDA |
| | 6 | GND | - | - | Ground |
| | 7 | RESET | LCD-CTP_RST | PB13 | RESET |
| | 8 | GND | - | - | Ground/ V _{CC} for rev2 |
| | 9 | VDD | 3.3 V | - | Power |
| | 10 | GND | - | - | Ground |

7.5 microSD™ connector (CN1)

The microSD™ connector is shown in [Figure 16](#).

Figure 16. microSD™ connector (front view)

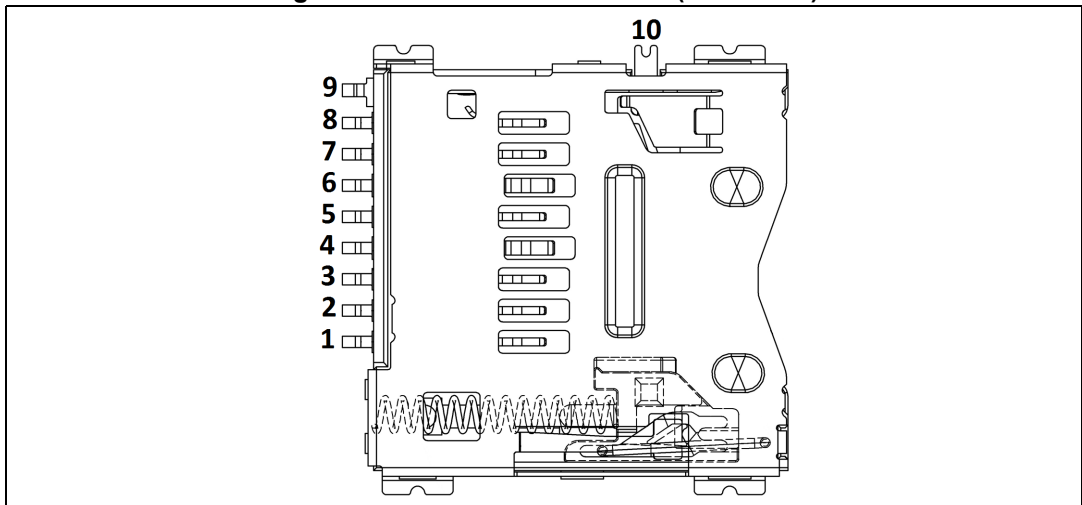


Table 11. Pinout of the microSD™ connector

| Connector | Pin number | Pin name | Signal name | STM32 pin | Function |
|-----------|------------|-----------|-------------|-----------|----------------|
| CN1 | 1 | SDIO_D2 | SD_D2 | PC10 | SD DATA 2 |
| | 2 | SDIO_D3 | SD_D3 | PC11 | SD DATA 3 |
| | 3 | SDIO_CMD | SD_CMD | PA6 | SD CMD |
| | 4 | 3.3 V | | - | POWER |
| | 5 | SD_CLK | SD_CLK | PC12 | SD CLOCK |
| | 6 | GND | | - | GND |
| | 7 | SDIO_D0 | SD_D0 | PC8 | SD DATA 0 |
| | 8 | SDIO_D1 | SD_D1 | PC9 | SD DATA 1 |
| | 9 | SW2 / GND | | - | GND |
| | 10 | SW1 | SD_Detect | PF11 | SD CARD DETECT |

7.6 ST-LINK/V2-1 USB Micro-AB connector (CN2)

The USB connector is used to connect the embedded ST-LINK/V2-1 to a PC for programming and debugging of the STM32F413ZH microcontroller.

The USB connector is shown in [Figure 17](#).

Figure 17. USB Micro-AB connector (front view)

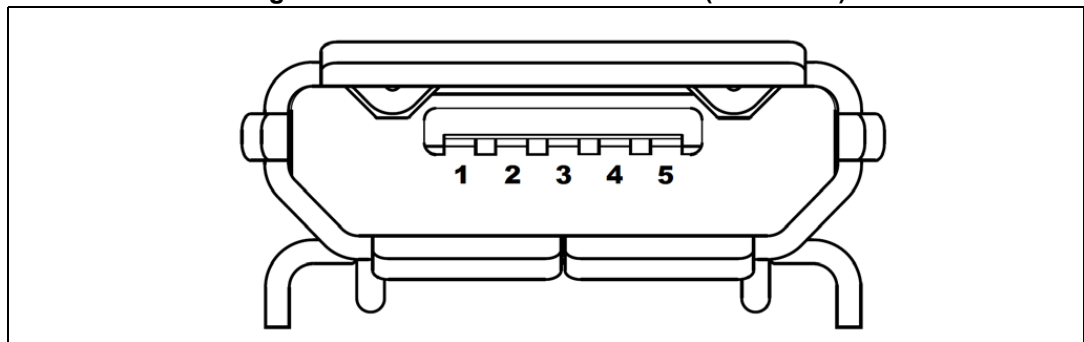


Table 12. USB Micro-AB connector

| Connector | Pin number | Pin name | Signal name | STM32F103 pin | Function |
|-----------|------------|------------------|----------------|---------------|-------------------------|
| CN2 | 1 | V _{BUS} | 5V_USB_ST_LINK | - | 5 V power and detection |
| | 2 | DM (D-) | USB_STLK_N | PA11 | USB differential pair M |
| | 3 | DP (D+) | USB_STLK_P | PA12 | USB differential pair P |
| | 4 | ID | USB_STLK_ID | - | USB Identification |
| | 5 | GND | - | - | GND |

7.7 TAG connector (CN11)

The TAG connector is implemented on the 32F413HDISCOVERY Discovery kit. The TAG connector is a 10-pin footprint supported by the SWD mode. It shares the signals with the ST-LINK (refer to [Figure 18](#)).

The TC2050-IDC-NL cable is used to link ST-LINK and the TAG connector on the 32F413HDISCOVERY so that users can easily program and debug the STM32F413ZH (refer to [Figure 19](#)).

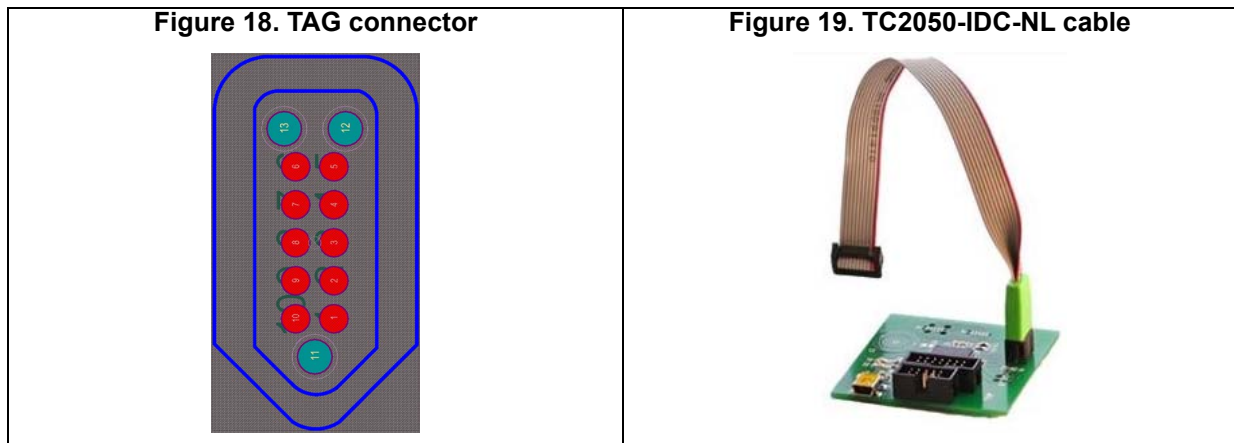


Table 13. Pinout of the TAG connector

| Connector | Pin number | Pin name | Signal name | STM32 pin | Function |
|-----------|------------|----------|-------------------|-----------|----------|
| CN11 | 1 | 3.3 V | 3V3_ST_LINK | - | Power |
| | 2 | SWD | STLINK_JTMS_SWDIO | PA13 | SW DATA |
| | 3 | GND | - | - | Ground |
| | 4 | SWCLK | STLINK_JTCK_SWCLK | PA14 | SW CLOCK |
| | 5 | GND | - | - | Ground |
| | 6 | SWO | STLINK_JTDO_SWO | PB3 | SWO |
| CN11 | 7 | NC | - | - | - |
| | 8 | NC | - | - | - |
| | 9 | NC | - | - | - |
| | 10 | NRST | NRST | NRST | RESET |

7.8 Audio line output (green jack) connector (CN5)

A 3.5 mm stereo audio green jack output is available to support the headphones.

The audio jack connector is shown in [Figure 20](#).

Figure 20. Audio jack connector (front view)

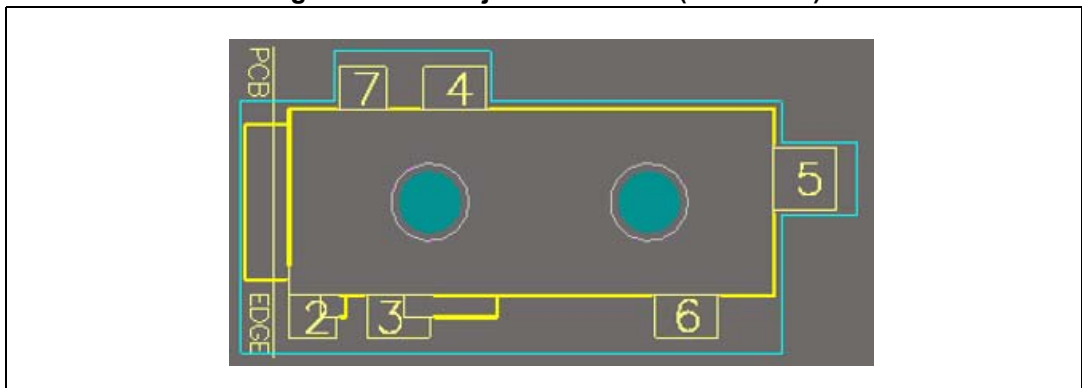


Table 14. Audio jack connector

| Connector | Pin number | Pin name | Signal name | Audio codec pin | Function |
|-----------|------------|----------|-------------|-----------------|------------|
| CN5 | 1 | 1 | NA | NA | NA |
| | 2 | 2 | MIC_IN | MICBIAS1 | Microphone |
| | 3 | 3 | GND | HPOUT1FB/GND | GND |
| | 4 | 4 | HP_OUT_R | HPOUT1R | HP right |
| | 5 | 5 | NA | NA | NA |
| | 6 | 6 | HP_OUT_L | HPOUT1L | HP left |

7.9 Extension microphone connector (CN12)

The extension microphone connector is shown in [Figure 21](#).

Figure 21. Extension microphone connector (front view)

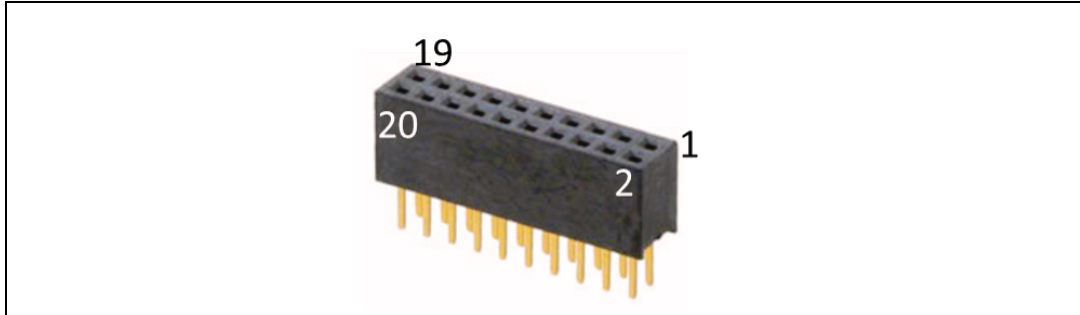


Table 15. Extension microphone connector

| Connector | Pin number | Pin name | Signal name | STM32 pin | Function |
|-----------|------------|-------------------|-------------------|-----------|--------------|
| CN12 | 1 | GND | GND | - | Power |
| | 2 | V _{CC_0} | 3.3 V | - | Ground |
| | 3 | CLK_1 | EXT_DFSDM2_CKOUT | PD2 | DFSDM2 CLOCK |
| | 4 | CLK_0 | EXT_DFSDM1_CKOUT | PA8 | DFSDM1 CLOCK |
| | 5 | DATA_1 | EXT_DFSDM2_DATIN1 | PA7 | DFSDM2 DATA1 |
| | 6 | DATA_0 | EXT_DFSDM1_DATIN1 | PD6 | DFSDM1 DATA1 |
| | 7 | DATA_3 | EXT_DFSDM2_DATIN7 | PB7 | DFSDM2 DATA7 |
| | 8 | - | - | - | - |
| | 9 | - | - | - | - |
| | 10 | DETECTN | DETECTN | - | - |
| | 11 | - | - | - | - |
| | 12 | MEMS_LED | MEMS_LED | PE4 | - |
| CN12 | 13 | - | - | - | - |
| | 14 | - | - | - | - |
| | 15 | - | - | - | - |
| | 16 | - | - | - | - |
| | 17 | - | - | - | - |
| | 18 | - | - | - | - |
| | 19 | V _{CC_1} | 3.3 V | - | Power |
| | 20 | GND | GND | - | Ground |

7.10 Optional audio stereo speakers (CN3 and CN4)

The stereo audio outputs are available to support stereo speakers (CN3 for the left channel and CN4 for the right channel).

8 32F413HDISCOVERY I/O assignment

Table 16. 32F413HDISCOVERY I/O assignment

| Pin No. | Pin Name | Signal or Label | Feature / Comment |
|---------|--------------------|--------------------|------------------------------|
| 1 | PE2 | QSPI_BK1_IO2 | QSPI |
| 2 | PE3 | LED1_RED | User LED |
| 3 | PE4 | MEMS_LED | Microphones MEMS Module |
| 4 | PE5 | LCD_BL_CTRL | LCD and CTP |
| 5 | PE6 | ARD_D5 | ARD_TIM9_CH2 |
| 6 | V _{BAT} | V _{BAT} | 3.3V |
| 7 | PC13-ANTI_TAMP | ARD_D7 | ARD_IO |
| 8 | PC14-OSC32_IN | OSC_32K_IN | RTC CLK |
| 9 | PC15-OSC32_OUT | OSC_32K_OUT | RTC CLK |
| 10 | PF0 | PSRAM_A0/LCD-RS_A0 | Shared between LCD and PSRAM |
| 11 | PF1 | PSRAM_A1 | PSRAM |
| 12 | PF2 | PSRAM_A2 | PSRAM |
| 13 | PF3 | PSRAM_A3 | PSRAM |
| 14 | PF4 | PSRAM_A4 | PSRAM |
| 15 | PF5 | PSRAM_A5 | PSRAM |
| 16 | V _{SS_5} | V _{SS_5} | GND |
| 17 | V _{DD_5} | V _{DD_5} | 3.3 V |
| 18 | PF6 | ARD_D0_URX | ARD_UART7 |
| 19 | PF7 | ARD_D1_UTX | ARD_UART7 |
| 20 | PF8 | QSPI_BK1_IO0 | QSPI |
| 21 | PF9 | QSPI_BK1_IO1 | QSPI |
| 22 | PF10 | ARD_D3_PWM | ARD_TIM5_CH4 |
| 23 | PH0-OSC_IN | HSE_OSC_IN | 8 MHz clock |
| 24 | PH1-OSC_OUT | WIFI_RST | Wi-Fi |
| 25 | NRST | NRST_BUTTON | RESET |
| 26 | PC0 | ARD_A0 | ARD_ADC1_IN10 |
| 27 | PC1 | CTP_INT | Touch Panel INT |
| 28 | PC2 | CODEC_I2Sext_SD | I2S2 |
| 29 | PC3 | CODEC_I2S_SD | I2S2 |
| 30 | V _{DD_12} | V _{DD_12} | 3.3 V |
| 31 | V _{SSA} | V _{SSA} | GND |
| 32 | V _{REF+} | V _{REF} | 3.3 V |

Table 16. 32F413HDISCOVERY I/O assignment (continued)

| Pin No. | Pin Name | Signal or Label | Feature / Comment |
|---------|-------------------|-------------------|---------------------|
| 33 | V _{DDA} | V _{DDA} | 3.3 V |
| 34 | PA0-WKUP | B_USER | USER BUTTON |
| 35 | PA1 | ARD_A1 | ARD_ADC1_IN1 |
| 36 | PA2 | ARD_A2 | ARD_ADC1_IN2 |
| 37 | PA3 | CODEC_I2S_MCLK | AUDIO_I2S2 |
| 38 | V _{SS_4} | V _{SS_4} | GND |
| 39 | V _{DD_4} | V _{DD_4} | 3.3 V |
| 40 | PA4 | ARD_D8_IO | ARD |
| 41 | PA5 | ARD_A3 | ARD_ADC1_IN5 |
| 42 | PA6 | SD_CMD | SD CARD |
| 43 | PA7 | DFSDM2_DATIN1 | ST-MEMS microphones |
| 44 | PC4 | ARD_A5 | ARD_ADC1_IN14 |
| 45 | PC5 | LED2_GREEN | User LED |
| 46 | PB0 | ARD_D6_PWM | ARD_TIM3_CH3 |
| 47 | PB1 | ARD_A4 | ARD_ADC1_IN9 |
| 48 | PB2 | QSPI_CLK | QSPI |
| 49 | PF11 | SD_Detect | SD CARD_IT_11 |
| 50 | PF12 | PSRAM_A6 | PSRAM |
| 51 | V _{SS_6} | V _{SS_6} | GND |
| 52 | V _{DD_6} | V _{DD_6} | 3.3 V |
| 53 | PF13 | PSRAM_A7 | PSRAM |
| 54 | PF14 | PSRAM_A8 | PSRAM |
| 55 | PF15 | PSRAM_A9 | PSRAM |
| 56 | PG0 | PSRAM_A10 | PSRAM |
| 57 | PG1 | PSRAM_A11 | PSRAM |
| 58 | PE7 | LCD-PSRAM_D4 | LCD-PSRAM |
| 59 | PE8 | LCD-PSRAM_D5 | LCD-PSRAM |
| 60 | PE9 | LCD-PSRAM_D6 | LCD-PSRAM |
| 61 | V _{SS_7} | V _{SS_7} | GND |
| 62 | V _{DD_7} | V _{DD_7} | 3.3 V |
| 63 | PE10 | LCD-PSRAM_D7 | LCD-PSRAM |
| 64 | PE11 | LCD-PSRAM_D8 | LCD-PSRAM |
| 65 | PE12 | LCD-PSRAM_D9 | LCD-PSRAM |
| 66 | PE13 | LCD-PSRAM_D10 | LCD-PSRAM |
| 67 | PE14 | LCD-PSRAM_D11 | LCD-PSRAM |

Table 16. 32F413HDISCOVERY I/O assignment (continued)

| Pin No. | Pin Name | Signal or Label | Feature / Comment |
|---------|-------------------------|-------------------------|---------------------|
| 68 | PE15 | LCD-PSRAM_D12 | LCD-PSRAM |
| 69 | PB10 | ARD_D15_SCL | ARD_I2C2 |
| 70 | PB11 | ARD_D14_SDA | ARD_I2C2 |
| 71 | V _{CAP1_0} | V _{CAP1_0} | PWR |
| 72 | V _{DD_1_0} | V _{DD_1_0} | 3.3 V |
| 73 | PB12 | ARD_D13_SCK | SPI3 (ARD & WIFI) |
| 74 | PB13 | LCD-CTP_RST | LCD-CTP |
| 75 | PB14 | LCD_TE | LCD |
| 76 | PB15 | WIFI_WKUP | Wi-Fi |
| 77 | PD8 | LCD-PSRAM_D13 | LCD-PSRAM |
| 78 | PD9 | LCD-PSRAM_D14 | LCD-PSRAM |
| 79 | PD10 | LCD-PSRAM_D15 | LCD-PSRAM |
| 80 | PD11 | PSRAM_A16 | PSRAM |
| 81 | PD12 | PSRAM_A17 | PSRAM |
| 82 | PD13 | QSPI_BK1_IO3 | QSPI |
| 83 | V _{SS_8} | V _{SS_8} | GND |
| 84 | V _{DD_8} | V _{DD_8} | 3.3 V |
| 85 | PD14 | LCD-PSRAM_D0 | LCD-PSRAM |
| 86 | PD15 | LCD-PSRAM_D1 | LCD-PSRAM |
| 87 | PG2 | PSRAM_A12 | PSRAM |
| 88 | PG3 | PSRAM_A13 | PSRAM |
| 89 | PG4 | PSRAM_A14 | PSRAM |
| 90 | PG5 | PSRAM_A15 | PSRAM |
| 91 | PG6 | QSPI_BK1_NCS | QSPI |
| 92 | PG7 | USB_OTG_FS_OVRCR | USB_INT_7 |
| 93 | PG8 | USB_OTG_FS_PWR_EN | USB |
| 94 | V _{SS_9} | V _{SS_9} | GND |
| 95 | V _{DD_2_USB33} | V _{DD_2_USB33} | 3.3 V |
| 96 | PC6 | CTP_I2C_SCL | CTP_I2CFMP1 |
| 97 | PC7 | CTP_I2C_SDA | CTP_I2CFMP1 |
| 98 | PC8 | SD_D0 | SD CARD |
| 99 | PC9 | SD_D1 | SD CARD |
| 100 | PA8 | DFSDM1_CKOUT | ST-MEMS microphones |
| 101 | PA9 | USB_OTG_FS_VBUS | USB |
| 102 | PA10 | USB_OTG_FS_ID | USB |

Table 16. 32F413HDISCOVERY I/O assignment (continued)

| Pin No. | Pin Name | Signal or Label | Feature / Comment |
|---------|---------------------|---------------------|---------------------|
| 103 | PA11 | USB_OTG_FS_DM | USB |
| 104 | PA12 | USB_OTG_FS_DP | USB |
| 105 | PA13 | DBG_SWDIO | STLINK |
| 106 | V _{CAP2_0} | V _{CAP2_0} | PWR |
| 107 | V _{SS_2_0} | V _{SS_2_0} | GND |
| 108 | V _{DD_2_0} | V _{DD_2_0} | 3.3 V |
| 109 | PA14 | DBG_SWCLK | ST-LINK |
| 110 | PA15 | ARD_D10_PWM_CS | ARD_TIM2_CH1_SPI3 |
| 111 | PC10 | SD_D2 | SD CARD |
| 112 | PC11 | SD_D3 | SD CARD |
| 113 | PC12 | SD_CLK | SD CARD |
| 114 | PD0 | LCD-PSRAM_D2 | LCD-PSRAM |
| 115 | PD1 | LCD-PSRAM_D3 | LCD-PSRAM |
| 116 | PD2 | DFSDM2_CKOUT | Microphones MEMS |
| 117 | PD3 | CODEC_I2S_CK | AUDIO_I2S2 |
| 118 | PD4 | LCD-PSRAM_NOE | LCD-PSRAM |
| 119 | PD5 | LCD-PSRAM_NWE | LCD-PSRAM |
| 120 | V _{SS_10} | V _{SS_10} | GND |
| 121 | V _{DD_10} | V _{DD_10} | 3.3 V |
| 122 | PD6 | DFSDM1_DATIN1 | ST-MEMS microphones |
| 123 | PD7 | PSRAM_NE1 | PSRAM |
| 124 | PG9 | UART_VCP_RX | STLINK_UART6 |
| 125 | PG10 | LCD_NE3 | LCD |
| 126 | PG11 | WIFI_SPI_CSN | WIFI_SPI_CS |
| 127 | PG12 | WIFI_DRDY | Wi-Fi |
| 128 | PG13 | ARD_D2_IO | ARD |
| 129 | PG14 | UART_VCP_TX | STLINK_UART6 |
| 130 | V _{SS_11} | V _{SS_11} | GND |
| 131 | V _{DD_11} | V _{DD_11} | 3.3 V |
| 132 | PG15 | CODEC_INT | AUDIO_INT15 |
| 133 | PB3 | DBG_SWO | ST-LINK |
| 134 | PB4 | ARD_D12_MISO | SPI3 (ARD & WIFI) |
| 135 | PB5 | ARD_D11_PWM_MOSI | SPI3 (ARD & WIFI) |
| 136 | PB6 | ARD_D4_INT | ARD_INT_6 |
| 137 | PB7 | DFSDM2_DATIN7 | ST-MEMS microphones |

Table 16. 32F413HDISCOVERY I/O assignment (continued)

| Pin No. | Pin Name | Signal or Label | Feature / Comment |
|---------|-------------------|-------------------|-------------------|
| 138 | BOOT0 | BOOT0 | BOOT |
| 139 | PB8 | ARD_D9_PWM | ARD_TIM4_CH3 |
| 140 | PB9 | CODEC_I2S_WS | AUDIO_I2S2 |
| 141 | PE0 | PSRAM_NBL0 | PSRAM |
| 142 | PE1 | PSRAM_NBL1 | PSRAM |
| 143 | PDR_ON | PDR_ON | PDR |
| 144 | V _{DD_3} | V _{DD_3} | 3.3 V |


9 32F413HDISCOVERY board information

9.1 Product marking

The product and each board composing the product are identified with one or several stickers. The stickers, located on the top or bottom side of each PCB, provide product information:

- Main board featuring the target device: product order code, product identification, serial number, and board reference with revision.

Single-sticker example:

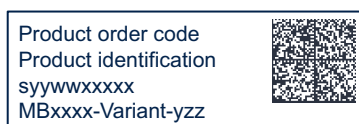

Dual-sticker example:



- Other boards if any: board reference with revision and serial number.

Examples:



On the main board sticker, the first line provides the product order code, and the second line the product identification.

On all board stickers, the line formatted as “*MBxxxx-Variant-yzz*” shows the board reference “*MBxxxx*”, the mounting variant “*Variant*” when several exist (optional), the PCB revision “*y*”, and the assembly revision “*zz*”, for example B01. The other line shows the board serial number used for traceability.

Products and parts labeled as “*ES*” or “*E*” are not yet qualified or feature devices that are not yet qualified. STMicroelectronics disclaims any responsibility for consequences arising from their use. Under no circumstances will STMicroelectronics be liable for the customer’s use of these engineering samples. Before deciding to use these engineering samples for qualification activities, contact STMicroelectronics’ quality department.

“*ES*” or “*E*” marking examples of location:

- On the targeted STM32 that is soldered on the board (for an illustration of STM32 marking, refer to the STM32 datasheet *Package information* paragraph at the www.st.com website).
- Next to the evaluation tool ordering part number that is stuck or silk-screen printed on the board.

Some boards feature a specific STM32 device version, which allows the operation of any bundled commercial stack/library available. This STM32 device shows a “*U*” marking option at the end of the standard part number and is not available for sales.

To use the same commercial stack in their applications, the developers might need to purchase a part number specific to this stack/library. The price of those part numbers includes the stack/library royalties.

9.2 32F413HDISCOVERY product history

Table 17. Product history

| Order code | Product identification | Product details | Product change description | Product limitations |
|------------------|---|---|---|-------------------------------------|
| STM32F413H-DISCO | 32F413HDISCO/ | MCU: – STM32H745ZIT6 silicon revision 'A' or '1' | Initial revision | No limitation |
| | | MCU errata sheet: – <i>STM32F413xG/xH and STM32F423xH device errata (ES0372)</i> | | |
| | | Boards: – MB1274-F413ZHT6-E01 (main board) – MB1299-Default-B02 (MEMS microphone daughterboard) | | |
| | DK32F413H\$AU1 | MCU: – STM32H745ZIT6 silicon revision 'A' or '1' | – Main board revision changed – MEMS microphone daughterboard revision changed | No demonstration binary is flashed. |
| | | MCU errata sheet: – <i>STM32F413xG/xH and STM32F423xH device errata (ES0372)</i> | | |
| | | Boards: – MB1274-F413ZHT6-E03 (main board) – MB1299-Default-B03 (MEMS microphone daughterboard) | | |
| DK32F413H\$AU2 | MCU: – STM32H745ZIT6 silicon revision 'A' or '1' | Packaging: plastic blister replaced by a carton box | No demonstration binary is flashed. | |
| | MCU errata sheet: – <i>STM32F413xG/xH and STM32F423xH device errata (ES0372)</i> | | | |
| | Boards: – MB1274-F413ZHT6-E03 (main board) – MB1299-Default-B03 (MEMS microphone daughterboard) | | | |

9.3 Board revision history

Table 18. Board revision history

| Board reference | Board variant and revision | Board change description | Board limitations |
|---|----------------------------|---|-------------------|
| MB1274 (main board) | F413ZHT6-D01 | Initial revision | No limitation |
| | F413ZHT6-E01 | <ul style="list-style-type: none"> – R70 value reduced from 100 kΩ to 10 kΩ – CN10 moved down to 2 mm for LCD assembly – U21 footprint updated – CN1 microSD™ connector footprint updated to support new reference with positioning holes | No limitation |
| | F413ZHT6-E03 | <ul style="list-style-type: none"> – ZZ1 (touch panel) replaced with FRIDA FRD154B2902-D-CTQ with impact on firmware – Several part references updated due to obsolescence, such as MEMS microphones or others. Refer to the bill of materials for details. | No limitation |
| MB1299 (MEMS microphone daughterboard) | Default-B01 | Initial revision | No limitation |
| | Default-B02 | CN1 connector updated to support ribbon cable | No limitation |
| | Default-B03 | Several part references updated due to obsolescence, such as MEMS microphones or others. Refer to the bill of materials for details. | No limitation |

10 Federal Communications Commission (FCC) and ISED Canada Compliance Statements

10.1 FCC Compliance Statement

Contains FCC ID: O7P-362

Part 15.19

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Part 15.21

Any changes or modifications to this equipment not expressly approved by STMicroelectronics may cause harmful interference and void the user's authority to operate this equipment.

Part 15.105

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Responsible Party - U.S. Contact Information:

Francesco Doddo
STMicroelectronics, Inc.
200 Summit Drive | Suite 405 | Burlington, MA 01803
USA
Telephone: +1 781-472-9634

10.2 ISED Compliance Statement

Contains/Contient IC: 10147A-362

This device complies with the ISED Canada RF radiation exposure limits set forth for general population for mobile application (uncontrolled exposure). This device must not be collocated or operating in conjunction with any other antenna or transmitter.

Compliance Statement

Notice: This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

ISED Canada ICES-003 Compliance Label: CAN ICES-3 (A) / NMB-3 (A).

Déclaration de conformité

Avis: Le présent appareil est conforme aux CNR d'ISDE Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement

Étiquette de conformité à la NMB-003 d'ISDE Canada: CAN ICES-3 (A) / NMB-3 (A).

11 UKCA Compliance Statement

SIMPLIFIED UK DECLARATION OF CONFORMITY

Hereby, the manufacturer STMicroelectronics, declares that the radio equipment type "32F413HDISCOVERY" is in compliance with the UK Radio Equipment Regulations 2017 (UK S.I. 2017 No. 1206). The full text of the UK Declaration of Conformity is available at the following internet address: www.st.com.

12 RED Compliance Statement

Simplified EU declaration of conformity

Hereby, STMicroelectronics declares that the radio equipment type "32F413HDISCOVERY" is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:

www.st.com.

Déclaration de conformité UE simplifiée

STMicroelectronics déclare que l'équipement radioélectrique du type "32F413HDISCOVERY" est conforme à la directive 2014/53/UE.


Le texte complet de la déclaration de conformité UE est disponible à l'adresse internet suivante:

www.st.com.

13 Product disposal

Disposal of this product: WEEE (Waste Electrical and Electronic Equipment)

(Applicable in Europe)



This symbol on the product, accessories, or accompanying documents indicates that the product and its electronic accessories should not be disposed of with household waste at the end of their working life.

To prevent possible harm to the environment and human health from uncontrolled waste disposal, please separate these items from other type of waste and recycle them responsibly to the designated collection point to promote the sustainable reuse of material resources.

Household users:

You should contact either the retailer where you buy the product or your local authority for further details of your nearest designated collection point.

Business users:

You should contact your dealer or supplier for further information.

Revision history

Table 19. Document revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 05-Apr-2017 | 1 | Initial release. |
| 15-Dec-2021 | 2 | Reshuffle of the document to align with the latest standards: <ul style="list-style-type: none"> – <i>Introduction</i> to <i>Conventions</i> reordering – New <i>Table 2: Codification explanation</i> and <i>Section 7: 32F413HDISCOVERY board information</i> Updated: <ul style="list-style-type: none"> – <i>Introduction, Features, Figure 3, Figure 4, and Figure 5</i> Removed: <ul style="list-style-type: none"> – <i>Demonstration software</i> and <i>Electrical schematics</i> removed. |
| 19-Mar-2025 | 3 | Updated: <ul style="list-style-type: none"> – <i>Product marking, Federal Communications Commission (FCC) and ISED Canada Compliance Statements, and RED Compliance Statement</i> Added: <ul style="list-style-type: none"> – <i>Table 17: Product history, Table 18: Board revision history, UKCA Compliance Statement, and Product disposal</i> |

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved