

Getting started with the STEVAL-ST25R300KA kit based on the ST25R300 high-performance NFC universal device and EMVCo reader

Introduction

The **STEVAL-25R300KA** is a ready-to-use kit based on the **ST25R300** high-performance NFC universal device for contactless applications. The kit allows evaluating this device features and functionality in the reader/writer, and card emulation modes.

The kit consists of:


- a microprocessor main board (STEVAL-M25B1), which includes hardware and software tools that enable using the entire STM32 ecosystem. This board is powered through USB connectors
- a reader expansion board (STEVAL-D25R300A), which embeds the **ST25R300** device and an antenna etched on the PCB with its tuning circuit

The communication link between the two boards is the SPI bus. The processor card provides the power. Specific data lines complete the pin connector assignment shared between the cards.

Thanks to several demonstrations that can be performed, this kit helps the users develop and test their applications.

The kit is FCC certified, with FCC ID: YCPR300AD1. It is also IC certified, with IC: 8976A-R300AD1; PMN: STEVAL-25R300KA; HVIN: STEVAL-25R300KA.

Figure 1. STEVAL-25R300KA kit (top view)

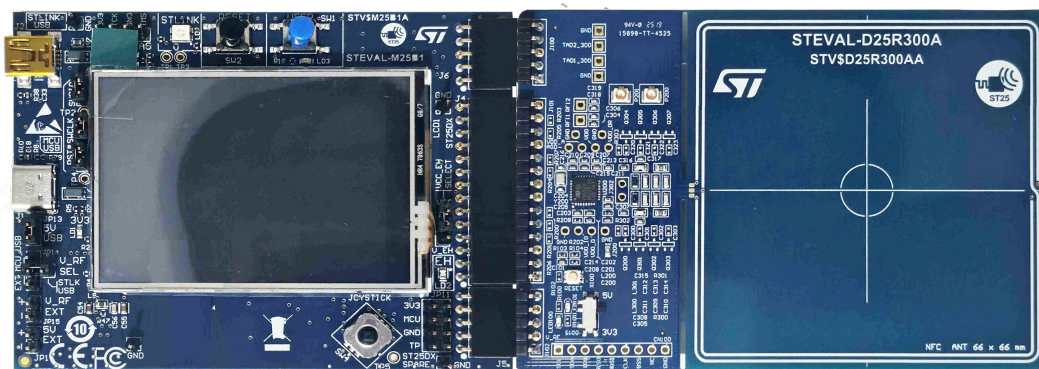

Notice: For dedicated assistance, submit a request through our online support portal at www.st.com/support.

1 Features

- NFC card reader IC: [ST25R300](#)
- 13.56 MHz inductive antenna etched on PCB and associated tuning circuit
- NFC Forum NFC-A, NFC-B, NFC-F, and NFC-V poller
- NFC Forum NFC-A, NFC-F listener
- Support for all five NFC Forum Tag types in reader mode
- NFC Forum Type 3 tag (NFC-F) host card emulation
- NFC Forum Type 4A tag (NFC-A) host card emulation
- Integrated inductive sensing system for low-power detection of a tag presence using I and Q measurement
- Dynamic Hight power output (DPO): Field strength is controlled to stay within given limits (software feature)
- User selectable and automatic gain control
- Serial peripheral interface (SPI) up to 10 Mb/s

2 Hardware overview


The main board PCB is usually connected to the PC via USB.

The STM32 MCU firmware controls the [ST25R300](#) via the extension connectors.

The 5 V supply of the USB bus powers both boards. An LDO converts this voltage down to 3.3 V to supply the microcontroller and the [ST25R300](#).

For the reader expansion board, you can select a 3.3 or 5 V RF powering. A green LED close to the motherboard micro-USB C plug indicates when the board is powered.

Figure 2. Hardware connection

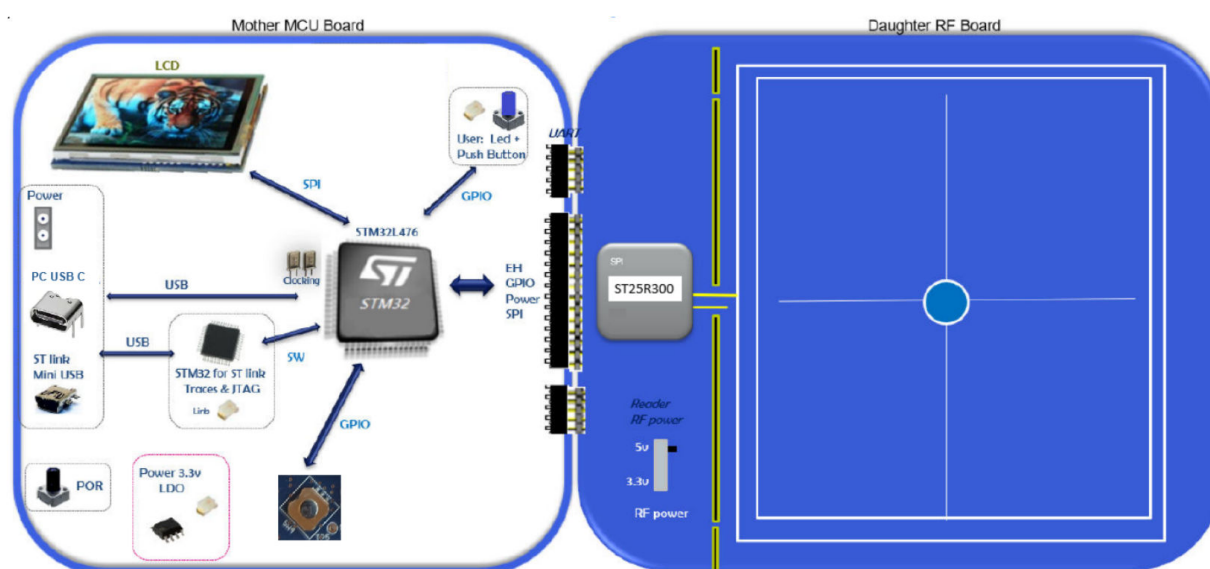

2.1 Main board hardware

The [STEVAL-M25B1](#) main board embeds a 32-bit microcontroller of the STM32L476 series, which is based on the Arm Cortex-M4 high-performance CPU with FPU. This board is powered through the USB. It includes:

- an [ST-LINK](#) in-circuit debugger and programmer for STM32 microcontrollers
- push buttons (reset and user)
- a mini-USB debug connector
- a user-dedicated USB-C connector
- support for ST NFC tag

Table 1. Powering options

Reference	Connector	Position	Description
1	JP13	Closed 1-2	Card powered by USB C
2	JP14	Closed 3-4	Card powered by miniUSB
3	JP15	Open	STEVAL-M25B1 board powering (specific feature)
4	JP16	Open	Card powered by an external source

Figure 3. STEVAL-M25B1 main board layout (top view)

1. Software bus (ST-LINK)
2. ST-LINK activity LED
3. Reset button
4. User button
5. User LED
6. Extension connectors
7. On-going tag detection indicator
8. Extension connector - GPIO setting
9. Joystick
10. Power 3.3 V LED
11. Powering options
12. User USB


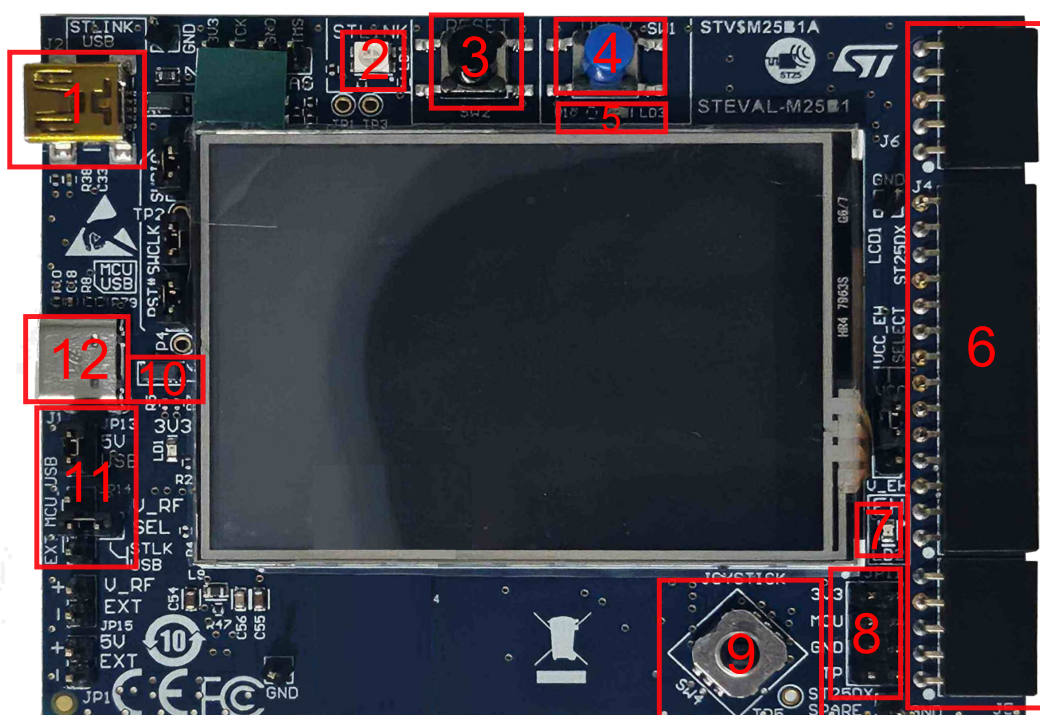


Figure 4. STEVAL-M25B1 main board layout (bottom view)

1. STM32L476 MCU
2. Test points for external connections
3. Regulator
4. STM32 ST-LINK

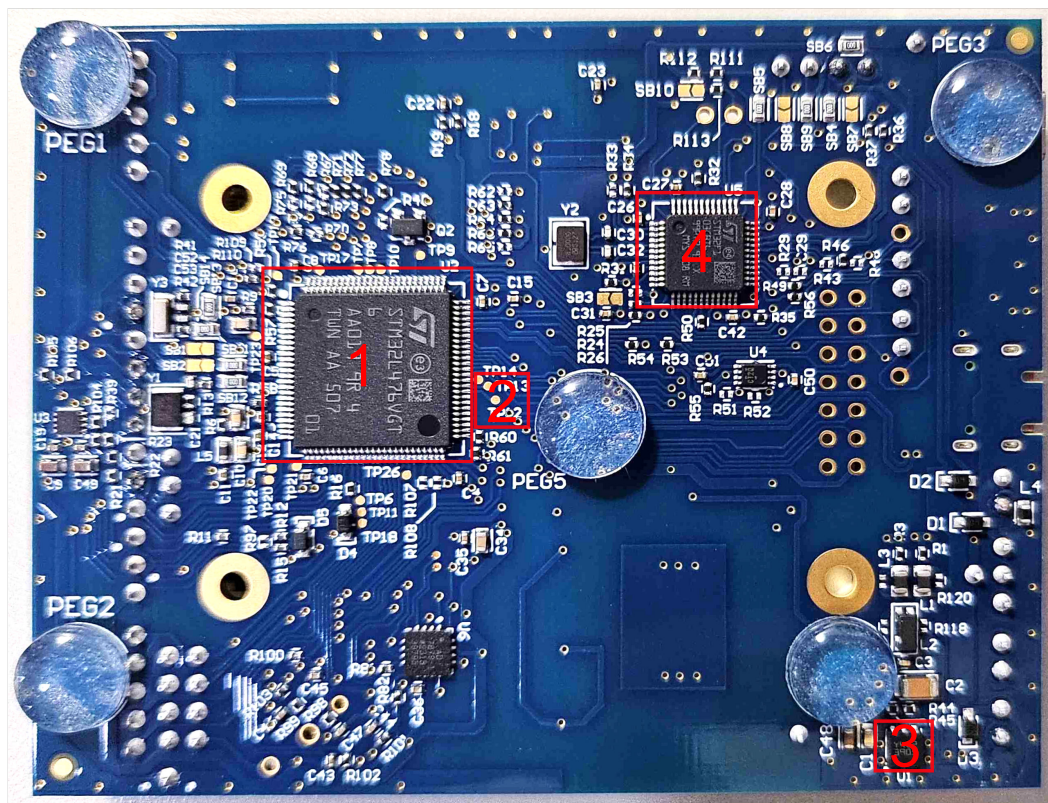

2.1.1 Jumper default configuration

The STEVAL-M25B1 jumpers are configured by default to power the kit through the miNI USB connector.

Figure 5. Jumper default configuration

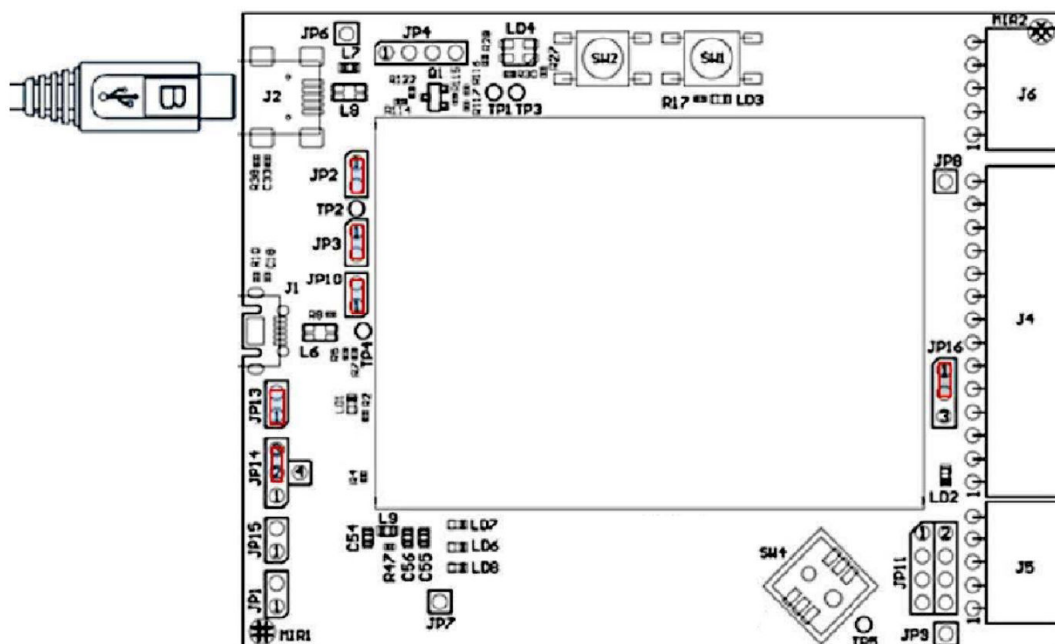


Table 2. Jumper default configuration

Connector	Position	Description
JP2	Closed 1-2	ST-LINK UART debug features
JP3		
JP10		
JP13	Closed 1-2	Card powered by USB C
JP14		Card powered by mini-USB
JP16	Closed 1-2	Board powering specific feature


2.1.2 Software development configuration

This section describes the software development configuration for the main board. It also describes the USB connection when using the embedded [ST-LINK](#).

The J1 USB-C connector powers the [STEVAl-25R300KA](#).

The J2 mini-USB allows exchanging data between the board and the computer.

Figure 6. Software development configuration

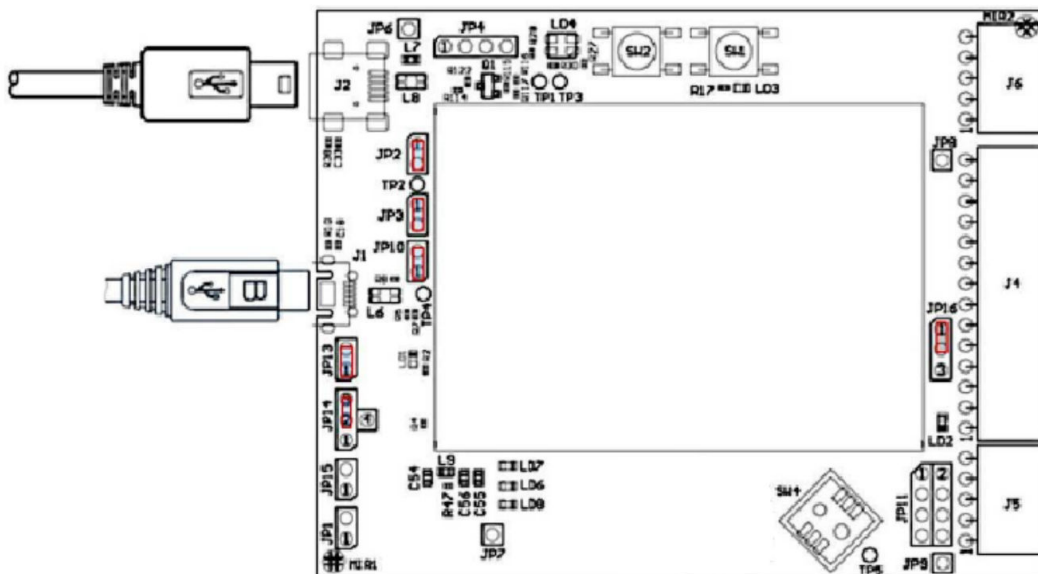

2.2 Expansion board hardware

The STEVAL-25R300KA reader expansion board embeds:

- ST25R300
- an antenna, with its own tuning circuit, etched on the PCB
- a switch to select 3.3 V or 5 V RF powering

The ST25R300 is directly connected to the filtered 5 V USB supply.

There are additional supply filtering components close to the NFC/HF reader IC. All the decoupling capacitors have been placed as close as possible to the ST25R300.

Figure 7. STEVAL-25R300KA expansion board layout (top view)

1. RF front-end area
2. ST25R300
3. RF powering selection switch (3.3 or 5 V)

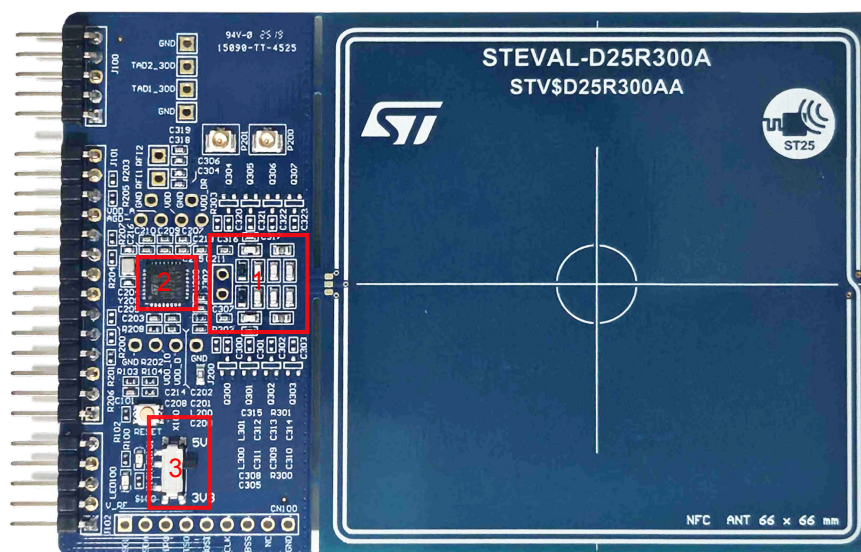


Figure 8. STEVAL-25R300KA expansion board layout (bottom view)



2.2.1 Antenna and matching network components

This board contains the matching network and the automatic antenna tuning capacitors based on varicap.

3 Getting started

3.1 System requirements

- A USB C port capable of delivering at least 500 mA at 5 V (2 W)
- A safety extra-low voltage (SELV) limited power source to supply the unit through the USB port
- A mini-USB cable to use the embedded [ST-LINK](#) and the STM32 ecosystem development

3.2 How to use the kit in standalone mode

Step 1. Connect the [STEVAL-25R300KA](#) main board to the reader expansion board.

Important: It must be used on a clean and non-flammable surface.

Step 2. The kit is delivered with the default jumper configuration. Power it through the mini-USB via a cable connected to the power source.

Step 3. Supply the unit through a safety extra-low voltage (SELV) limited power source via the USB port. The source must not exceed $60 V_{DC}/8 A/100 V$.
When powered up, the microcontroller starts the firmware, which is already downloaded in the flash memory. This allows demonstrating the [ST25R300](#) features:

- reader and writer
- card emulation
- automatic antenna tuning
- USB mode (refer to the next section for further details)

3.3 How to use the kit in USB mode


Step 1. Connect the [STEVAL-25R300KA](#) kit to a PC via a mini-USB cable.

Important: It must be used on a clean and non-flammable surface.

The PC USB port must be capable of delivering at least 250 mA at 5 V.

Step 2. To control the board, download the [STSW-ST25R022](#) software and install it.

Figure 9. STEVAL-M25B1 main board circuit schematic (1 of 9)

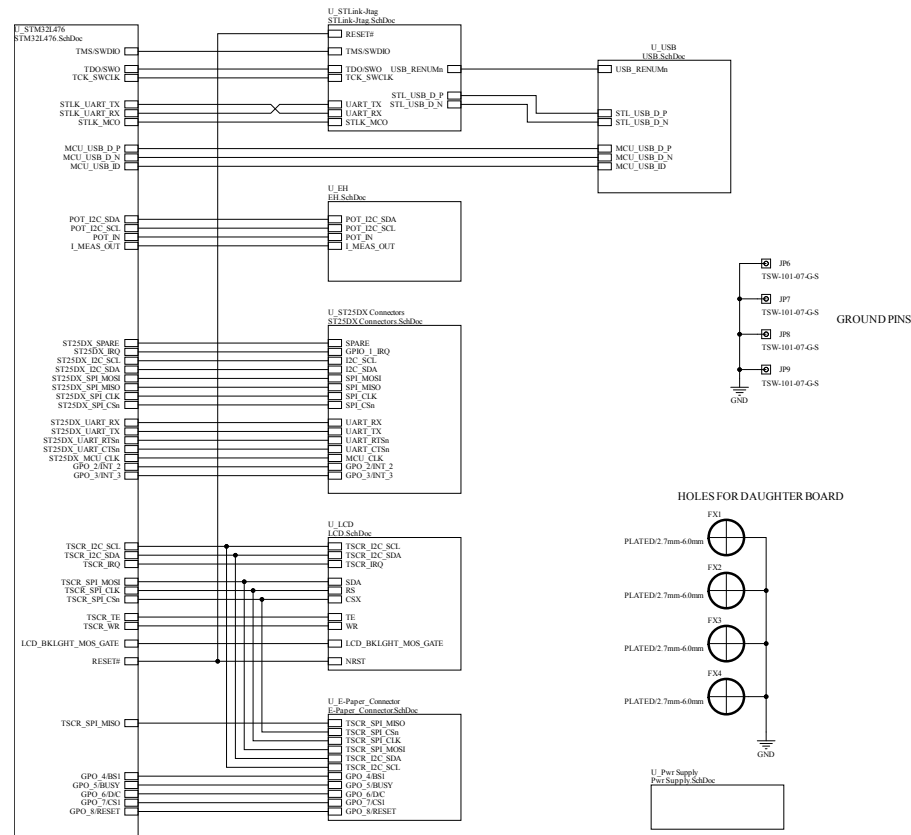

UM3511

Schematic diagrams

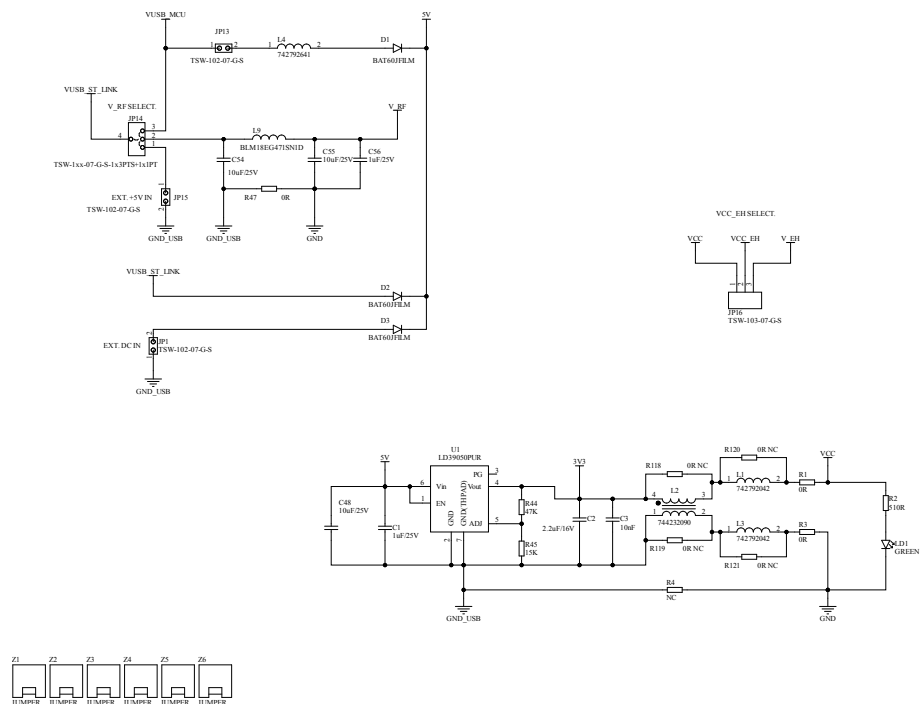


Figure 11. STEVAL-M25B1 main board circuit schematic (3 of 9)


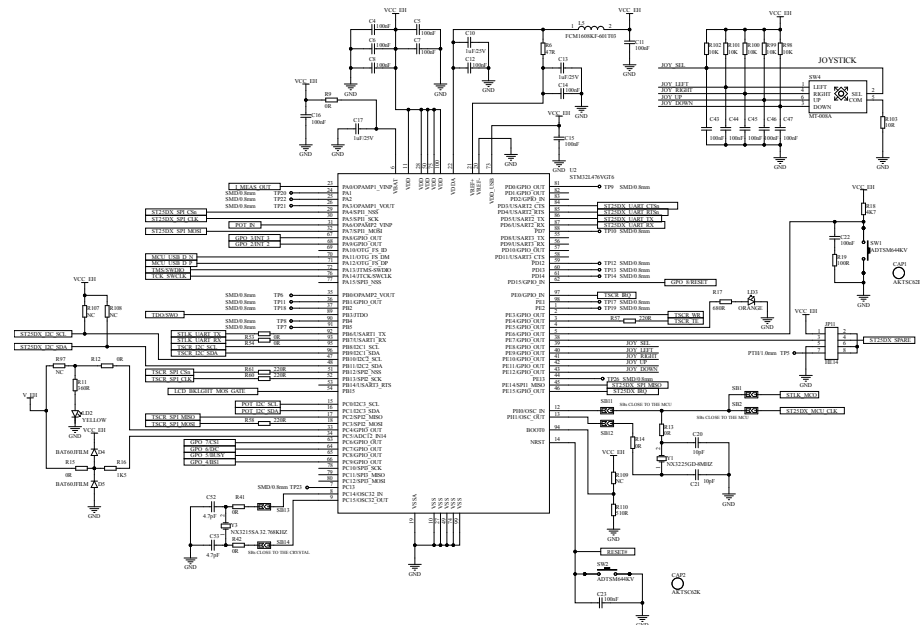


Figure 12. STEVAL-M25B1 main board circuit schematic (4 of 9)

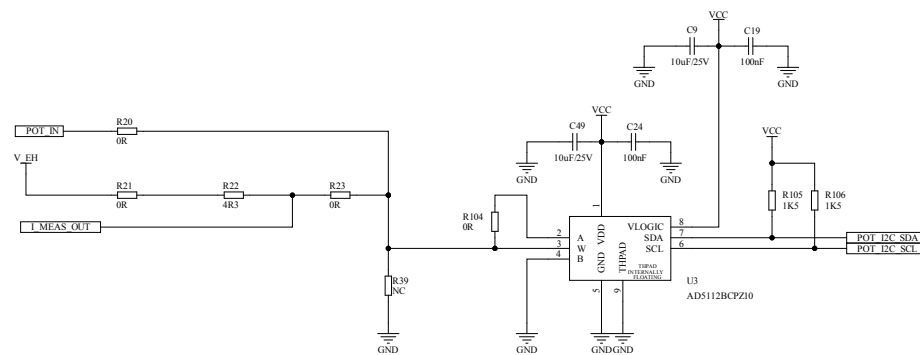

UM3511

Schematic diagrams

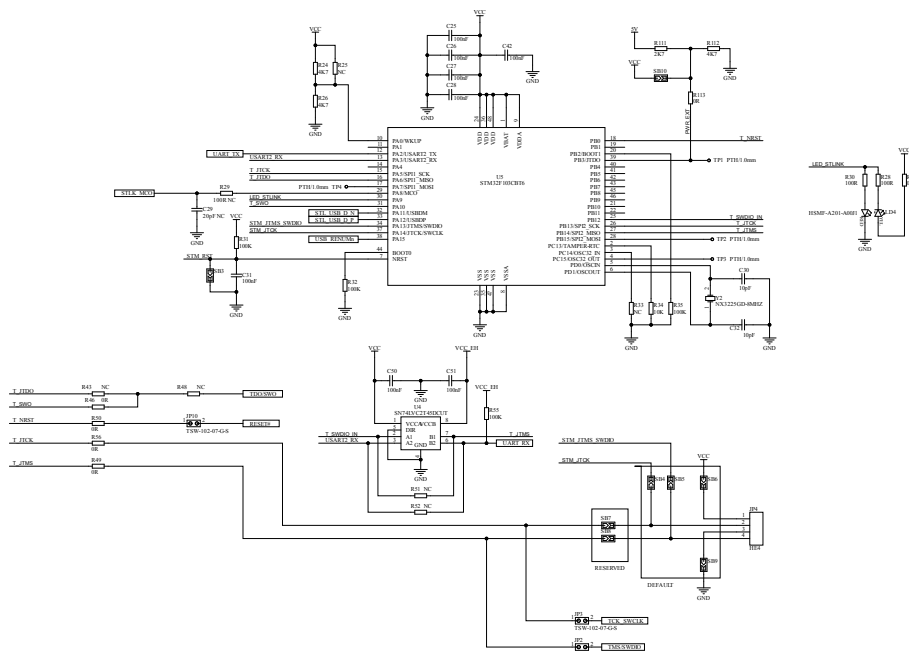


Figure 14. STEVAL-M25B1 main board circuit schematic (6 of 9)

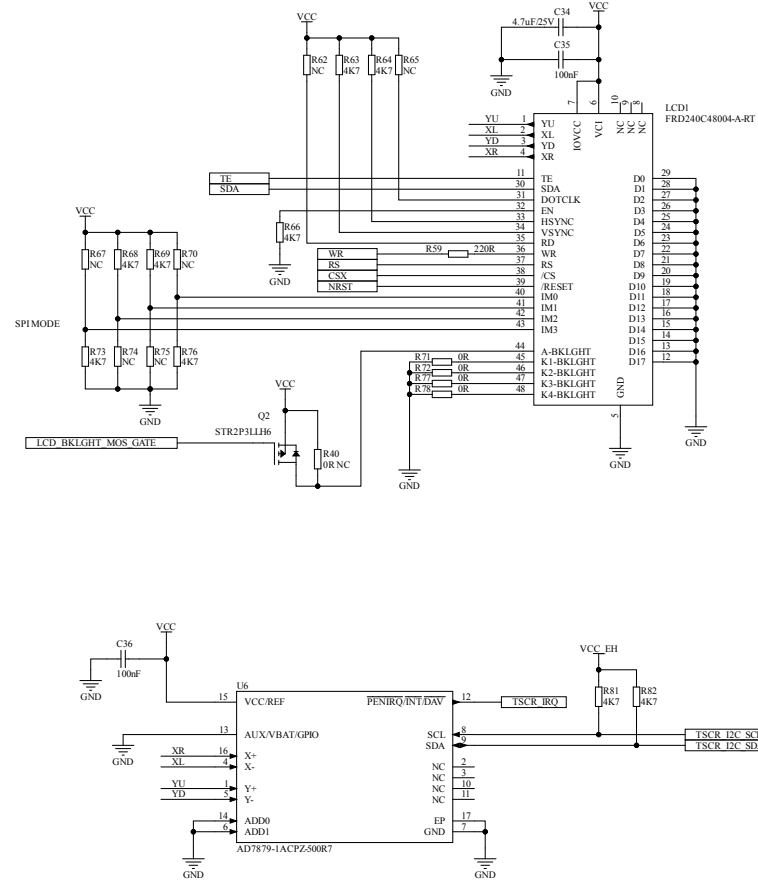


Figure 15. STEVAL-M25B1 main board circuit schematic (7 of 9)


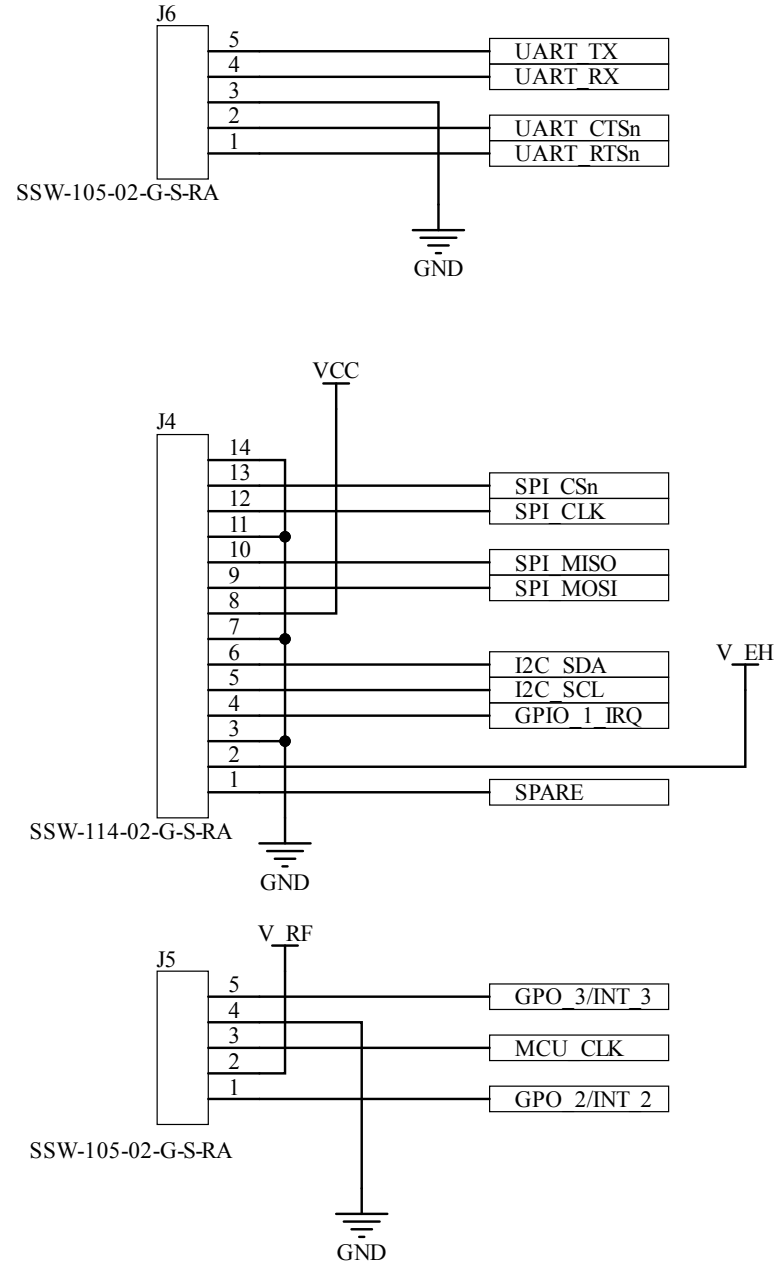


Figure 16. STEVAL-M25B1 main board circuit schematic (8 of 9)



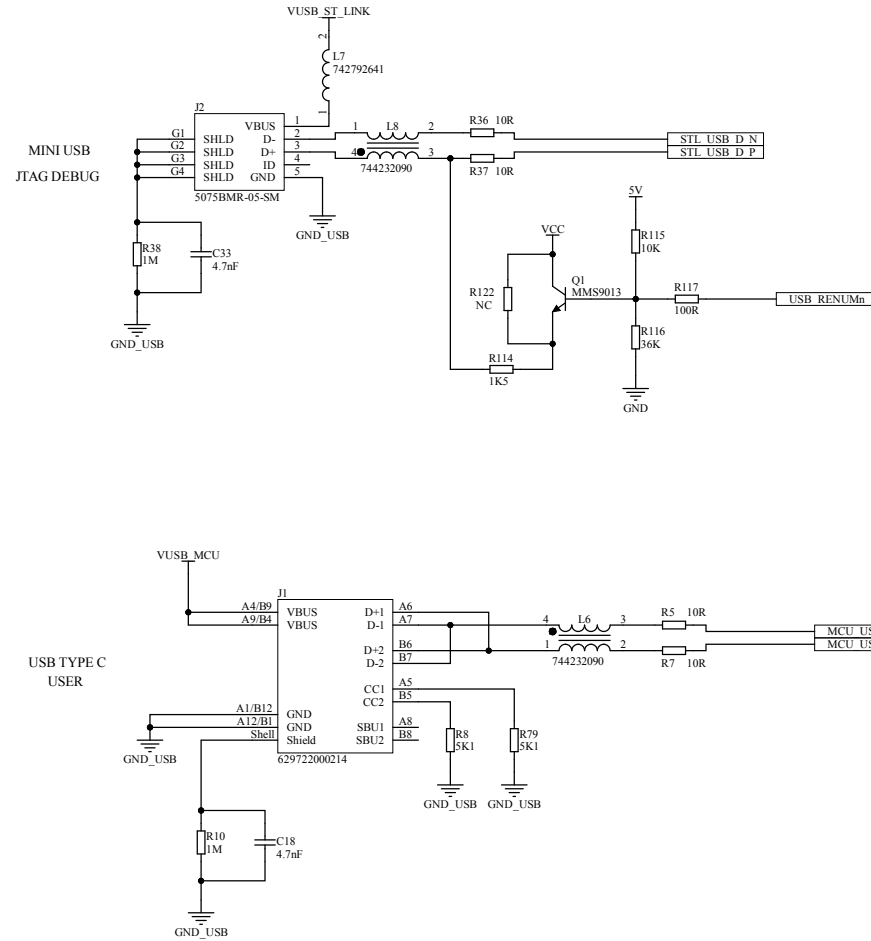

UM3511

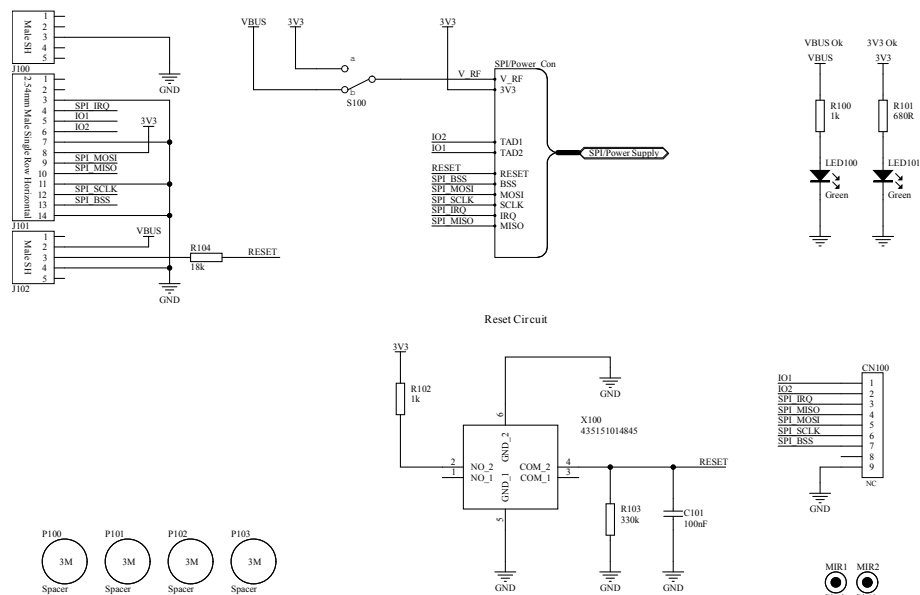


Figure 19. STEVAL-D25R300A reader expansion board circuit schematic (2 of 3)


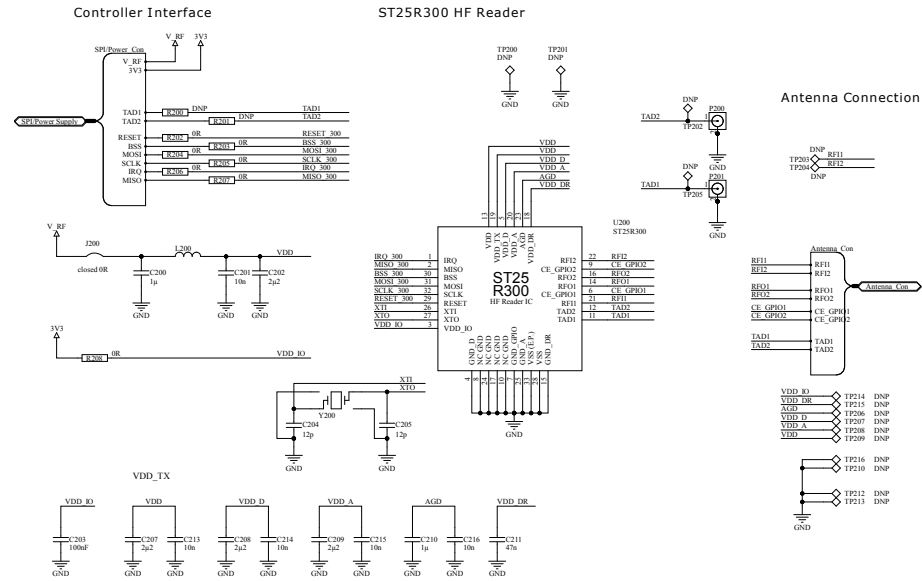


Figure 20. STEVAL-D25R300A reader expansion board circuit schematic (3 of 3)

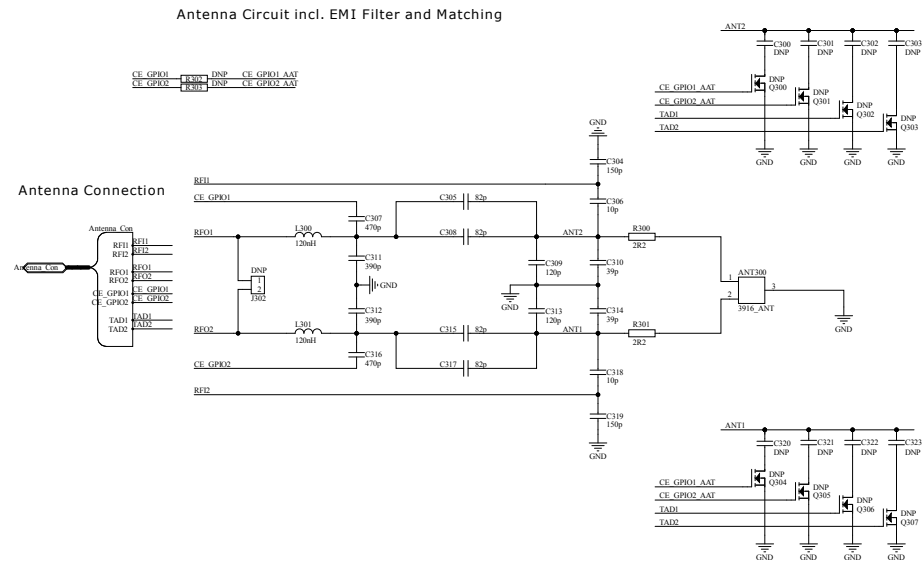

5 Bill of materials

Table 3. STEVAL-25R300KA bill of materials

Item	Q.ty	Ref.	Part/Value	Description	Manufacturer	Order code
1	1	-	Table 4. STEVA L-M25B1 bill of materials	-	ST	Not available for separate sale
2	1	-	Table 5. STEVA L-D25R300A bill of materials	-	ST	Not available for separate sale

Table 4. STEVAL-M25B1 bill of materials

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
1	5	C1, C10, C13, C17, C56	1uF	CAPACITOR 1uF 25V 10% X5R 0603	TDK	C1608X5R1E105K080A C
2	1	C2	2.2uF	CAPACITOR 2.2uF 16V 10% X7R 1206	KEMET	C1206C225K4RACTM
3	1	C3	10nF	CAPACITOR 10nF 16V 10% X7R 0402	KEMET	C0402T103K4RALTU
4	29	C4, C5, C6, C7, C8, C11, C12, C14, C15, C16, C19, C22, C23, C24, C25, C26, C27, C28, C31, C35, C36, C42, C43, C44, C45, C46, C47, C50, C51	100nF	CAPACITOR 100nF 16V 10% X7R 0402	Samsung	CL05B104KO54PNC
5	5	C9, C48, C49, C54, C55	10uF	CAPACITOR 10uF 25V 10% X5R 0603	Murata	GRM188R61E106KA73J
6	2	C18, C33	4.7nF	CAPACITOR 4.7nF 50V 10% X7R 0402	Murata	GRM155R71H472KA01D
7	4	C20, C21, C30, C32	10pF	CAPACITOR 10pF 50V 5% NPO 0402	KEMET	C0402C100J5GALTU
8	1	C29	20pF	CAPACITOR 20pF 0402 NOT FITTED	N/A	N/A
9	1	C34	4.7uF	CAPACITOR 4.7uF 25V 10% X5R 0603	TDK	C1608X5R1E475K080A C
10	2	C52, C53	4.7pF	CAPACITOR 4.7pF +/-0.25pF 50V NPO 0402	Yageo	CC0402CRNPO9BN4R7
11	1	CAP1		Châssis de commutateur / capuchons de commutateur Tact Switch	APEM	AKTSC62B
12	1	CAP2		Châssis de commutateur / capuchons de commutateur Tact Switch	APEM	AKTSC62K
13	5	D1, D2, D3, D4, D5		DIODE BAT60JFILM	STMicroelectronics	BAT60JFILM

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
14	1	J1		Conenctor USB 2.0 Type C Horizontal SMT	Würth Electronics	629722000214
15	1	J2		MINI USB B 5075BMR-05-SM	Samtec	MUSB-05-F-B-SM-A
16	1	J4		CONNECTOR SSW-114-02-G-S- RA	Samtec	SSW-114-02-G-S-RA
17	2	J5, J6		CONNECTOR SSW-105-02-G-S- RA	Samtec	SSW-105-02-G-S-RA
18	6	JP1, JP2, JP3, JP10, JP13, JP15		CONNECTOR TSW-102-07-G-S 1x2Pts	Samtec	TSW-102-07-G-S
19	2	JP4, JP14		CONNECTOR TSW-104-07-G-S 1x4Pts	Samtec	TSW-104-07-G-S
20	4	JP6, JP7, JP8, JP9		CONNECTOR TSW-101-07-G-S 1Pt	Samtec	TSW-101-07-G-S
21	1	JP11		CONNECTOR TSW-104-07-G-D 2x4Pts	Samtec	TSW-104-07-G-D
22	1	JP12		CONNECTOR CES-107-01-L-D	Samtec	CES-107-01-L-D
23	1	JP16		CONNECTOR TSW-103-07-G-S 1x3Pts	Samtec	TSW-103-07-G-S
24	2	L1, L3	600 Ohms	EMI FERRITE BEAD 600 Ohms 742792042	Würth Electronics	742792042
25	3	L2, L6, L8	90 Ohms	COMMON MODE FILTER 744232090	Würth Electronics	744232090
26	2	L4, L7	300 Ohms	EMI FERRITE BEAD 300 Ohms 742792641	Würth Electronics	742792641
27	1	L5	600 Ohms	FERRITE CHIP BEAD FCM1608KF-601T0 3	Tai Tech	FCM1608KF-601T03
28	1	L9	470 Ohms	SELF BLM18EG471SN1D	Murata	BLM18EG471SN1D
29	1	LCD1		LCD MODULE FRD240C48004-A- RT	FRIDA	FRD240C48004-A-RT
30	1	LD1		LED GREEN 19-21SYGC/S530- E1/TR8	Dialight	598-8060-107F
31	1	LD2		LED YELLOW TLMY1000-GS08	Vishay Semiconductor s	VLMY1300-GS08
32	1	LD3		LED ORANGE 19-217/S2C- AM2N2VY/3T	Vishay Lite-On	LTST-C191KFKT

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
33	1	LD4		LED BICOLOR HSMF-A201-A00J1	Broadcom Avago	HSMF-A201-A00J1
34	5	PEG1, PEG2, PEG3, PEG4, PEG5		SELF ADHESIVE RUBBER BUMPER SJ5306	3M	SJ-5306CLEAR
35	1	Q1		Bipolar Transistors - BJT NPN 40Vcbo 25Vceo 5Vebo 500mA 300mW	MCC	MMS9013L-TP
36	1	Q2		Transistor STR2P3LLH6 SOT23	STMicroelectro nics	STR2P3LLH6
37	26	R1, R3, R9, R12, R13, R14, R15, R20, R21, R23, R27, R41, R42, R46, R47, R49, R50, R53, R54, R56, R71, R72, R77, R78, R104, R113	0R	RESISTOR 0R 0402	Vishay	CRCW04020000Z0ED
38	2	R2, R110	510R	RESISTOR 510R 1% 0402	Vishay	CRCW0402510RFKED
39	17	R4, R25, R33, R39, R43, R48, R51, R52, R62, R65, R67, R70, R74, R75, R97, R109, R122		RESISTOR 0402 NOT FITTED	N/A	N/A
40	5	R5, R7, R36, R37, R103	10R	RESISTOR 10R 1% 0402	Vishay	CRCW040210R0FKED
41	1	R6	47R	RESISTOR 47R 1% 0402	Yageo	RC0402FR-0747RL
42	2	R8, R79	5K1	RESISTOR 5K1 1% 0402	Vishay	CRCW04025K10FKTD
43	2	R10, R38	1M	RESISTOR 1M 1% 0402	Vishay	CRCW04021M00FKED
44	1	R11	360R	RESISTOR 360R 1% 0402	Yageo	RC0402FR-07360RL
45	4	R16, R105, R106, R114	1K5	RESISTOR 1K5 1% 0402	Vishay	CRCW04021K50FKED
46	2	R107, R108	1K5	RESISTOR 1K5 1% 0402	Vishay	CRCW04021K50FKED
47	1	R17	680R	RESISTOR 680R 1% 0402	Vishay	CRCW0402680RFKED
48	13	R18, R24, R26, R63, R64, R66, R68, R69, R73, R76, R81, R82, R112	4K7	RESISTOR 4K7 1% 0402	Yageo	RC0402FR-134K7L
49	4	R19, R28, R30, R117	100R	RESISTOR 100R 1% 0402	Vishay Dale	CRCW0402100RFKED
50	1	R22	4R3	RESISTOR 4.3 Ohms 1% 0402	Vishay Dale	CRCW04024R30FKED
51	1	R29	100R	RESISTOR 100R 0402 NOT FITTED	N/A	N/A

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
52	4	R31, R32, R35, R55	100K	RESISTOR 100K 1% 0402	Vishay	CRCW0402100KFKED
53	7	R34, R98, R99, R100, R101, R102, R115	10K	RESISTOR 10K 1% 0402	Vishay Dale	CRCW040210K0FKEDH P
54	5	R40, R118, R119, R120, R121	0R	RESISTOR 0R 0402 NOT FITTED	N/A	N/A
55	1	R44	47K	RESISTOR 47K 1% 0402	Vishay	CRCW040247K0FKED
56	1	R45	15K	RESISTOR 15K 1% 0402	Vishay Dale	CRCW040215K0FKEDH P
57	5	R57, R58, R59, R60, R61	220R	RESISTOR 220R 1% 0402	Vishay	CRCW0402220RFKED
58	1	R111	2K7	RESISTOR 2K7 1% 0402	Vishay	CRCW04022K70FKED
59	1	R116	36K	RESISTOR 36K 1% 0402	Vishay	CRCW040236K0FKED
60	6	SB1, SB2, SB3, SB7, SB8, SB10		SOLDER BRIDGE OPEN SIZE 0603	N/A	N/A
61	8	SB4, SB5, SB6, SB9, SB11, SB12, SB13, SB14		SOLDER BRIDGE CLOSED SIZE 0603		
62	2	SW1, SW2		Interrupteurs de contact SW TACT SPST 0.05A 12VDC 6MM	APEM	ADTSM644KV
63	1	SW4		JOYSTICK MT-008A	SparkFun	COM-10063
64	5	TP1, TP2, TP3, TP4, TP5		PLATED HOLE DIAM. 1.0mm	Keystone Electronics	5001
65	17	TP6, TP7, TP8, TP9, TP10, TP11, TP12, TP13, TP14, TP17, TP18, TP19, TP20, TP21, TP22, TP23, TP26		TESTPOINT COPPER LAND DIAM. 0.8mm	Multicomp	TEST-12
66	1	U1		REGUL LDO LD39050PUR	STMicroelectronics	LD39050PUR
67	1	U2		IC STM32L476VGT6 LQFP100	STMicroelectronics	STM32L476VGT6
68	1	U3		DIGITAL POT AD5112BCPZ10	Analog Devices	AD5112BCPZ10-500R7
69	1	U4		LEVEL SHIFTER SN74LVC2T45DCUT VSSOP8	Texas Instruments	SN74LVC2T45DCUT
70	1	U5		IC STM32F103CBT6 LQFP48	STMicroelectronics	STM32F103CBT6

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
71	1	U6		IC SCREEN CNTRL 12BIT 16LFCSP	Analog Devices	AD7879-1ACPZ-500R7
72	2	Y1, Y2		SMD CRYSTAL NX3225GD-8MHZ- EXS00A-CG04874	NDK	NX3225GD-8MHZ-STD- CRA-3
73	1	Y3		SMD CRYSTAL NX3215SA 32.768KHZ	NDK	NX3215SA-32.768K- STD-MUA-8
74	6	Z1, Z2, Z3, Z4, Z5, Z6		Carte de CI WR- PHD 2.54mm Jumper with Test Point	Wurth Electronics	60900213421

Table 5. STEVAL-D25R300A bill of materials

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
1	1	U200			ST	ST25R300-AQET
2	1	X100			Wurth Elektronik	435151014845
3	1	S100			C & K COMPONENT S	PCM12SMTR
4	1	Y200			NDK	CS01188-27.12M
5	2	C303, C323	68pF	68pF $\pm 1\%$ 50V COG, NP0 0402	Murata	GRT1555C1H680FA02J
6	2	LED100, LED101			Lite-On	LTST-C190KGKT
7	4	R200, R201, R302, R303		210 ohm, 50 V, 0402, >100 mW, $\pm 1\%$	MULTICOMP	MC00625W040210R
8	7	R202, R203, R204, R205, R206, R207, R208	210 Ohm	210 ohm, 50 V, 0402, >100 mW, $\pm 1\%$	MULTICOMP	MC00625W040210R
9	1	R100, R102	1 kohm	1 kohm, 50 V, 0402, >100 mW, $\pm 5\%$	Panasonic	ERJ2GEJ102X
10	2	R300, R301	2.2 Ohm	2.2 Ohm $\pm 1\%$ 0.1W, 1/10W Chip Resistor 0603	Vishay Dale	CRCW06032R20FKEA
11	2	C310, C314	39pF	39pF $\pm 1\%$ 50V COG, NP0 0603	KEMET	C0603C390F5GACTU
12	2	C305, C317	82pF	82pF $\pm 1\%$ 50V COG, NP0 0402	YAGEO	CC0402FRNP09BN820
13	2	C308, C315	82pF	82pF $\pm 1\%$ 50V COG, NP0 0603	KEMET	C0603C820F5GACTU
14	2	C309, C313	120pF	120pF $\pm 1\%$ 50V COG, NP0 0603	KEMET	C0603C121F5GACAU TO
16	1	R103	330 kohm	330 kohm, 50 V, 0402, >62.5 mW, $\pm 1\%$	VISHAY	CRCW0402330KFKED
17	1	R104	18 kohm	18 kohm, 50V, 0402, >62.5 mW, $\pm 1\%$	MULTICOMP	MCWR04X1802FTL

Item	Q.ty	Ref.	Part / Value	Description	Manufacturer	Order code
18	2	C311, C312	390pF	390pF ±1% 50V C0G, NP0 0603	KEMET	C0603C391F5GACTU
19	5	C201, C213, C214, C215, C216	0.01 µF	0402, 0.01 µF, 25 V, ± 10%, X7R	AVX	04023C103KAT2A
20	2	C200, C210	1 µF	0402, 1 µF, 16 V, ± 10%, X5R,	MURATA	GRM155R61C105KA12D
21	4	C202, C207, C208, C209	2.2 µF	0402, 2.2 µF, 6.3 V, ± 20%, X5R	MURATA	GRM155R60J225ME01D
22	2	C307, C316	470pF	470pF ±1% 50V C0G 0402	Murata	GRT1555C1H471FA02D
23	1	R101	680 Ohm	680 Ohm ±5% 0.063W, 1/16W Chip Resistor 0402	Yageo	RC0402JR-07680RL
24	2	C300, C320	6.8pF	AEC-Q200 6.8pF ±0.1pF 50V C0G 0402	MURATA	GCM1555C1H6R8BA16 D
25	2	C306, C318	10pF	AEC-Q200 10pF ±1% 50V C0G 0402	MURATA	GCM1555C1H100FA16D
26	2	C204, C205	12pF	AEC-Q200 12pF ±1% 50V C0G 0402	MURATA	GCM1555C1H120FA16D
27	2	C301, C321	12pF	AEC-Q200 12pF ±1% 50V C0G 0402	MURATA	GCM1555C1H120FA16D
28	2	C302, C322	27pF	AEC-Q200 27pF ±1% 50V C0G 0402	MURATA	GCM1555C1H270FA16D
29	1	C211	47nF	AEC-Q200 47nF ±10% 10V 0402	MURATA	GCM155R71E473KA55D
30	2	C101, C203	100nF	AEC-Q200 100nF ±10% 50V 0402	MURATA	GCM155R71H104KE02J
31	2	C304, C319	150pF	AEC-Q200 150pF ±1% 50V C0G 0402	MURATA	GCM1555C1H151FA16D
32	1	J101			Samtec	TSW-114-08-G-S-NA
33	2	J100, J102			Samtec	TSW-105-08-G-S-NA
34	4	P100, P101, P102, P103			3M	SJ-5306 CLEAR
35	2	L300, L301	120nH		Murata	LQW18CNR12J0ZD
36	8	Q300, Q301, Q302, Q303, Q304, Q305, Q306, Q307			Diodes Incorporated	BSS123WQ-7-F
37	1	L200	120 Ohm		muRata	BLM15EG121SH1D
38	2	P200, P201			HIROSE(HRS)	U.FL-R-SMT-1(10)

6 Kit versions

Table 6. STEVAL-25R300KA versions

PCB version	Schematic diagrams	Bill of materials
STV\$25R300KAA ⁽¹⁾	STV\$25R300KAA schematic diagrams	STV\$25R300KAA bill of materials

1. This code identifies the STEVAL-25R300KA evaluation kit first version. The kit consists of a main board STEVAL-M25MB1 whose version is identified by the code STV\$M25MB1A and a reader expansion board STEVAL-D25R300 whose version is identified by the code STEVAL\$D25R300A.

7 Regulatory compliance information

Notice for US Federal Communication Commission (FCC)

Part 15.19

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Part 15.21

Any changes or modifications to this equipment not expressly approved by STMicroelectronics may cause harmful interference and void the user's authority to operate this equipment.

Part 15.105

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC ID: YCPR300AD1

Notice for Innovation, Science and Economic Development Canada (ISED)

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

[only if EMC testing performed on the radio board as well:]

This class B device complies with Canadian Interference-Causing Equipment Standard ICES-003: CAN ICES-003(B) / NMB-003(B)

Conformité à Innovation, Sciences et Développement Économique Canada (ISDE)

L'émetteur/recepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes: (1) L'appareil ne doit pas produire de brouillage; (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. Les changements ou modifications non expressément approuvés par la partie responsable de la conformité pourraient annuler l'autorité de l'utilisateur à faire fonctionner l'équipement.

[only if EMC testing performed on the radio board as well:]

Cet appareil numérique de classe B est conforme à la Norme sur le Matériel Brouilleur NMB-003 du Canada: CAN ICES-003(B) / NMB-003(B)

IC: 8976A-R300AD1; PMN: STEVAL-25R300KA ; HVIN: STEVAL-25R300KA

Notice for the European Union

The kit STEVAL-25R300KA is in conformity with the essential requirements of the Directive 2014/53/EU (RED) and of the Directive 2011/65/EU (RoHS II), including subsequent revisions and additions, as well as amended by the Delegated Directive 2015/863/EU (RoHS III). Applied harmonized standards are listed in the EU Declaration of Conformity.

Notice for the United Kingdom

The kit STEVAL-25R300KA is in conformity with the essential requirements of the Directive 2014/53/EU (RED) and of the Directive 2011/65/EU (RoHS II), including subsequent revisions and additions, as well as amended by the Delegated Directive 2015/863/EU (RoHS III). Applied harmonized standards are listed in the UK Declaration of Conformity.

Revision history

Table 7. Document revision history

Date	Revision	Changes
01-Jul-2025	1	Initial release.

Contents

1	Features	2
2	Hardware overview	3
2.1	Main board hardware	3
2.1.1	Jumper default configuration	5
2.1.2	Software development configuration	6
2.2	Expansion board hardware	7
2.2.1	Antenna and matching network components	8
3	Getting started	9
3.1	System requirements	9
3.2	How to use the kit in standalone mode	9
3.3	How to use the kit in USB mode	9
4	Schematic diagrams	10
5	Bill of materials	19
6	Kit versions	25
7	Regulatory compliance information	26
	Revision history	28
	List of tables	30
	List of figures	31

List of tables

Table 1.	Powering options	3
Table 2.	Jumper default configuration	6
Table 3.	STEVAL-25R300KA bill of materials	19
Table 4.	STEVAL-M25B1 bill of materials	19
Table 5.	STEVAL-D25R300A bill of materials	23
Table 6.	STEVAL-25R300KA versions	25
Table 7.	Document revision history	28

List of figures

Figure 1.	STEVAL-25R300KA kit (top view)	1
Figure 2.	Hardware connection	3
Figure 3.	STEVAL-M25B1 main board layout (top view).	4
Figure 4.	STEVAL-M25B1 main board layout (bottom view)	5
Figure 5.	Jumper default configuration	6
Figure 6.	Software development configuration	7
Figure 7.	STEVAL-25R300KA expansion board layout (top view)	7
Figure 8.	STEVAL-25R300KA expansion board layout (bottom view)	8
Figure 9.	STEVAL-M25B1 main board circuit schematic (1 of 9)	10
Figure 10.	STEVAL-M25B1 main board circuit schematic (2 of 9)	11
Figure 11.	STEVAL-M25B1 main board circuit schematic (3 of 9)	12
Figure 12.	STEVAL-M25B1 main board circuit schematic (4 of 9)	12
Figure 13.	STEVAL-M25B1 main board circuit schematic (5 of 9)	13
Figure 14.	STEVAL-M25B1 main board circuit schematic (6 of 9)	14
Figure 15.	STEVAL-M25B1 main board circuit schematic (7 of 9)	15
Figure 16.	STEVAL-M25B1 main board circuit schematic (8 of 9)	16
Figure 17.	STEVAL-M25B1 main board circuit schematic (9 of 9)	17
Figure 18.	STEVAL-D25R300A reader expansion board circuit schematic (1 of 3)	17
Figure 19.	STEVAL-D25R300A reader expansion board circuit schematic (2 of 3)	18
Figure 20.	STEVAL-D25R300A reader expansion board circuit schematic (3 of 3)	18

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved