
Getting started with MotionGR real-time gesture recognition library in X-CUBE-MEMS1 expansion for STM32Cube

Introduction

The MotionGR is a middleware library part of X-CUBE-MEMS1 software and runs on STM32. It provides real-time information about the gesture just performed by the user with the device, such as a cell phone.

It is able to distinguish the following gestures: pick up, glance, wake up.

This library is intended to work with ST MEMS only.

The algorithm is provided in static library format and is designed to be used on STM32 microcontrollers based on the ARM[®] Cortex[®]-M3, ARM[®] Cortex[®]-M4 or ARM[®] Cortex[®]-M7 architecture.

It is built on top of STM32Cube software technology that eases portability across different STM32 microcontrollers.

The software comes with sample implementation running on X-NUCLEO-IKS01A2 or X-NUCLEO-IKS01A3 expansion board on a NUCLEO-F401RE, NUCLEO-L476RG or NUCLEO-L152RE development board.

1 Acronyms and abbreviations

Table 1. List of acronyms

Acronym	Description
API	Application programming interface
BSP	Board support package
GUI	Graphical user interface
HAL	Hardware abstraction layer
IDE	Integrated development environment

2 MotionGR middleware library in X-CUBE-MEMS1 software expansion for STM32Cube

2.1 MotionGR overview

The MotionGR library expands the functionality of the [X-CUBE-MEMS1](#) software.

The library acquires data from the accelerometer and provides information about the gesture just performed by the user with the device.

The library is designed for ST MEMS only. Functionality and performance when using other MEMS sensors are not analyzed and can be significantly different from what described in the document.

Sample implementation is available for [X-NUCLEO-IKS01A2](#) and [X-NUCLEO-IKS01A3](#) expansion boards, mounted on a [NUCLEO-F401RE](#), [NUCLEO-L476RG](#) or [NUCLEO-L152RE](#) development board.

2.2 MotionGR library

Technical information fully describing the functions and parameters of the MotionGR APIs can be found in the `MotionGR_Package.chm` compiled HTML file located in the Documentation folder.

2.2.1 MotionGR library description

The MotionGR gesture recognition library manages the data acquired from the accelerometer; it features:

- possibility to distinguish among the following activities: pick up, glance, wake up
- recognition based only on accelerometer data
- required accelerometer data sampling frequency is 50 Hz
- resources requirements:
 - Cortex-M3: 9.8 kB of code and 4.4 kB of data memory
 - Cortex-M4: 9.5 kB of code and 4.4 kB of data memory
 - Cortex-M7: 6.9 kB of code and 4.4 kB of data memory
- available for Cortex-M3, Cortex-M4 and Cortex-M7 architectures

2.2.2 MotionGR APIs

The MotionGR library APIs are:


- `uint8_t MotionGR_GetLibVersion(char *version)`
 - retrieves the library version
 - `*version` is a pointer to an array of 35 characters
 - returns the number of characters in the version string
- `void MotionGR_Initialize(void)`
 - performs MotionGR library initialization and setup of the internal mechanism
 - the CRC module in STM32 microcontroller (in RCC peripheral clock enable register) has to be enabled before using the library

Note: This function must be called before using the accelerometer calibration library

- `void MotionGR_Update (MGR_input_t *data_in, MGR_output_t *data_out)`
 - executes gesture recognition algorithm
 - `*data_in` parameter is a pointer to a structure with input data
 - the parameters for the structure type `MGR_input_t` are:
 - `AccX` is the accelerometer sensor value in X axis in g
 - `AccY` is the accelerometer sensor value in Y axis in g
 - `AccZ` is the accelerometer sensor value in Z axis in g
 - `*data_out` parameter is a pointer to an enum with the following items:
 - `MGR_NOGESTURE = 0`
 - `MGR_PICKUP = 1`
 - `MGR_GLANCE = 2`
 - `MGR_WAKEUP = 3`


- `void MotionGR_SetOrientation_Acc (const char *acc_orientation)`
 - this function is used to set the accelerometer data orientation
 - configuration is usually performed immediately after the `MotionGR_Initialize` function call
 - `*acc_orientation` parameter is a pointer to a string of three characters indicating the direction of each of the positive orientations of the reference frame used for accelerometer data output, in the sequence x, y, z. Valid values are: n (north) or s (south), w (west) or e (east), u (up) or d (down).
 - As shown in the figure below, the [X-NUCLEO-IKS01A2](#) accelerometer sensor has an NWU orientation (x-North, y-West, z-Up), so the string is: “nwu”.

Figure 1. Example of sensor orientations

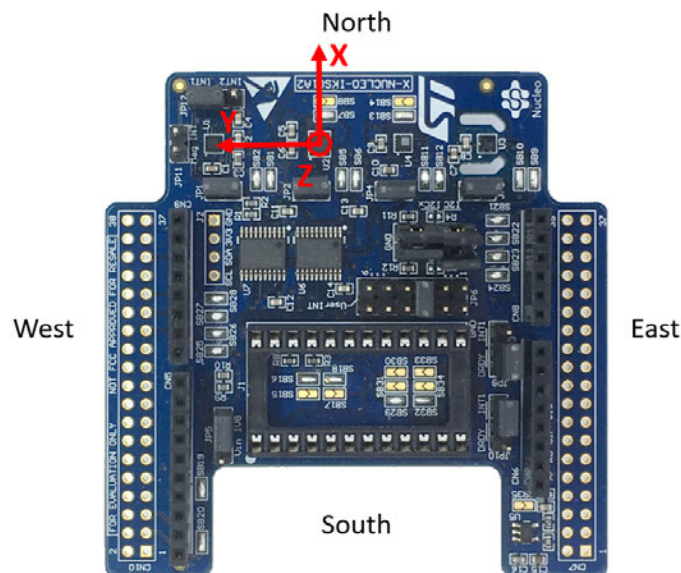

2.2.3 API flow chart

Figure 2. MotionGR API logic sequence

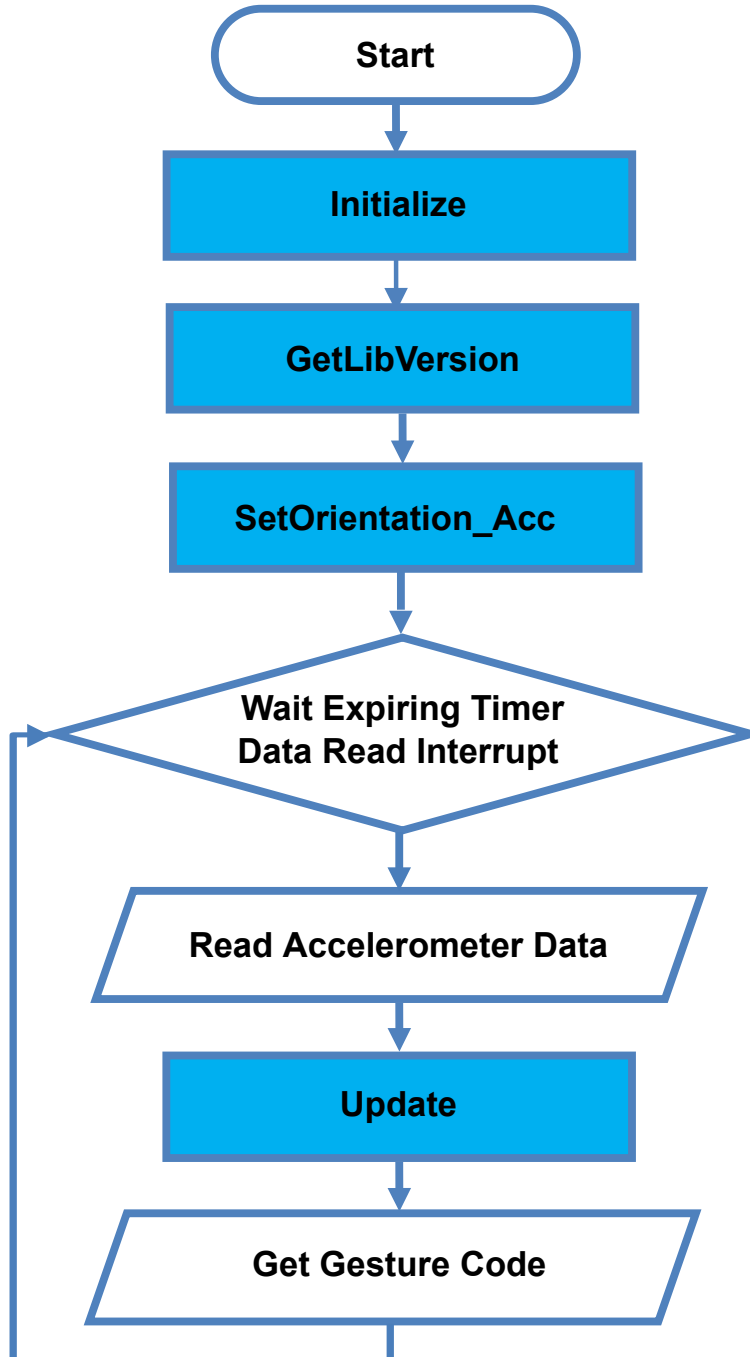

2.2.4 Demo code

The following demonstration code reads data from accelerometer sensor and gets the activity code.

```
[...]
#define VERSION_STR LENG 35
[...]

/** Initialization **/
char lib_version[VERSION_STR LENG];
char acc_orientation[3];

/* Gesture recognition API initialization function */
MotionGR_Initialize();

/* Optional: Get version */
MotionGR_GetLibVersion(lib_version);

/* Set accelerometer orientation */
acc_orientation[0] = 'n';
acc_orientation[1] = 'w';
acc_orientation[2] = 'u';
MotionGR_SetOrientation_Acc(acc_orientation);

[...]

/** Using Gesture Recognition algorithm **/
Timer_OR_DataRate_Interrupt_Handler()
{
MGR_input_t data_in;
MGR_output_t data_out;

/* Get acceleration X/Y/Z in g */
MEMS_Read_AccValue(&data_in.AccX, &data_in.AccY, &data_in.AccZ);

/* Gesture recognition algorithm update */
MotionGR_Update(&data_in, &data_out);
}
```

2.2.5 Algorithm performance

The gesture recognition algorithm only uses data from the accelerometer and runs at a low frequency (50 Hz) to reduce power consumption.

It detects and provides real-time information on the following user gestures:

- pick up: raising/lifting the board from a table;
- glance: approximately 30° rotation of the board, similar to the gesture of rotating a phone to glance at it;
- wake up: shaking action.

Table 2. Cortex-M4 and Cortex-M3: elapsed time (µs) algorithm

Cortex-M4 STM32F401RE at 84 MHz									Cortex-M3 STM32L152RE at 32 MHz								
STM32CubeIDE 1.2.0			IAR EWARM 8.32.3			Keil µVision 5.27			STM32CubeIDE 1.2.0			IAR EWARM 8.32.3			Keil µVision 5.27		
Min	Avg	Max	Min	Avg	Max	Min	Avg	Max	Min	Avg	Max	Min	Avg	Max	Min	Avg	Max
3	364	523	167	245	354	240	651	758	36	1215	1632	563	815	1173	495	687	935

Table 3. Cortex-M7: elapsed time (µs) algorithm

Cortex-M7 STM32F767ZI at 96 MHz								
STM32CubeIDE 1.2.0			IAR EWARM 8.32.3			Keil µVision 5.27		
Min	Avg	Max	Min	Avg	Max	Min	Avg	Max
165	168	221	36	53	98	38	56	87

2.3 Sample application

The MotionGR middleware can be easily manipulated to build user applications; a sample application is provided in the Application folder.

It is designed to run on a [NUCLEO-F401RE](#), [NUCLEO-L476RG](#) or [NUCLEO-L152RE](#) development board connected to an [X-NUCLEO-IKS01A2](#) or [X-NUCLEO-IKS01A3](#) expansion board.

The application recognizes performed gestures in real-time. Data can be displayed through a GUI or stored in the board for offline analysis. The algorithm recognizes: pick up, glance, wake up.

Stand-alone mode


In stand-alone mode, the sample application allows the user to detect performed gesture and store it in the MCU flash memory.

The STM32 Nucleo board may be supplied by a portable battery pack (to make the user experience more comfortable, portable and free of any PC connections).

Table 4. Power supply scheme

Power source	JP1 settings	Working mode
USB PC cable	JP1 open	PC GUI driven mode
Battery pack	JP1 closed	Stand-alone mode

Figure 3. STM32 Nucleo: LEDs, button, jumper

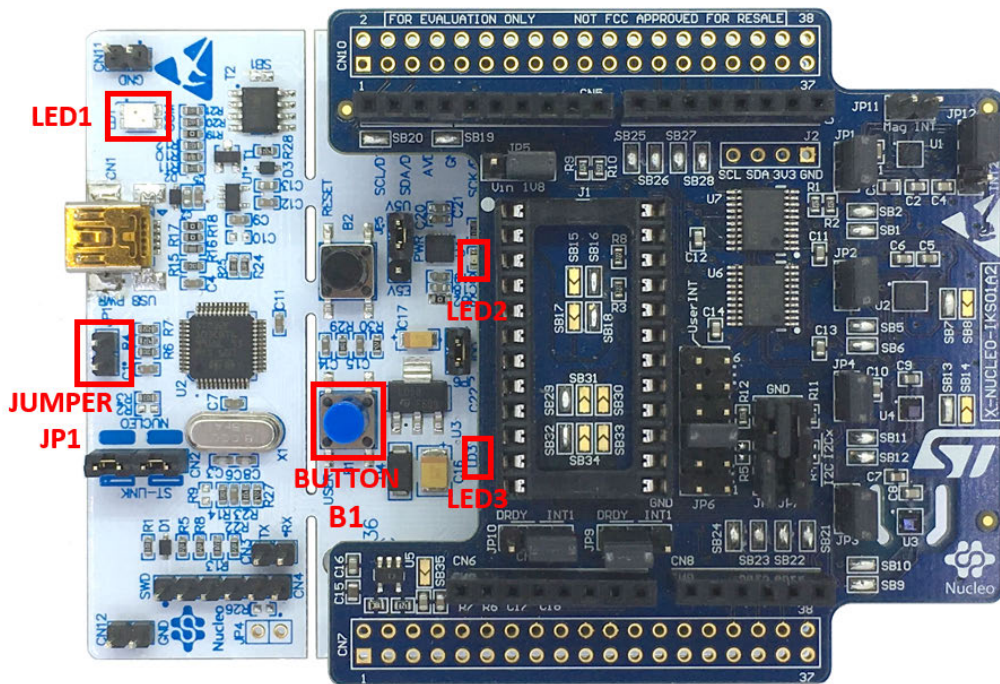

The above figure shows the user button B1 and the three LEDs of the NUCLEO-F401RE board. Once the board is powered, LED LD3 (PWR) turns ON and the tricolor LED LD1 (COM) begins blinking slowly due to the missing USB enumeration (refer to UM1724 on www.st.com for further details).

After powering the board, LED LD2 blinks once indicating the application is ready.

When the user button B1 is pressed, the system starts acquiring data from the accelerometer sensor and detects the gesture; during this acquisition mode, a fast LED LD2 blinking indicates that the algorithm is running. During this phase, the detected device gesture is stored in the MCU internal flash memory. Data are automatically saved every 5 minutes to avoid excessive data loss in case of an unforeseen power fault.

Pressing button B1 a second time stops the algorithm and data storage and LED LD2 switches off.

Pressing the button again starts the algorithm and data storage once again.

The flash sector dedicated to data storage is 128 KB, allowing memorization of more than 16,000 data sets.

To retrieve those data, the board has to be connected to a PC, running Unicleo-GUI. When stored data is retrieved via the GUI, the MCU flash sector dedicated to this purpose is cleared.

If LED LD2 is ON after powering the board, it represents a warning message indicating the flash memory is full.

Note:

Optionally, the MCU memory can be erased by holding the user push button down for at least 5 seconds. LED LD2 switches OFF and then blinks 3 times to indicate that the data stored in the MCU has been erased. This option is available only after power ON or reset of the board while LED LD2 is ON indicating the flash memory is full.

When the application runs in stand-alone mode and the flash memory is full, the application switches to PC GUI drive mode and LED LD2 switches OFF.

The flash memory must be erased by downloading data via the Unicleo-GUI or the user push button (see the above note).

PC GUI drive mode

In this mode, a USB cable connection is required to monitor real-time data. The board is powered by the PC via USB connection. This working mode allows the user to display detected gesture, accelerometer data, time stamp and eventually other sensor data, in real-time, using the Unicleo-GUI.


In this working mode, data are not stored in the MCU flash memory.

2.4 Unicleo-GUI application

The sample application uses the Windows **Unicleo-GUI** utility, which can be downloaded from www.st.com.


- Step 1.** Ensure that the necessary drivers are installed and the **STM32 Nucleo** board with appropriate expansion board is connected to the PC.
- Step 2.** Launch the Unicleo-GUI application to open the main application window.
If an STM32 Nucleo board with supported firmware is connected to the PC, it is automatically detected and the appropriate COM port is opened.

Figure 4. Unicleo main window

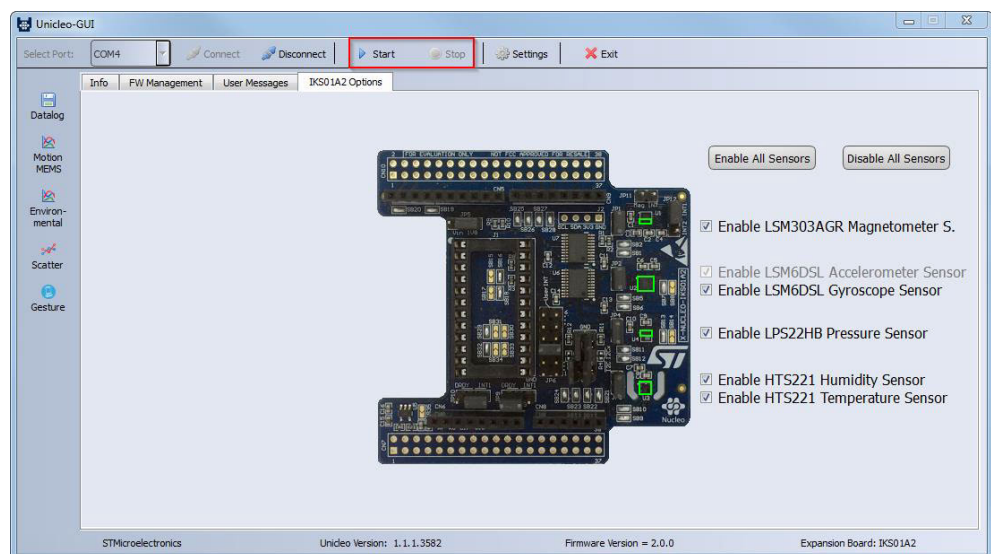


Step 3. Start and stop data streaming by using the appropriate buttons on the vertical tool bar. The data coming from the connected sensor can be viewed in the User Messages tab.

Figure 5. User Messages tab

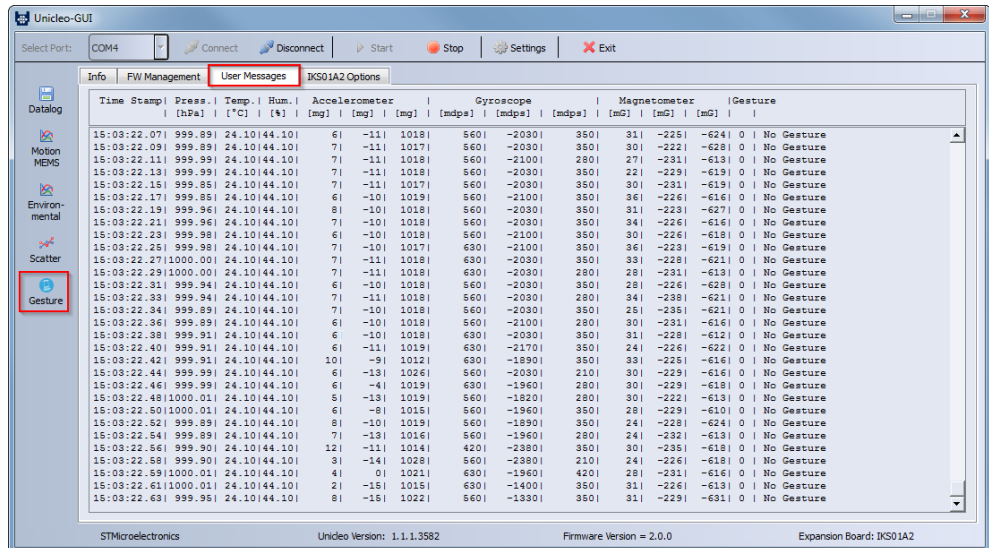

Step 4. Click on the Gesture icon in the vertical tool bar to open the dedicated application window.

Figure 6. Gesture recognition window

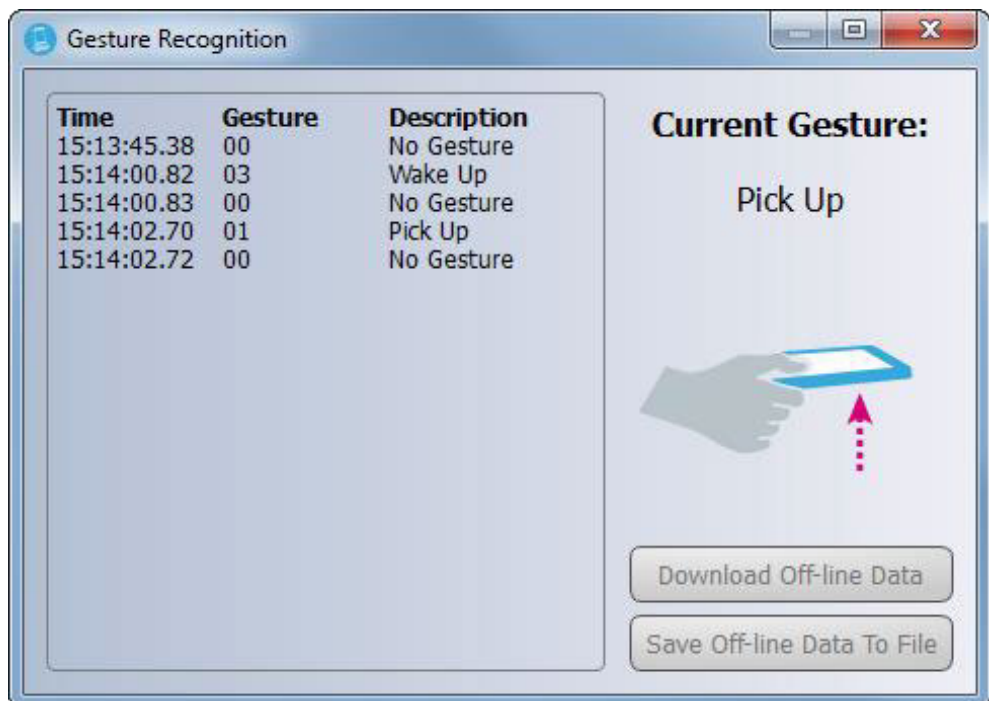


If the board has been working in stand-alone mode and the user wants to retrieve stored data, press Download Off-line Data button to upload the stored activities data to the application. This operation automatically deletes acquired data from microcontroller.

Press the Save Off-line Data to File button to save the uploaded data in a .tsv file.

- Step 5.** Click on the Datalog icon in the vertical tool bar to open the datalog configuration window: you can select which sensor and activity data to save in files. You can start or stop saving by clicking on the corresponding button.

Figure 7. Datalog window

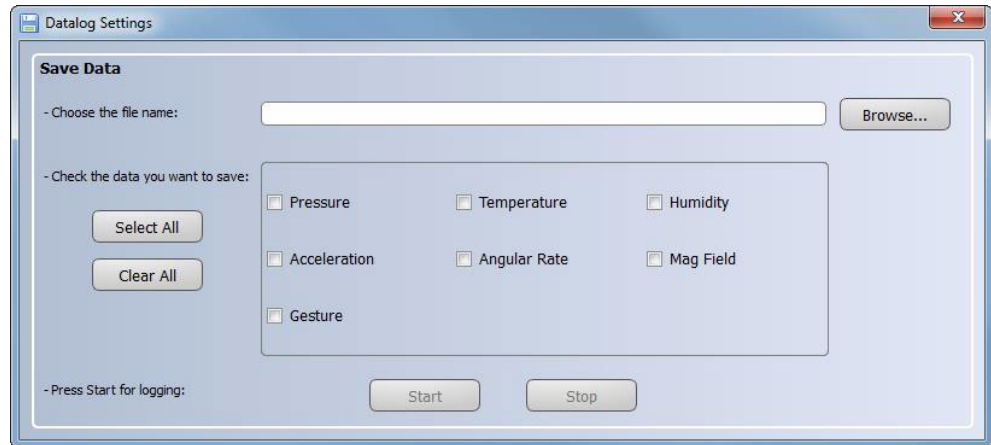

3 References

All of the following resources are freely available on www.st.com.

1. UM1859: Getting started with the X-CUBE-MEMS1 motion MEMS and environmental sensor software expansion for STM32Cube
2. UM1724: STM32 Nucleo-64 board
3. UM2128: Getting started with Unicleo-GUI for motion MEMS and environmental sensor software expansion for STM32Cube

Revision history

Table 5. Document revision history

Date	Version	Changes
06-Jun-2017	1	Initial release.
26-Jan-2018	2	Added references to NUCLEO-L152RE development board and Table 2. Elapsed time (μ s) algorithm.
20-Mar-2018	3	Updated Introduction and Section 2.1 MotionGR overview.
21-Feb-2019	4	Updated Figure 1. Example of sensor orientations, Table 2. Elapsed time (μ s) algorithm and Figure 3. STM32 Nucleo: LEDs, button, jumper. Added X-NUCLEO-IKS01A3 expansion board compatibility information.
24-Mar-2020	5	Updated Introduction, Section 2.2.1 MotionGR library description and Section 2.2.5 Algorithm performance . Added ARM Cortex-M7 architecture compatibility information.

Contents

1	Acronyms and abbreviations	2
2	MotionGR middleware library in X-CUBE-MEMS1 software expansion for STM32Cube	3
2.1	MotionGR overview	3
2.2	MotionGR library	3
2.2.1	MotionGR library description	3
2.2.2	MotionGR APIs	3
2.2.3	API flow chart	5
2.2.4	Demo code	5
2.2.5	Algorithm performance	6
2.3	Sample application	7
2.4	Unicleo-GUI application	8
3	References	11
	Revision history	12

List of tables

Table 1.	List of acronyms	2
Table 2.	Cortex-M4 and Cortex-M3: elapsed time (μ s) algorithm.	6
Table 3.	Cortex-M7: elapsed time (μ s) algorithm.	6
Table 4.	Power supply scheme	7
Table 5.	Document revision history	12

List of figures

Figure 1.	Example of sensor orientations	4
Figure 2.	MotionGR API logic sequence	5
Figure 3.	STM32 Nucleo: LEDs, button, jumper	7
Figure 4.	Unicleo main window	8
Figure 5.	User Messages tab	9
Figure 6.	Gesture recognition window	9
Figure 7.	Datalog window	10

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved