



L9958 evaluation board and graphical user interface (GUI)

1 Overview

This document was intended to explain how to work with L9958 GUI and ST10F276 evaluation board.

Contents

1	Overview	1
2	System description	5
2.1	Introduction	5
2.2	Main components	5
3	General description	6
3.1	Hardware description	6
3.1.1	Main feature of the L9958 evaluation board	6
3.1.2	Battery power supply	8
3.1.3	L9958 H-bridge DC motor driver	8
3.1.4	DC motor connector	9
3.1.5	Jumpers	9
3.1.6	Test points	11
3.1.7	I/O header	11
3.1.8	BOM of L9958 evaluation board	12
3.2	ST10F276 evaluation board configuration	12
3.3	Evaluation GUI description	13
3.3.1	RUN and STOP L9958 GUI	13
3.3.2	Configure L9958 GUI	13
3.3.3	Rx error	20
3.3.4	"Exit" button	20
3.3.5	"Continue diagnosis" switch	20
3.3.6	SPI diagnosis indication	21
3.4	Test results	22
Appendix A		24
A.1	ST10 configuration	24
A.2	Pin out	24
4	Revision history	25

List of tables

Table 1.	Jumpers	9
Table 2.	Test points	11
Table 3.	Bill of material	12
Table 4.	ST10F276 configuration	12
Table 5.	SPI configuration protocol.	13
Table 6.	EN/DI/DIR switch map	17
Table 7.	SPI diagnostic protocol	21
Table 8.	Partly diagnostic testing result	23
Table 9.	ST10F276 pin out for L9958 board	24
Table 10.	Document revision history	25

List of figures

Figure 1.	System connection	5
Figure 2.	System diagram	5
Figure 3.	L9958 evaluation board top view	6
Figure 4.	L9958 evaluation board back view	7
Figure 5.	L9958 evaluation board application circuit	7
Figure 6.	L9958 evaluation board power supply	8
Figure 7.	L9958 H-bridge DC motor driver overview	8
Figure 8.	L9958 evaluation board DC motor connector	9
Figure 9.	L9958 evaluation board jumpers	10
Figure 10.	L9958 evaluation board test point.	11
Figure 11.	L9958 GUI general view and the default value.	13
Figure 12.	SPI control area	16
Figure 13.	SPI control data display	16
Figure 14.	Motor control command field	16
Figure 15.	PWM duty	17
Figure 16.	PWM frequency control	17
Figure 17.	Reverse direction of motor control	18
Figure 18.	Forward direction of motor control	18
Figure 19.	Freewheeling direction of motor control	19
Figure 20.	Function configure field.	19
Figure 21.	COM number map on PC	20
Figure 22.	SPI diagnostic information	21
Figure 23.	PWM settings for motor control	22
Figure 24.	The wave form of motor forward control	22
Figure 25.	The wave form of motor reverse control	22

2 System description

2.1 Introduction

The L9958 evaluation board is a standalone evaluation board for the L9958 devices.

The L9958 is an SPI controlled H-bridge, designed for the control of DC and stepper motors in safety critical applications and under extreme environmental

2.2 Main components

- L9958 device with 34x4 connectors can be connected to the MCU evaluation board
- Main GUI

Figure 1. System connection


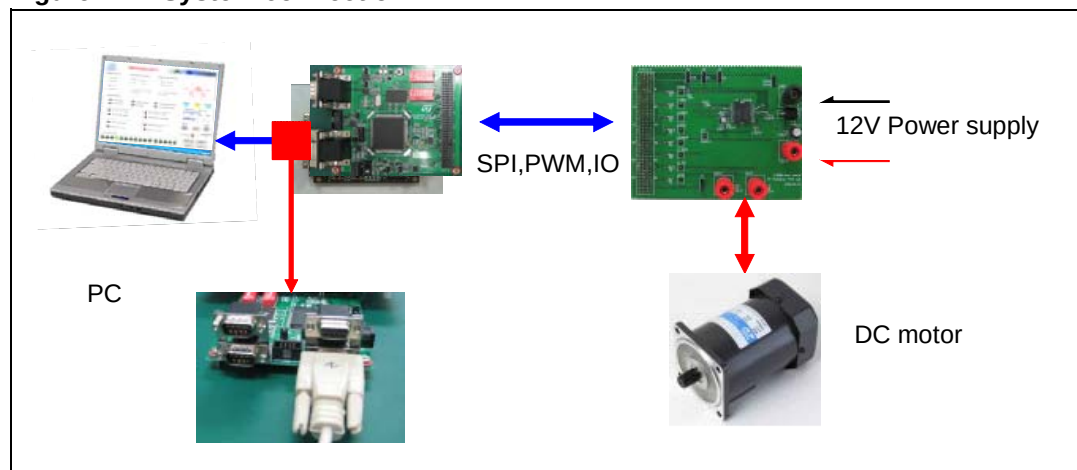


Figure 2. System diagram

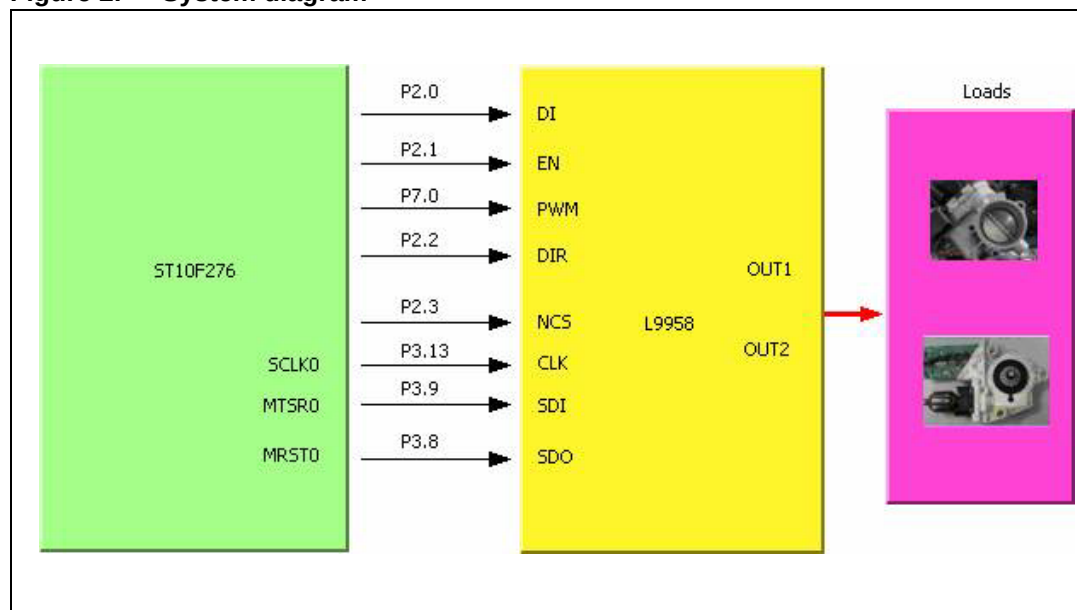

3 General description

3.1 Hardware description

The L9958 evaluation board consists of a transistor provide ISO pulse protection by clamping action, L9958 H-bridge IC for DC motor control, IO connector for MCU connection (compatible with ST10 MCU).

Schematics of the evaluation board can also be referred to for more details on the jumper configurations.

3.1.1 Main feature of the L9958 evaluation board

Figure 3. L9958 evaluation board top view

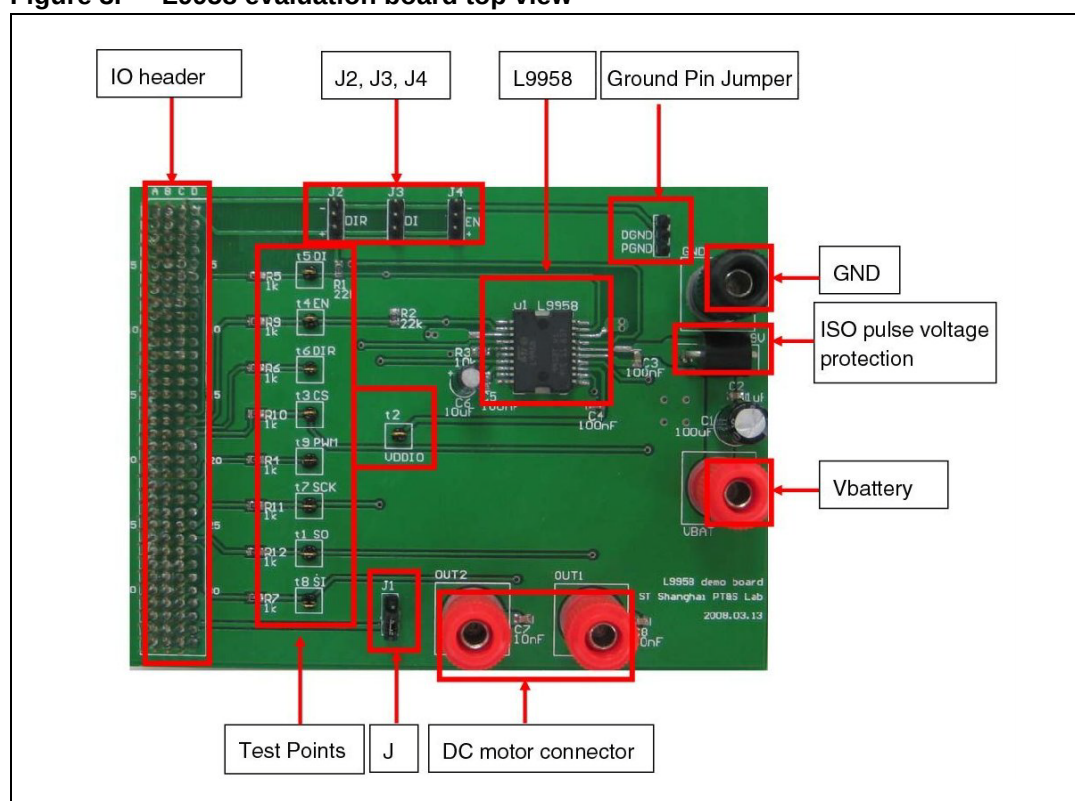


Figure 4. L9958 evaluation board back view


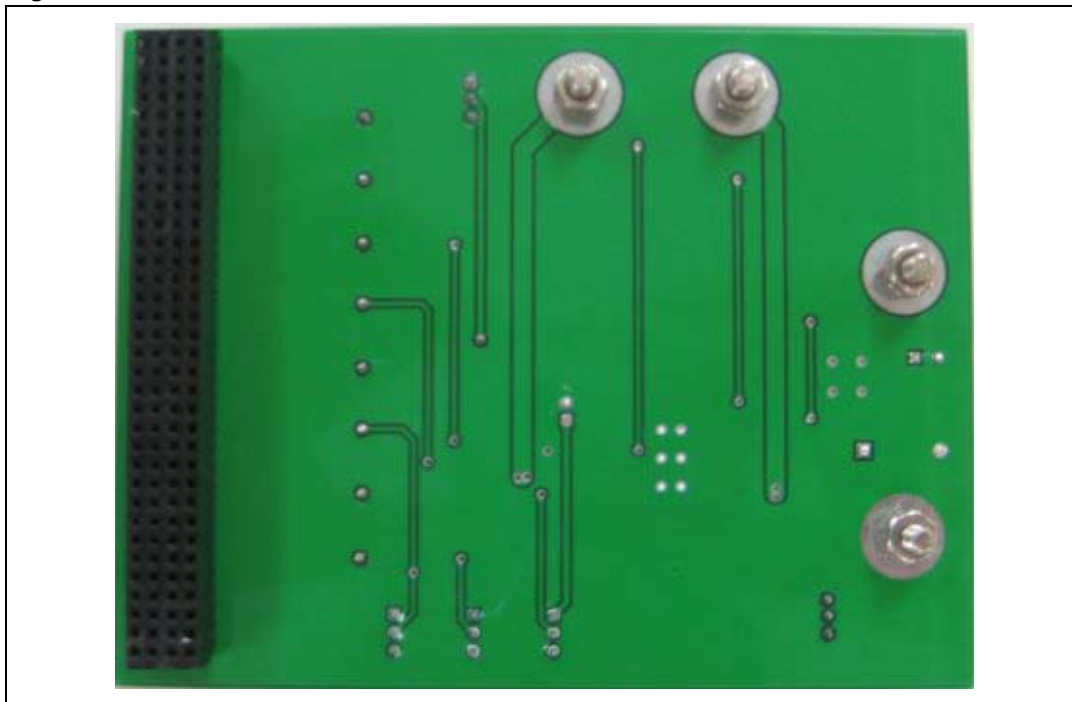



Figure 5. L9958 evaluation board application circuit

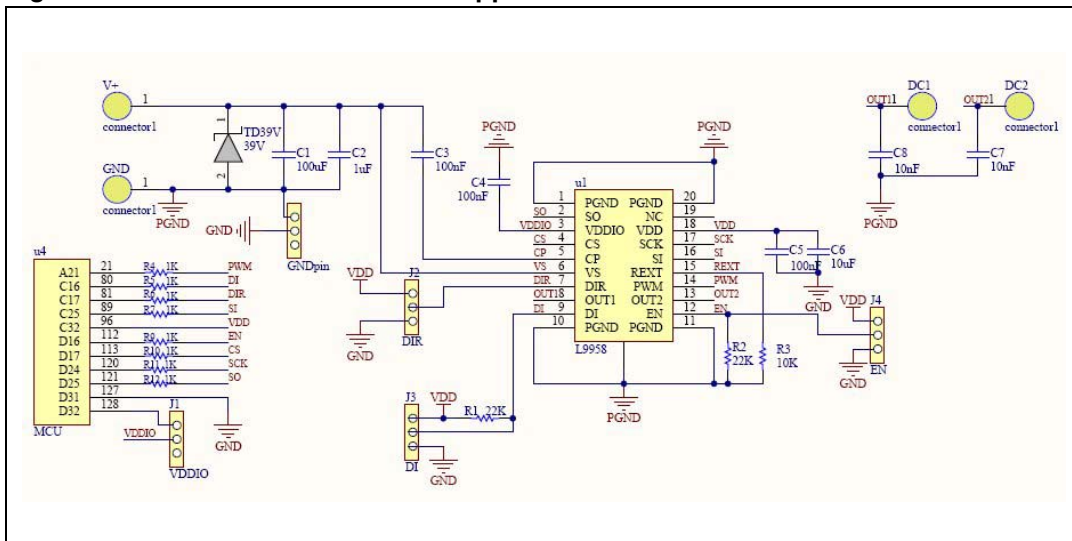

3.1.2 Battery power supply

There is one battery supply connectors on the board, with a trafil diode for ISO pulse voltage protection (39 V). C1, C2 is designed for power supply filter purpose and C3 is the charge pump capacitor. See below the schematic of this part.

Figure 6. L9958 evaluation board power supply

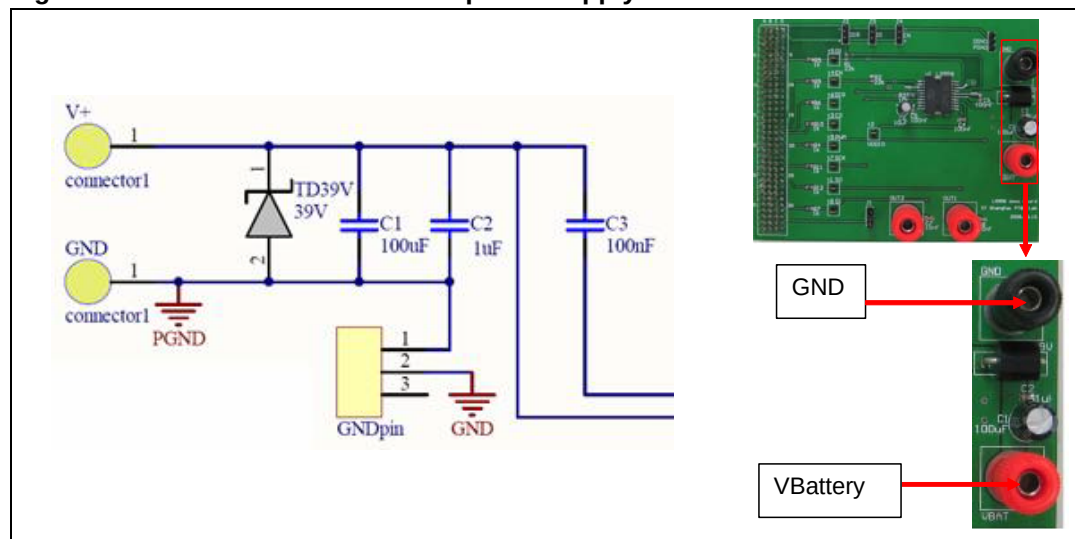


3.1.3 L9958 H-bridge DC motor driver

There is L9958 H-bridge DC motor driver on the board, can achieve PWM control, SPI diagnostic, DC motor drive functions.

C4,C5,C6 is designed as decoupling capacitor for VDDIO and VDD.


Figure 7. L9958 H-bridge DC motor driver overview

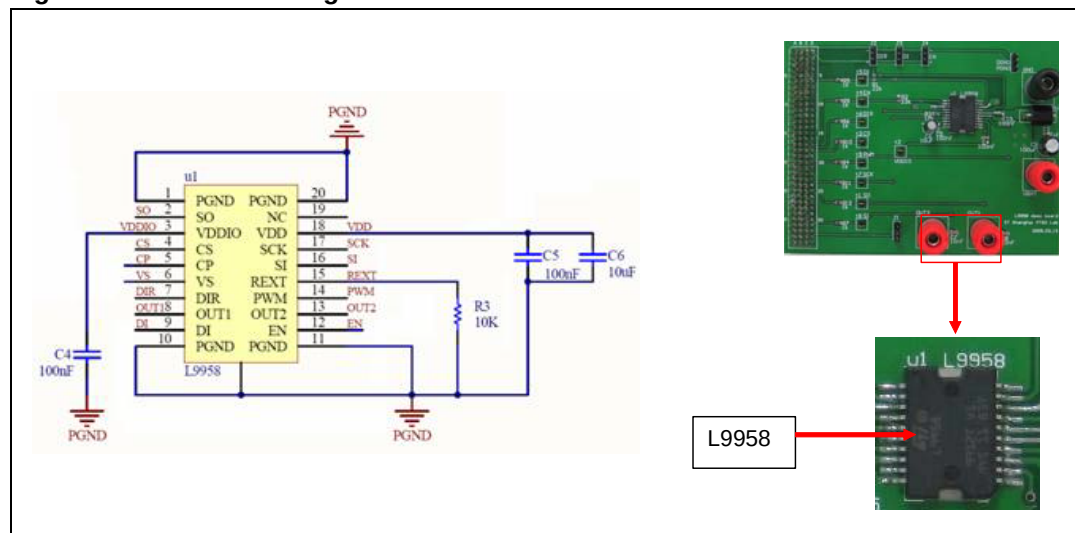

3.1.4 DC motor connector

There are two connectors on the board can be directly connect to DC motor, C7, C8 is designed for ESD purpose for DC motor drive.
See below the schematic of this part

Figure 8. L9958 evaluation board DC motor connector

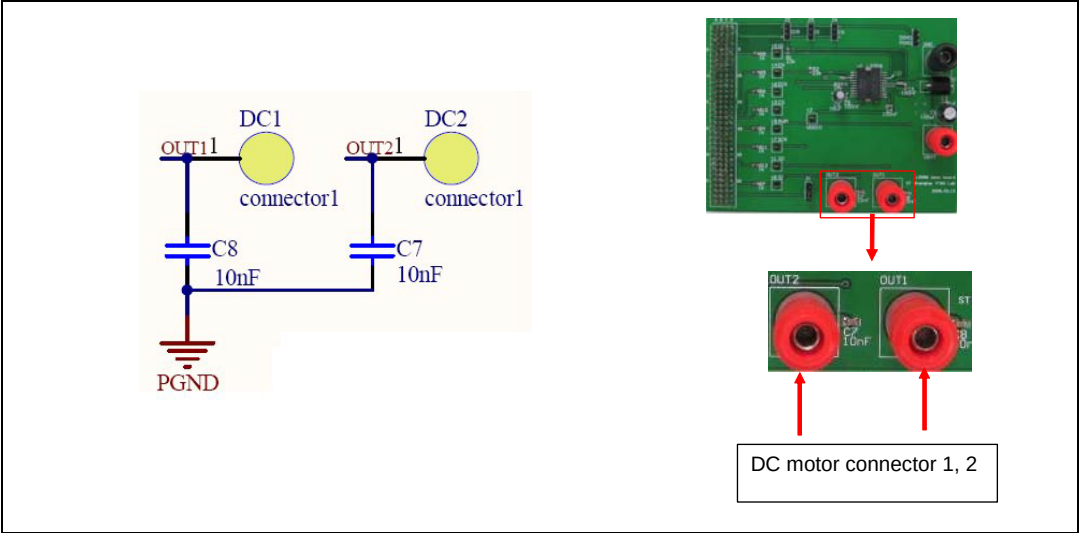

3.1.5 Jumpers

There are 5 jumpers on the board for VDDIO connection, Power ground, Digital ground configuration as well as DIR,DI,EN connection for L9958 input digital signal


Table 1. Jumpers

Type		Description
J1		Connect L9958 VDDIO to D32 (ST10 5V)
J2		DIR is connected to 5V
		DIR is connected to GND
		DIR is controlled by C17
J3		DI is connected to 5V
		DI is connected to GND
		DI is controlled by C16

Table 1. Jumpers (continued)

Type		Description
J4		EN is connected to 5V
		EN is connected to GND
		EN is controlled by D16
GNDpin		GND is connected to PGND
		GND and PGND not connected

Figure 9. L9958 evaluation board jumpers

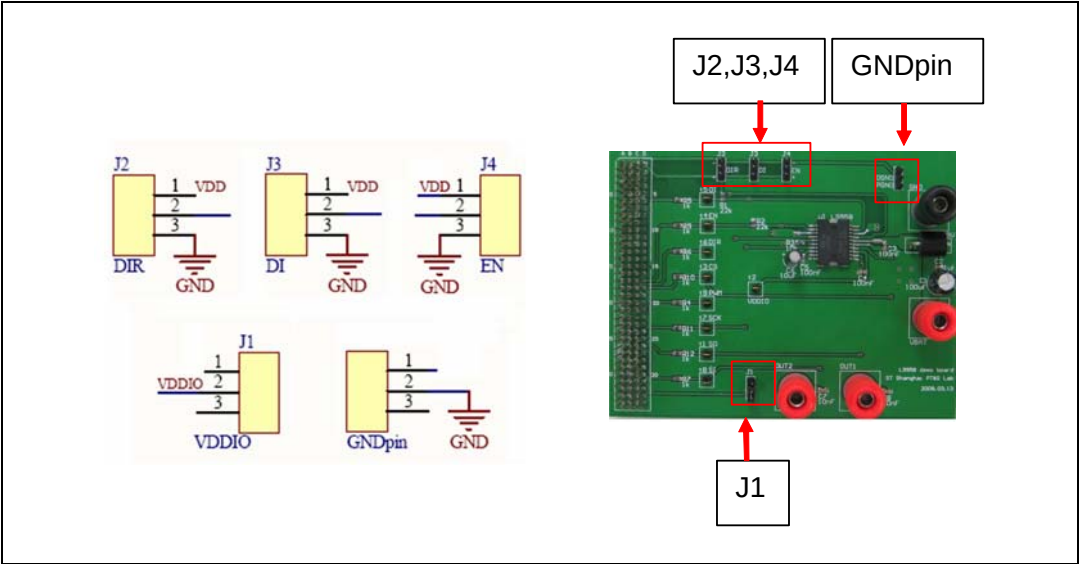


3.1.6 Test points

There are 9 test points on the board.

Table 2. Test points

Test points	Definition	Description
t1	SO	L9958 SPI Dout
t2	VDDIO	L9958 VDDIO
t3	CS	L9958 SPI CS signal
t4	EN,	L9958 enable signal
t5	DI	L9958 DI signal
t6	DIR	L9958 H-bridge direction control
t7	SCK	L9958 SPI clock signal
t8	SI,	L9958 SPI Din
t9	PWM	L9958 PWM input signal for H-bridge control

Figure 10. L9958 evaluation board test point

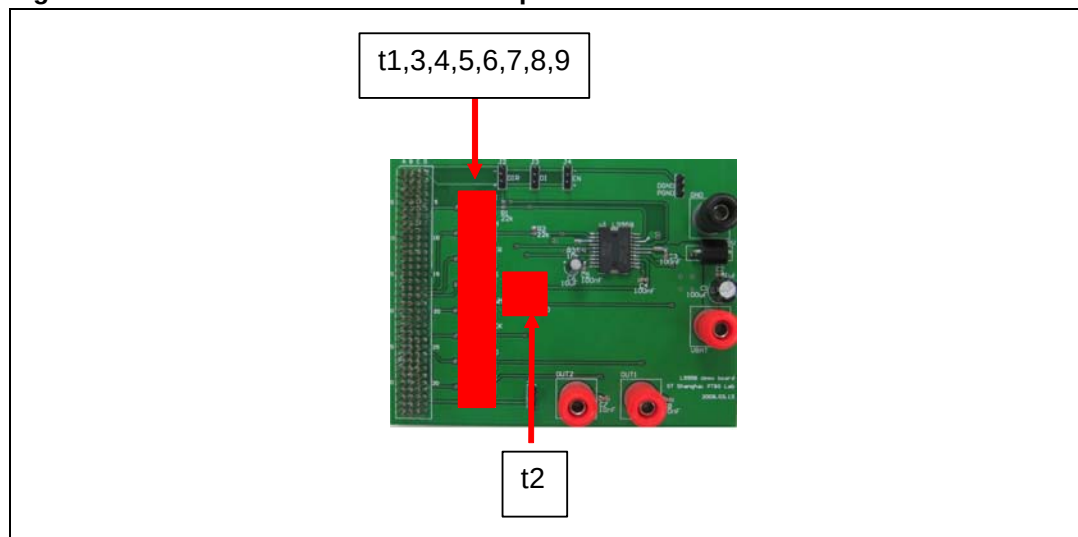

3.1.7 I/O header

The 34×4 I/O header allows access to control or diagnostic I/O from the MCU.

Below is the I/O header pin mapping, see appendix A.

3.1.8 BOM of L9958 evaluation board

Table 3. Bill of material

Comment	Description	Designator	Footprint	Quantity
100μF 50V	100uF	C1	Cap (50V 100μF)	1
1μF	Capacitor (Semiconductor SIM Model)	C2	C0805	1
100nF	Capacitor (Semiconductor SIM Model)	C3, C4, C5	C0805	3
10μF	Capacitor	C6	RAD-0.1	1
10nF	Capacitor (Semiconductor SIM Model)	C7, C8	C0805	2
connector1	-	DC1, DC2, GND, V+	Connector1	4
Jpin	DI, DIR, EN, VDDIO	GNDpin, J1, J2, J3, J4	Jpin	5
22k	Semiconductor resistor	R1, R2	2012[0805]	2
10k	Semiconductor resistor	R3	2012[0805]	1
1k	Semiconductor resistor	R4, R5, R6, R7, R9, R10, R11, R12	2012[0805]	8
testpoint	-	t1, t2, t3, t4, t5, t6, t7, t8, t9	testpoint	9
39V	-	TD39V	transil diode	1
L9958	-	u1	PowerSO20	1
connector2	X1	u4	HDR34X4	1

3.2 ST10F276 evaluation board configuration

The ST10F276 is configured as 64 MHz CPU clock, and the configuration is shown in following table:

Table 4. ST10F276 configuration


B1	B2	B3	B4	B5	B6	B7	B8
S3 configuration							
off	off	off	off	off	off	on	off
S4 configuration							
on	off	on	on	on	off	on	off

Connect PC COM port to ST10 UART0, PC COM port can be configured by GUI.

3.3 Evaluation GUI description

The L9958 GUI consists of five fields, three control fields: SPI menu select, motor control command field, function configuration field; two indication field: SPI diagnosis indicator and EN, DI, DIR indicator.

Figure 11. L9958 GUI general view and the default value

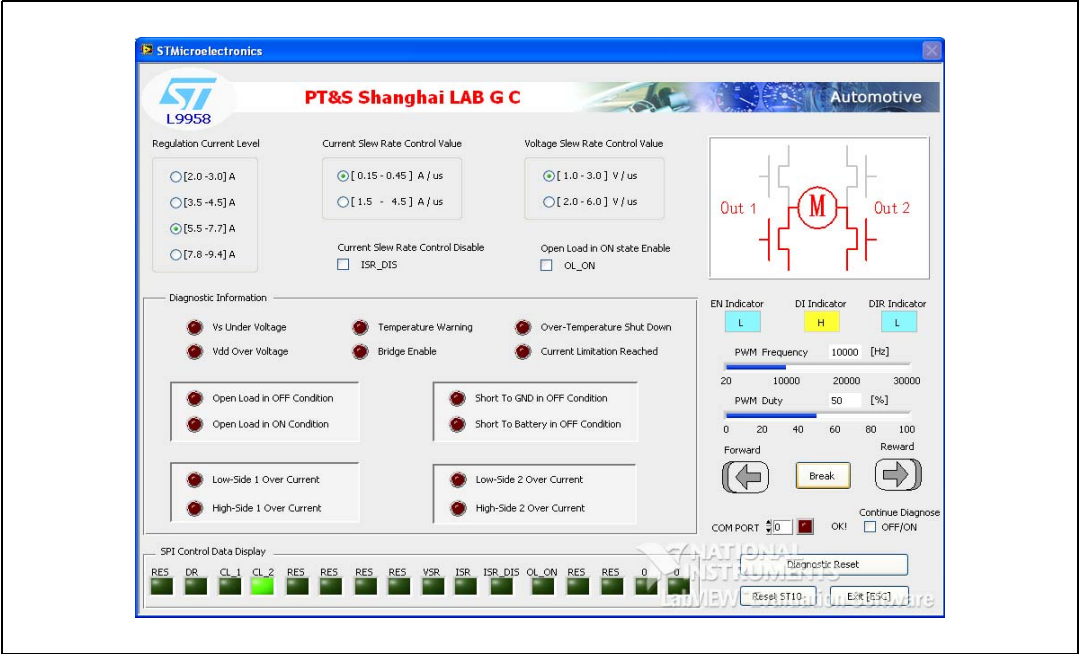

3.3.1 RUN and STOP L9958 GUI

The L9958 GUI was automatically running when opened. At this time, the default value was shown as [Figure 11](#).

User can stop and exit the GUI via click “Exit” key:  or press “ESC” key on keypad.

3.3.2 Configure L9958 GUI

SPI menu select field

This field was used to select SPI command. The SPI command was sent to L9958 by ST10 via SPI. The SPI configuration protocol was shown as below, more details, please refer to L9958.

Table 5. SPI configuration protocol

Bit	Name	Description	Config. value after reset
0 - LSB	RES	Reserved	—
1	DR	Diagnostic Reset Bit	0
2	CL_1	Bit1 for Regulation Current Level	0

Table 5. SPI configuration protocol (continued)

Bit	Name	Description	Config. value after reset
3	CL_2	Bit2 for Regulation Current Level	1
4	RES	Reserved	—
5	RES	Reserved	—
6	RES	Reserved	—
7	RES	Reserved	—
8	VSR	Voltage slew rate control value	0
9	ISR	Current slew rate control value	0
10	ISR_DIS	Current slew rate control disable	0
11	OL_ON	Open load in ON state enable	0
12	RES	Reserved	—
13	RES	Reserved	—
14	0	"0" to be written	—
15-MSB	0	"0" to be written	—

Diagnostic reset bit

Description: Diagnostic Reset bit, more details, please refers to L9958 datasheet.

Value: Diagnostic Reset Disable → Clicked → 1
Diagnostic Reset Enable → Un-Clicked → 0

Default: Diagnostic Reset Enable → Un-Clicked → 0

SPI command Bit: b1

Open load in ON state enable

Description: Open load in ON state Enable bit, more details, please refer to L9958 datasheet.

Value: Open load in ON state Enable → Clicked → 1
Open load in on state Disable → Un-Clicked → 0

Default: → Open load in ON state Disable → Un-Clicked → 0

SPI-DIN Bit: b11

Current slew rate control disable

Description: Current Slew Rate Control Disable bit, more details, please refers to L9958 datasheet.

Value: Current Slew Rate Control Disable → Clicked → 1
Current Slew Rate Control Enable → Un-Clicked → 0

Default: Current Slew Rate Control Enable → Un-Clicked → 0

SPI-DIN Bit: b10

ISR

Description: Current Slew Rate Control Value bit, more details, please refers to L9958 datasheet.

Value: [0.15 - 0.45] A/μs → ISR=1
[1.5 - 4.5] A/μs → ISR=0

Default: [1.5 - 4.5] A/μs → ISR= 0

SPI-DIN Bit: b9

VSR

Description: Voltage Slew Rate Control Value bit, more details, please refer to L9958 datasheet.

Value: [1 - 3] V/μs → VSR=1
[2 - 6] V/μs → VSR=0

Default: [2 - 6] V/μs → VSR=0

SPI-DIN Bit: b8

Current regulation level

Description: Current Regulation Level bit, more details, please refers to L9958 Datasheet.

Value: [2.0 - 3.0] A → CL_1=0, CL_2=0
[3.5 - 4.5] A → CL_1=1, CL_2=0
[5.5 - 7.7] A → CL_1=0, CL_2=1
[7.8 - 9.4] A → CL_1=1, CL_2=1

Default: [2.0 - 3.0] A → CL_1=0, CL_2=0

SPI-DIN Bit: b2 b3

SPI IN display

Description: Corresponding SPI IN command was displayed

Value: b0 b1 b2 b3 b4 b5 b6 b7 b8 b9 b10 b11 b12 b13 b14 b15

Reset Value: 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0

Note: bit 0, bit4-bit7, bit12-bit15 was fixed as '0' according to L9958 SPI protocol shown as Figure 5, more details, please refer to L9958 Datasheet.

Configuration example

Click the button means set the bit. Unclick the button means reset the bit.

Figure 12. SPI control area

Regulation Current Level

☐ [2.0 -3.0] A

☐ [3.5 -4.5] A

☒ [5.5 -7.7] A

☐ [7.8 -9.4] A

Current Slew Rate Control Value

☒ [0.15 - 0.45] A / us

☐ [1.5 - 4.5] A / us

Current Slew Rate Control Disable

☐ ISR_DIS

Voltage Slew Rate Control Value

☒ [1.0 - 3.0] V / us

☐ [2.0 - 6.0] V / us

Open Load in ON state Enable

☐ OL_ON

After configured SPI menu, the configured SPI command will be displayed at "SPI Control Data Display" area and automatically sent to L9958.

Figure 13. SPI control data display

SPI Control Data Display

RES

DR

CL_1

CL_2

RES

RES

RES

RES

VSR

ISR

ISR_DIS

OL_ON

RES

RES

0

0

More information about SPI configuration protocol, please refer to L9958 datasheet.

Motor control command field

This field was purposed for controlling motor command: PWM duty-cycle, PWM Frequency, motor direction control and break control.

Figure 14. Motor control command field

PWM Frequency

10000 [Hz]

20 10000 20000 30000

PWM Duty

50 [%]

0 20 40 60 80 100

Forward

Reverse

Break

Disable/EN switch

The EN and DI input signal of L9958 to make the bridge tri-state or on-state is controlled by

Forward

 key,

Reverse

 key and

Break

 key.

When toggle these keys, DIR, EN and DI is automatically controlled by PC software, and the will display the status of EN, DIR, DI pins.

EN Indicator

DI Indicator

DIR Indicator

L

H

L

The control logic is shown in [Table 2](#): more information, please refer to L9958 datasheet.


Table 6. EN/DI/DIR switch map

Switch	EN	DI	DIR	Bit "ACT"	Bridge status
Forward	EN Indicator H	DI Indicator L	DIR Indicator H	 Bridge Enable "1"	On-state
Break	EN Indicator L	DI Indicator H	DIR Indicator H	 Bridge Enable "0"	tri-state
Reverse	EN Indicator H	DI Indicator L	DIR Indicator L	 Bridge Enable "1"	On-state
Break	EN Indicator L	DI Indicator H	DIR Indicator L	 Bridge Enable "0"	tri-state

PWM duty-cycle and frequency control


- PWM Duty-cycle control
Range: [0, 100] %
Step: 1
Default: 50 %

Figure 15. PWM duty

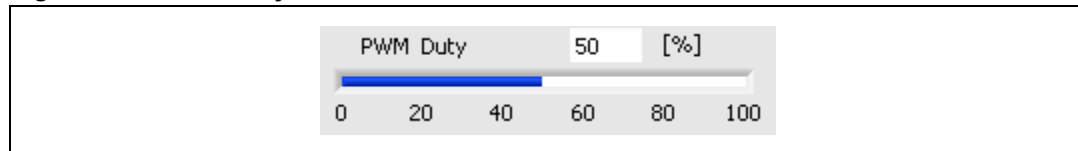

- PWM frequency control
Range: [20, 30000] Hz
Step: 1
Default: 10000Hz

Figure 16. PWM frequency control

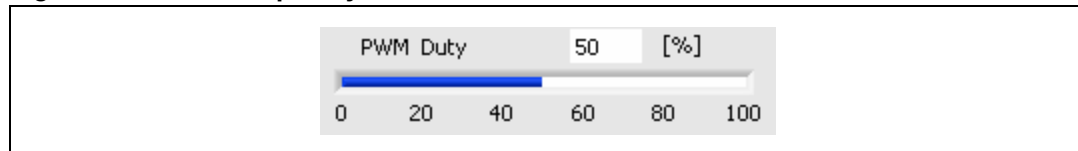


To adjust PWM control bars will change the duty-cycle and frequency of L9958's PWM input signal. But if the motor was freewheeling, the action clicking the control roll didn't change the current status, PWM duty-cycle unchanged.

Reverse key

The key only works at CLICKED (Rising edge), that is to say the un-clicked action (fall edge) didn't change the direction status. When the "Reverse Key" was clicked, the DIR input signal of L9958 becomes LOW.

From the GUI side, when "Reverse Key" was clicked, the "BREAK" or "Forward Key" was reset, and the motor display field was shown as below:

Figure 17. Reverse direction of motor control

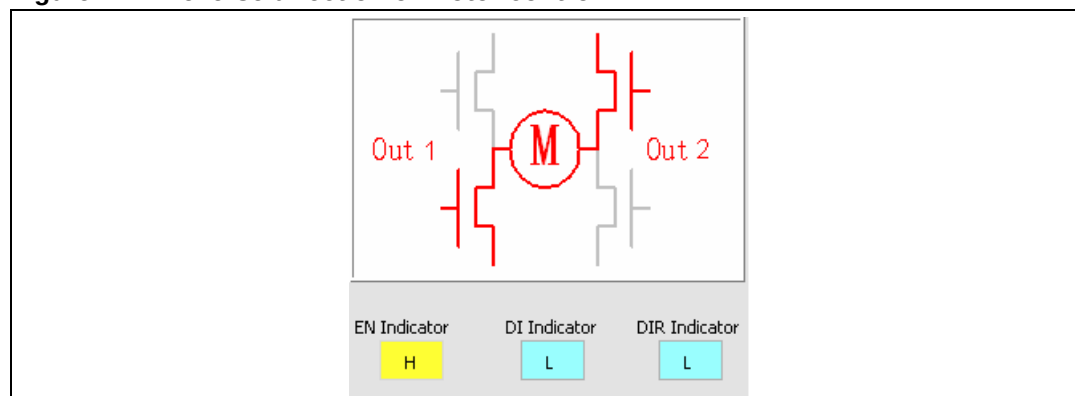


Forward key

The key only works at CLICKED (Rising edge), that is to say the un-clicked action (fall edge) didn't change the direction status. When the "Forward Key" was clicked, the DIR input signal of L9958 becomes HIGH.

From the GUI side, when "Forward Key" was clicked, the "BREAK" or "Reverse Key" was reset, and the motor display field was shown as below:

Figure 18. Forward direction of motor control

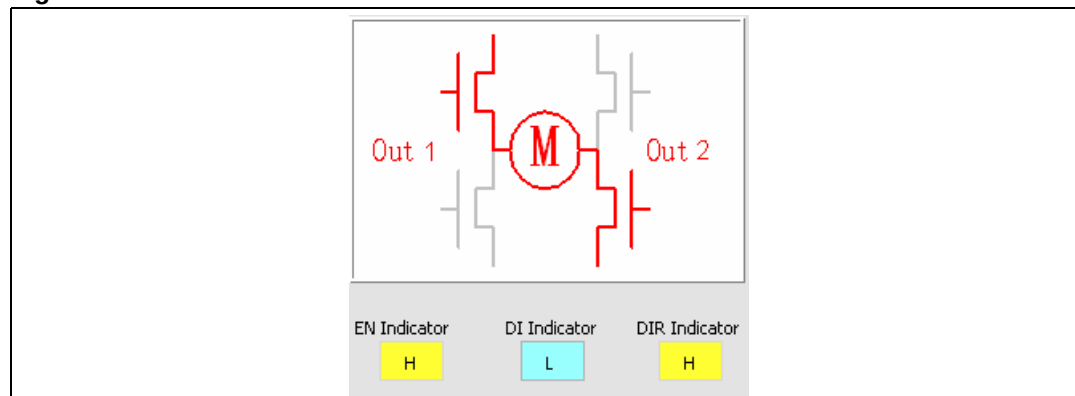


BREAK key


The key only works at CLICKED (Rising edge), that is to say the un-clicked action (fall edge) didn't change the direction status. When the "BREAK" was clicked, the duty-cycle of L9958 PWM was 0%, PWM=0, the status of bridge was freewheeling Low (as [Table 2](#) above).

From the GUI side, when "BREAK" was clicked, the "Reverse Key" or "Forward Key" was reset, and the motor display field was shown as below:


Figure 19. Freewheeling direction of motor control

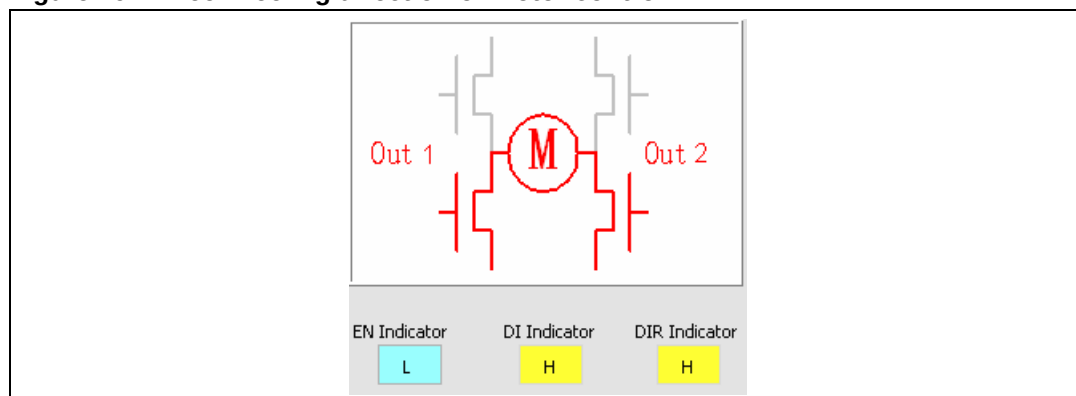

"Diagnostic reset" button

The action clicked the "Diagnostic Reset" button () will only reset SPI Menu field and SPI Diagnosis Indication field to the default value shown as Figure 3.


"Reset ST10" button

The action clicked the "Reset ST10" button () will soft reset ST10 and configure ST10 DIO, SPI and CC.

Function configuration field


The function configuration field consists of four parts: Port Configuration, Rx Error, Exit button, Continue Diagnosis switch, as shown below:

Figure 20. Function configure field

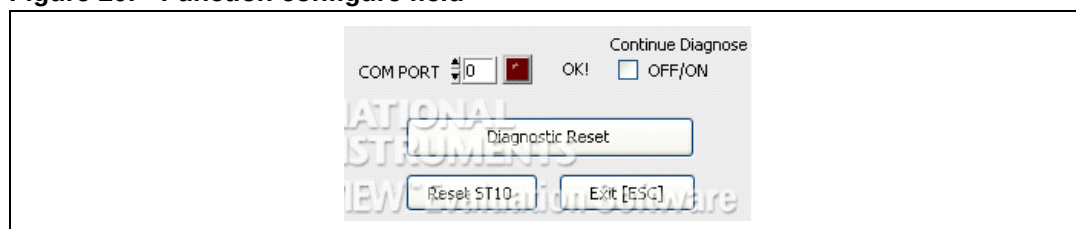

Port configuration


Com port (COM PORT ) can be changed by user, according the used COM port number of PC.

After modified the com port number, user must click the reset key  to reset and configure the ST10 evaluation board.

Port number: (COM Number - 1)

Baud rate: 38400 (default)

Figure 21. COM number map on PC

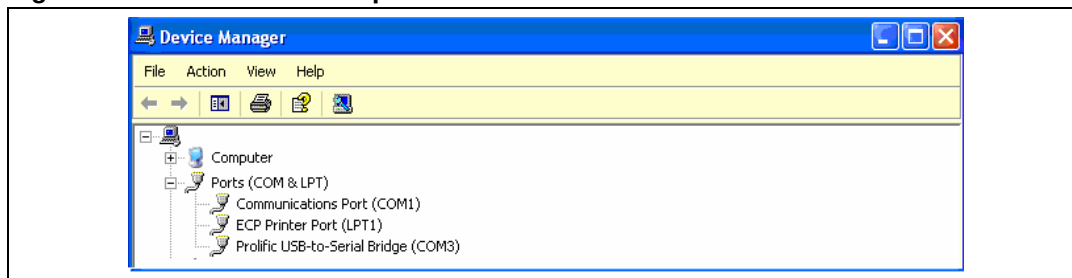

Example: For COM1: "0" port number should be selected (COM PORT )

For COM3: "2" port number should be selected (COM PORT )

If the port configuration failed, when select  , COM PORT   ERROR! happened:

Notes: when this error appeared, please do below actions:


- Configure the Port number correctly
- Clicked the "Reset ST10" button to reset the L9958 GUI and ST10 configuration

3.3.3 Rx error

The Rx error turned red (COM PORT   ERROR!) indicate below receive error:

- Receive timeout
- Receive error
- Received frame incorrect

3.3.4 "Exit" button

The "Exit" button () was only used to stop and exit the L9958 GUI.

3.3.5 "Continue diagnosis" switch

If the "Continue Diagnosis" was clicked (), the L9958 GUI enters automatic diagnosis mode, the current SPI menu configuration will be sent to L9958 continuously to do the continuous diagnosis. When continuous diagnosis was selected, "SPI send" also works.


3.3.6 SPI diagnosis indication

This field will indicate the diagnosis status. SPI diagnosis word will displayed at SPI Diagnosis Indication field. The diagnostic protocol was referred below:

Table 7. SPI diagnostic protocol

Bit	Name	Description	Status after reset
0-LSB	OL_OFF	Open load in OFF condition	0
1	OL_ON	Open load in ON condition	0
2	VS_UV	Vs undervoltage	0
3	VDD_OV	Vdd overvoltage	0
4	ILIM	Current limitation reached	0
5	TWARN	Temperature warning	0
6	TSD	Over-temperature shutdown	0
7	ACT	Bridge enable	1
8	OC_LS1	Over-current on low side 1	0
9	OC_LS2	Over-current on low side 2	0
10	OC_HS1	Over-current on high side 1	0
11	OC_HS2	Over-current on high side 2	0
12	Null	Not used	–
13	Null	Not used	–
14	SGND_OFF	Short to GND in OFF condition	0
15-MSB	SBAT_OFF	Short to battery in OFF condition	0

Figure 22. SPI diagnostic information

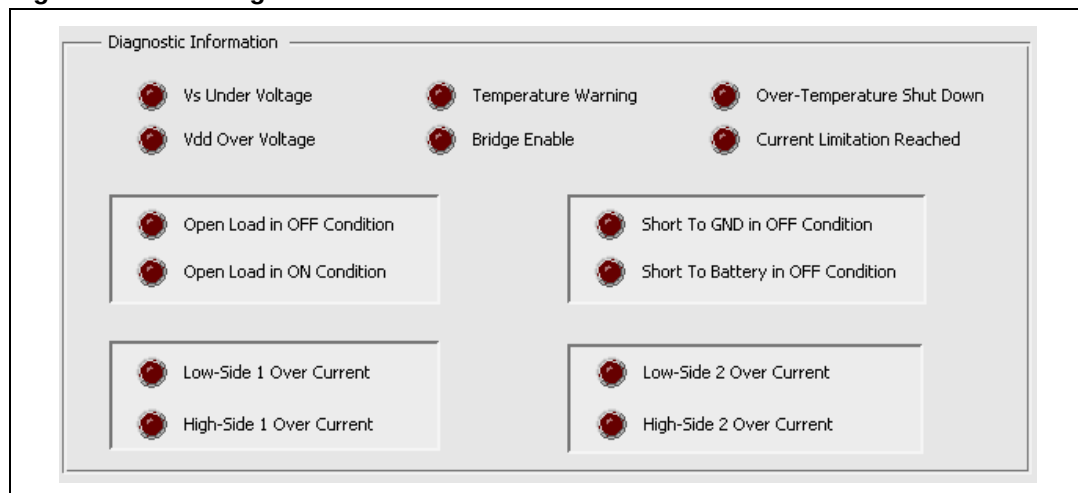


For more diagnostic information, Please refer to L9958 datasheet in detail.

3.4 Test results


PWM control signal settings:

Figure 23. PWM settings for motor control

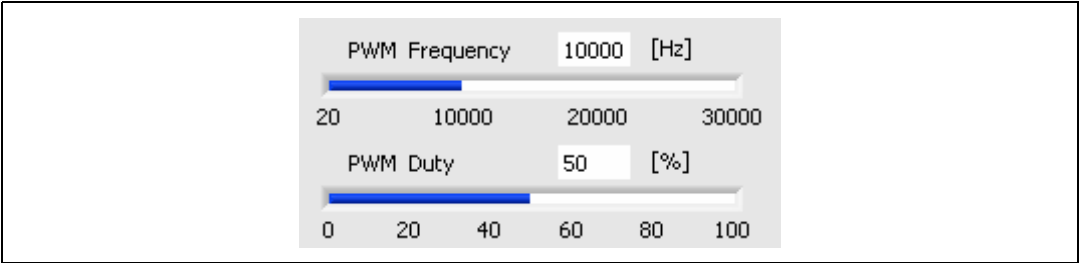

- Motor Control → Forward Control:

Figure 24. The wave form of motor forward control

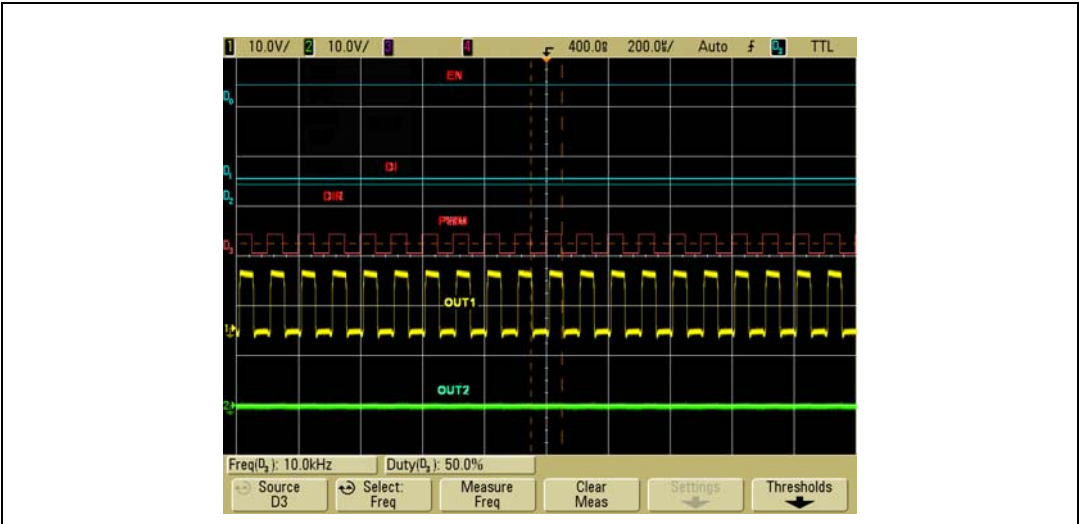

- Motor Control → Reverse Control:

Figure 25. The wave form of motor reverse control

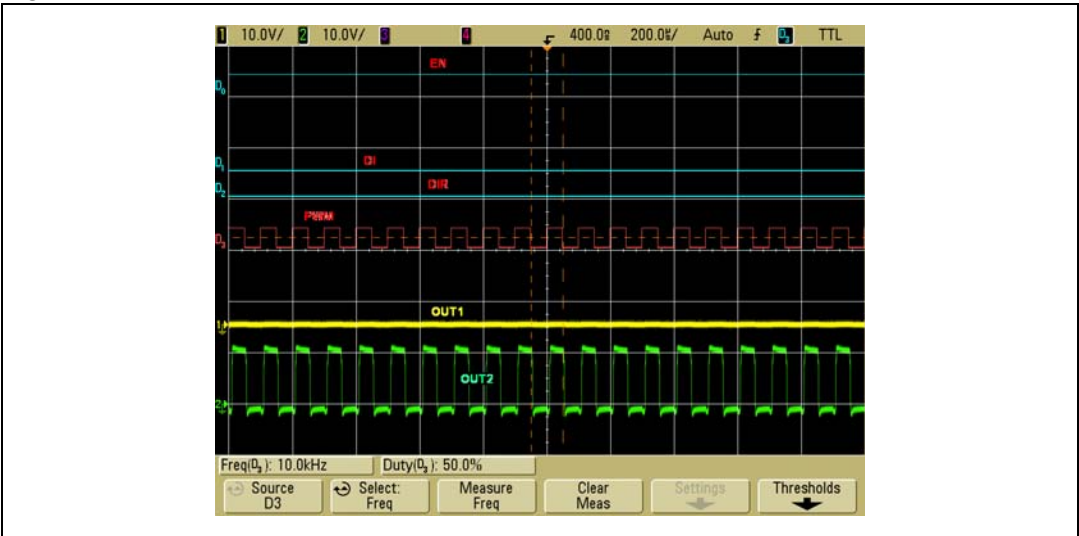


Table 8. Partly diagnostic testing result

Item	Operation	SPI status register bit	Diagnostic information	Result
Open Load In OFF Condition	Open load	BIT 0	 Open Load in OFF Condition	pass
Open Load In ON Condition	Open Load in ON state Enable  OL_ON & turn on the OUT1,2	BIT 1	 Open Load in ON Condition	pass
Vs Under Voltage	Vbat<3.6V	BIT 2	 Vs Under Voltage	pass
Current Limitation Reached	Short circuit	BIT 4	 Current Limitation Reached	pass
Bridge Enable	Turn on OUT1,2	BIT 7	 Bridge Enable	pass
High-Side 1 Over Current	DIR=1,EN=1,DI=0,PWM=1 CONNECT OUT1 to GND	BIT9	 High-Side 1 Over Current	pass
Low-Side 2 Over Current	DIR=1,EN=1,DI=0,PWM=1 CONNECT OUT2 to Vbatt	BIT8	 Low-Side 2 Over Current	pass
High-Side 2 Over Current	DIR=0,EN=1,DI=0,PWM=1 CONNECT OUT2 to GND	BIT11	 High-Side 2 Over Current	pass
Low-Side 1 Over Current	DIR=0,EN=1,DI=0,PWM=1 CONNECT OUT1 to Vbatt	BIT10	 Low-Side 1 Over Current	pass
Short To GND in OFF Condition	Connect OUT1 to GND	BIT14	 Short To GND in OFF Condition	pass
	Connect OUT2 to GND			
Short To Battery in OFF Condition	Connect OUT1 to Vbat	BIT15	 Short To Battery in OFF Condition	pass
	Connect OUT2 to Vbat			

Appendix A

A.1 ST10 configuration

CPU Frequency: 64 MHz

1. ASC

For ST10F276, ASC0 can be initialized;

Baud Rate: 38400, 8 bit data asynchronous, 1 stop bit,

2. SSC

Frequency: 1 MHz, 16 bit Data-Width, LSB first, Low level at idle, transmit at rising edge

/CS line: 2.3

A.2 Pin out

Pin connection between ST10F27x evaluation board and L9958 demonstration board.

Table 9. ST10F276 pin out for L9958 board

Function	Name	GPIO	PIN	F27x_SH ⁽¹⁾
EN/DI	DI	P2.0	Pin 47 - GPIO	C17
	EN	P2.1	Pin 48 – GPIO	D17
Direction control	DIR	P2.2	Pin 49 – GPIO	C18
	PWM	P7.0	Pin 19 – POUT0	A22
SPI signals	/CS	P2.3	Pin 50 – GPIO	D18
	SCK	P3.13	Pin 80- SCLK0	D25
	SI	P3.9	Pin 76-MTSR0	C26
	SO	P3.8	Pin 75-MRST0	D26
UART signals	TxD1	P8.7	Pin 16-TxD1	B21
	RxD1	P8.6	Pin 15-RxD1	A21
	TxD0	P3.10	Pin 77-TxD0	C11
	RxD0	P3.11	Pin 78-RxD0	D11

1. F276_SH is the board made by ShangHai BPT&S Lab APG China (ST10F27X EVA v1.0).

4 Revision history

Table 10. Document revision history

Date	Revision	Changes
28-Jul-2009	1	Initial release.
19-Sep-2013	2	Updated disclaimer.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com