


Getting started with the high power stepper motor driver expansion board based on powerSTEP01 for STM32 Nucleo

Introduction

The **X-NUCLEO-IHM03A1** is a high power stepper motor driver expansion board based on the powerSTEP01. It provides an affordable and easy-to-use solution for driving high power bipolar stepper motors in your STM32 Nucleo project. The fully digital motion control through speed profile generation, dynamic positioning feedback and a complete suite of protection features offer high levels of performance and robustness. The **X-NUCLEO-IHM03A1** is compatible with the Arduino UNO R3 connector and supports the addition of other boards which can be stacked to drive up to three stepper motors with a single STM32 Nucleo board.

Figure 1. X-NUCLEO-IHM03A1 expansion board for STM32 Nucleo

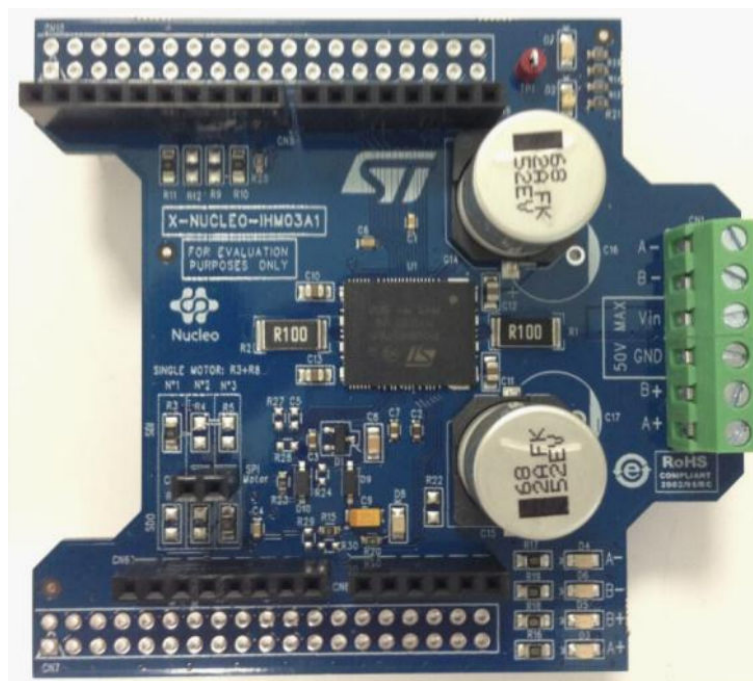

Notice: For dedicated assistance, submit a request through our online support portal at www.st.com/support.

1 Getting started

The X-NUCLEO-IHM03A1 expansion board is a high power stepper motor driver covering a wide range of applications. In particular, the maximum ratings of the board are the following.

- Power stage supply voltage (VS) from 10.5 V to 50 V
- Motor phase current up to 10 A r.m.s.

Follow this sequence to start your project with the board:


1. Check the jumper position based on your configuration (see [Section 2: Hardware description and configuration](#)).
2. Plug the board to the STM32 Nucleo board through Arduino UNO R3 for the X-NUCLEO-IHM03A1.
3. Supply the board through the input 1 (VS) and 2 (ground) of the connector CN1. The power OK (green) and fault (red) LEDs will turn on.
4. Develop your application using the examples provided with the firmware library, X-CUBE-SPN3, high power stepper motor driver software expansion for STM32Cube. Further support material is available on the powerSTEP01 (www.st.com/powerstep) and STM32 Nucleo web pages (www.st.com/stm32nucleo).

Note: Up to three expansion boards can be stacked on the same STM32 Nucleo board as described in [Section 2.2: Multi-motor configuration](#).

2 Hardware description and configuration

Figure 2. Jumper and connector positions shows the position of the connectors and the configuration jumpers of the board.

Figure 2. Jumper and connector positions

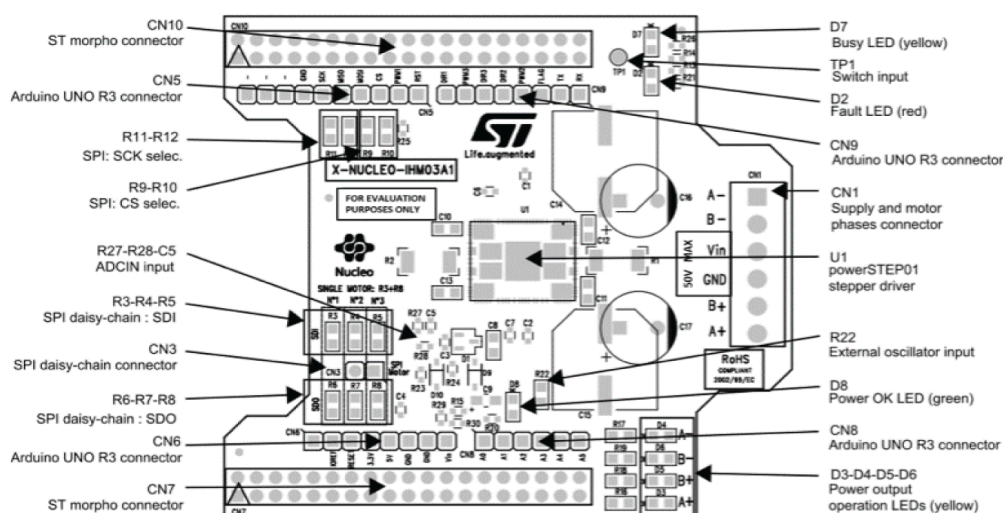

Below are the pinout details for the Arduino UNO R3 and the ST Morpho connectors.

Table 1. Arduino UNO R3 connector table

Connector	Pin ⁽¹⁾	Signal	Remarks
CN5	1	powerSTEP RESET	
	2	Step clock input	
	3	SPI CS	See Section 2.1: Selecting the chip select and clock lines of the SPI
	4	SPI MOSI	See Section 2.2: Multi-motor configuration
	5	SPI MISO	See Section 2.2: Multi-motor configuration
	6	SPI SCK	See Section 2.1: Selecting the chip select and clock lines of the SPI
	7	Ground	
CN9	3	FLAG	
	4	SPI SCK	See Section 2.1: Selecting the chip select and clock lines of the SPI
	5	BUSY / SYNC	
CN6	2	VDD	
	6	Ground	
	7	Ground	
CN8	1	VDD	

Connector	Pin ⁽¹⁾	Signal	Remarks
CN8	3	Ground	

1. All the unlisted pins are not connected.

Table 2. ST Morpho connector table

Connector	Pin ⁽¹⁾	Signal	Remarks
CN10	9	Ground	
	11	SPI SCK	See Section 2.1: Selecting the chip select and clock lines of the SPI
	13	SPI MISO	See Section 2.2: Multi-motor configuration
	15	SPI MOSI	See Section 2.2: Multi-motor configuration
	17	SPI CS	See Section 2.1: Selecting the chip select and clock lines of the SPI
	19	Step clock input	
	21	powerSTEP RESET	
	29	BUSY/SYNC	
	31	SPI CK	See Section 2.1: Selecting the chip select and clock lines of the SPI
	33	FLAG	
CN7	12	VDD	
	20	Ground	
	22	Ground	
	28	ID	
	32	SPI CS	See Section 2.1: Selecting the chip select and clock lines of the SPI

1. All the unlisted pins are not connected.

2.1

Selecting the chip select and clock lines of the SPI

The chip select and the clock lines of the SPI interface can be selected via the appropriate resistors indicated in Table 3. Chip select line selection and Table 4. Clock line selection.

Table 3. Chip select line selection

R9	R10	CS line
Not mounted	0 Ω	CN5 pin3, CN10 pin 17 (default)
0 Ω	Not mounted	CN8 pin 3, CN7 pin 32

Table 4. Clock line selection

R11	R12	SCK line
0 Ω	Not mounted	CN5 pin6, CN10 pin 9 (default)
Not mounted	0 Ω	CN9 pin 4, CN10 pin 31

2.2 Multi-motor configuration

The expansion boards can be stacked on a single STM32 Nucleo board in order to drive up to the three stepper motors (one expansion board for each motor is required).

The configuration is changed by mounting the resistors from R3 to R8 as listed in [Table 5. Multi-motor setup table](#).

The other resistors are not mounted.


By default, the stepper driver board is configured for a single-motor setup, so the board configuration must be changed in multi-motor setups before stacking the boards on the STM32 Nucleo.

Table 5. Multi-motor setup table

Number of motors	Of Board	Mounted resistors
1	-	R3 – R8
2	1 (bottom)	R3 – R6
	2 (top)	R4 – R8
3	1 (bottom)	R3 – R6
	2	R4 – R7
	3 (top)	R5 – R8

3 Schematic diagram

Figure 3. Schematic diagram

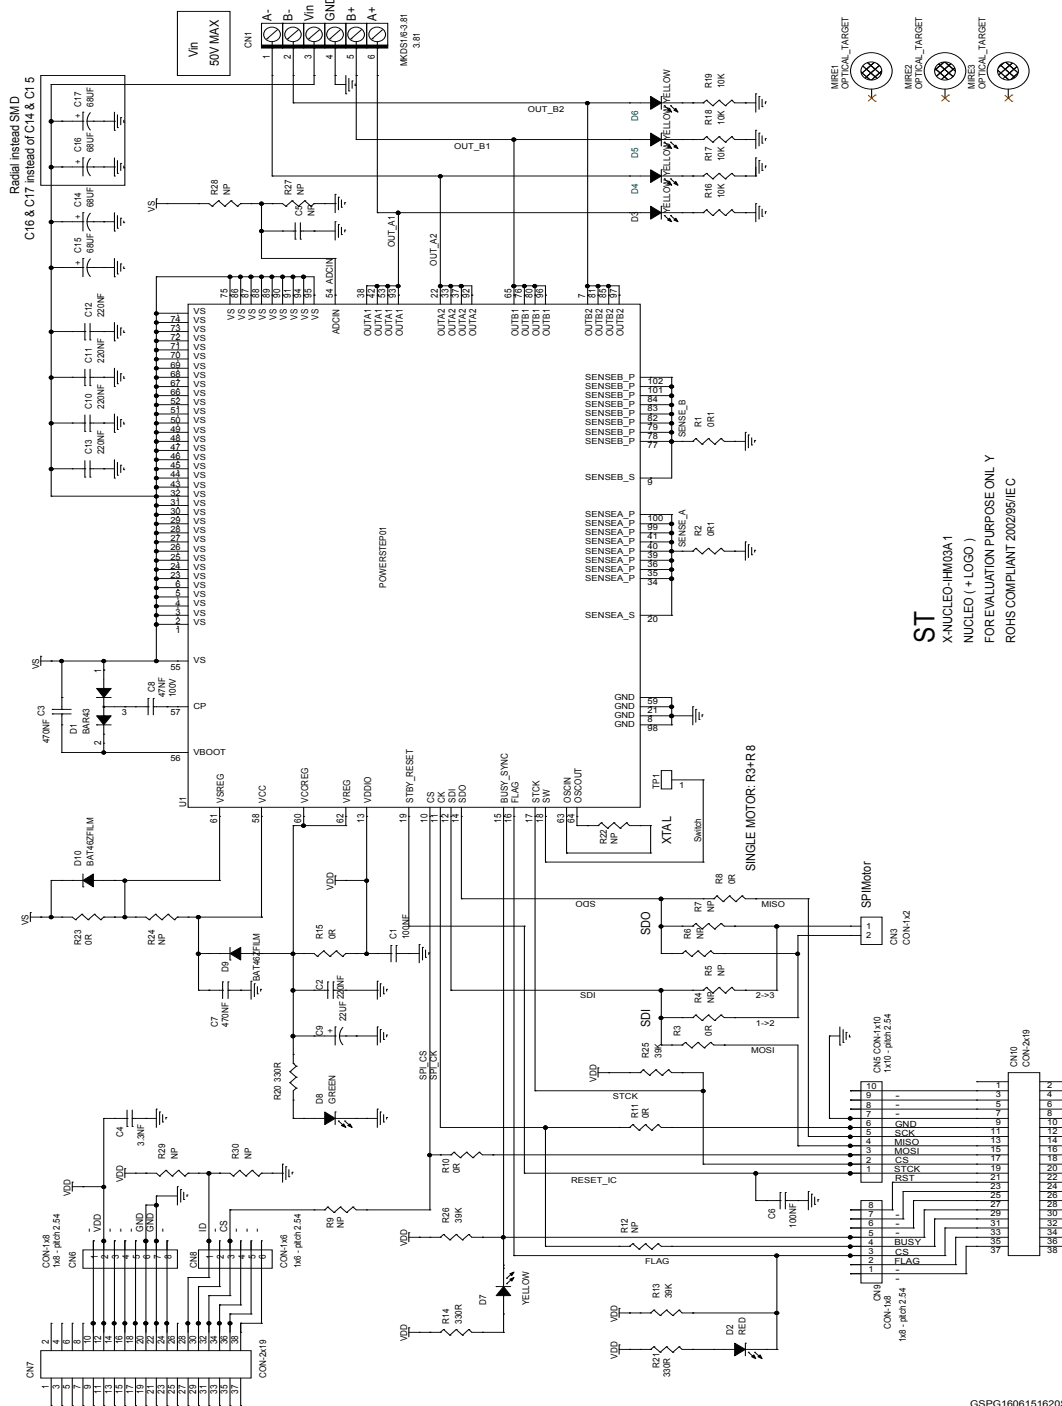

4 Bill of materials

Table 6. BOM list (Part 1)

Item	Reference	Value	Q.ty	Description	Part number
1	C1 C6	100NF	2	CAP CER 100nF 50V X7R 0603	100NF_50V_X7R_0603
2	C2	220NF	1	CAP CER 220nF 35V X7R 0603	220NF_35V_X7R_0603
3	C3 C7	470NF	2	CAP CER 470nF 25V X7R 0603	470NF_25V_X7R_0603
4	C4	3.3NF	1	CAP CER 3.3nF 50V X7R 0603	3.3NF_50V_X7R_0603
5	C5	NP	1	CAP NP 0603	C_NP_0603
6	C8	47NF	1	CAP CER 47nF 100V X7R/X7S 0805	47NF_100V_X7R/X7S_0805
7	C9	22UF	1	CAP TANT 22uF 6V3 10% PACK-A	22UF_6V3_TANT_PACK-A
8	C10-C13	220NF	4	CAP CER 220nF 100V X7R 0805	220NF_100V_X7R_0805
9	C14 C15	68UF	2	CAP ALU 68uF 100V SMD 17x17	EEV-FK2A680Q
10	C16 C17	NP	2	CAP ALU 68uF 100V Radial 10x6-P5	UHE2A680MPD
11	CN1	MKDS1/6-3.81	1	Screw connector 6 poles MKDS 1/6-3.81	MKDS1/6-3.81
12	CN3	CON-1x2	1	THOUGH-HOLE-1x2-Pin height 14.8 - Body 8.5mn - pitch 2.54	SSQ-102-04-F-S
13	CN5	CON-1x10	1	THOUGH-HOLE-1x10-Pin height 14.8 - Body 8.5mn - pitch 2.54	SSQ-110-04-F-S
14	CN6 CN9	CON-1x8	2	THOUGH-HOLE-1x8-Pin height 14.8 - Body 8.5mn - pitch 2.54	SSQ-108-04-F-S
15	CN7 CN10	CON-2x19	2	THOUGH-HOLE-2x19-Pin height 14.8 - Body 8.5mn - pitch 2.54	SSQ-119-04-L-D
16	CN8	CON-1x6	1	THOUGH-HOLE-1x6-Pin height 14.8 - Body 8.5mn - pitch 2.54	SSQ-106-04-F-S
17	D1	BAR43	1	Double Diode High Speed Switching Diode	BAR43
18	D2	RED	1	LED RED - 0805 -2mcd - 621nm	LED_RED
19	D3-D7	YELLOW	5	LED YELLOW - 0805 -6mcd - 588nm	LED_YELLOW
20	D8	GREEN	1	LED GREEN - 0805 -6mcd - 569nm	LED_GREEN
21	D9 D10	BAT46ZFILM	2	DIODE SCHOTTKY 150MA	BAT46
22	MIRE1-MIRE3	OPTICAL_TARGET	3	OPTICAL_TARGET	OPTICAL_TARGET
23	R1 R2	0R1	2	RES 0.1 OHM 5% 2W 2512	0R1_5%_2512
24	R3 R8 R10 R11	0R	4	RES 0 OHM 5% 1/8W 0805	0R_5%_0805
25	R4-R7 R9 R12 R22	NP	7	RES NP 0805	R_NP_0805
26	R13 R25 R26	39K	3	RES 39K OHM 5% 1/10W 0603	39K_5%_0603
27	R14 R20 R21	330R	3	330R OHM 5% 1/10W	330R_5%_0603
28	R15 R23	0R	2	RES 0 OHM 5% 1/10W 0603	0R_5%_0603

Item	Reference	Value	Q.ty	Description	Part number
29	R16-R19	10K	4	RES 10K OHM 5% 1/10W 0805 SMD	10K_5%_0805
30	R24 R27-R30	NP	5	RES NP 0603	R_NP_0603
31	TP1	KEYSTONE-5000	1	TEST POINT RED	KEYSTONE 5000
32	U1	POWERSTEP01	1	Fully integrated stepper motor driver	POWERSTEP01

Table 7. BOM list (Part 2)

Item	Manufact.	Manuf. Part number	Distributor	Distributor Part number
1				
2				
3				
4				
5				
6				
7				
8				
9	PANASONIC	EEV-FK2A680Q		
10	NICHICON	UHE2A680MPD		
11	PHOENIX CONTACT	MKDS1/6-3.81	RS	220-4377
12	SAMTEC	SSQ-102-04-F-S		
13	SAMTEC	SSQ-110-04-F-S		
14	SAMTEC	SSQ-108-04-F-S		
15	SAMTEC	SSQ-119-04-L-D		
16	SAMTEC	SSQ-106-04-F-S		
17	STMICROELECTRONICS	BAR43SFILM	RS	714-0470
18	LITE-ON	LTST-C170-EKT	RS	692-0890
19	LITE-ON	LTST-C170-YKT	RS	692-0925
20	LITE-ON	LTST-C170-GKT	RS	692-0900
21	STMICROELECTRONICS	BAT46ZFILM	RS	714-6850
22				
23				
24				
25				
26				
27				
28				
29				
30				
31	KEYSTONE	KEYSTONE 5000	FARNELL	1463076
32	STMICROELECTRONICS	POWERSTEP01		

5 Board versions

Table 8. X-NUCLEO-IHM03A1 versions

Finished good	Schematic diagrams	Bill of materials
XN\$IHM03A1A ⁽¹⁾	XN\$IHM03A1A schematic diagrams	XN\$IHM03A1A bill of materials

1. This code identifies the X-NUCLEO-IHM03A1 evaluation board first version.

6 Regulatory compliance information

Notice for US Federal Communication Commission (FCC)

For evaluation only; not FCC approved for resale

FCC NOTICE - This kit is designed to allow:

(1) Product developers to evaluate electronic components, circuitry, or software associated with the kit to determine

whether to incorporate such items in a finished product and

(2) Software developers to write software applications for use with the end product.

This kit is not a finished product and when assembled may not be resold or otherwise marketed unless all required FCC equipment authorizations are first obtained. Operation is subject to the condition that this product not cause harmful interference to licensed radio stations and that this product accept harmful interference. Unless the assembled kit is designed to operate under part 15, part 18 or part 95 of this chapter, the operator of the kit must operate under the authority of an FCC license holder or must secure an experimental authorization under part 5 of this chapter 3.1.2.

Notice for Innovation, Science and Economic Development Canada (ISED)

For evaluation purposes only. This kit generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to Industry Canada (IC) rules.

À des fins d'évaluation uniquement. Ce kit génère, utilise et peut émettre de l'énergie radiofréquence et n'a pas été testé pour sa conformité aux limites des appareils informatiques conformément aux règles d'Industrie Canada (IC).

Notice for the European Union

This device is in conformity with the essential requirements of the Directive 2014/30/EU (EMC) and of the Directive 2011/65/EU (RoHS II), including subsequent revisions and additions, as well as amended by the Delegated Directive 2015/863/EU (RoHS III), according to standards EN 55032:2015+A11:2020, EN IEC 61000-6-3:2021, EN 55035:2017+A11:2020, EN IEC 61000-6-1:2019 and EN IEC 63000:2018. Compliance to EMC standards in Class A (industrial intended use).



Notice for United Kingdom

Hereby, the manufacturer STMicroelectronics S.r.l. - Via Camillo Olivetti 2, 20864 Agrate Brianza (MB), Italy (UK site: STMicroelectronics Ltd - Atlas House, Third Avenue, Globe Business Park, Marlow, Bucks, SL7 1EY, United Kingdom), declares that this device is in compliance with the essential requirements of the Directive 2014/30/EU (EMC) and of the Directive 2011/65/EU (RoHS II), including subsequent revisions and additions, as well as amended by the Delegated Directive 2015/863/EU (RoHS III), according to standards EN 55032:2015+A11:2020, EN IEC 61000-6-3:2021, EN 55035:2017+A11:2020, EN IEC 61000-6-1:2019 and EN IEC 63000:2018. Compliance to EMC standards in Class A (industrial intended use).

Revision history

Table 9. Document revision history

Date	Revision	Changes
06-Jul-2015	1	Initial release.
03-Mar-2025	2	Updated the entire document to improve readability. Added <i>Section 5: Regulatory compliance information</i> .
11-Jul-2025	3	Updated Section 6: Regulatory compliance information . Added Section 5: Board versions .

Contents

1	Getting started	2
2	Hardware description and configuration	3
2.1	Selecting the chip select and clock lines of the SPI	4
2.2	Multi-motor configuration	5
3	Schematic diagram	6
4	Bill of materials	7
5	Board versions	9
6	Regulatory compliance information	10
	Revision history	11
	List of tables	13
	List of figures	14

List of tables

Table 1.	Arduino UNO R3 connector table	3
Table 2.	ST Morpho connector table	4
Table 3.	Chip select line selection.	4
Table 4.	Clock line selection	4
Table 5.	Multi-motor setup table	5
Table 6.	BOM list (Part 1)	7
Table 7.	BOM list (Part 2)	8
Table 8.	X-NUCLEO-IHM03A1 versions	9
Table 9.	Document revision history	11

List of figures

Figure 1.	X-NUCLEO-IHM03A1 expansion board for STM32 Nucleo	1
Figure 2.	Jumper and connector positions	3
Figure 3.	Schematic diagram	6

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice.

In the event of any conflict between the provisions of this document and the provisions of any contractual arrangement in force between the purchasers and ST, the provisions of such contractual arrangement shall prevail.

The purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

The purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of the purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

If the purchasers identify an ST product that meets their functional and performance requirements but that is not designated for the purchasers' market segment, the purchasers shall contact ST for more information.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved