



STM32H7Rx/7Sx lines safety manual

Introduction

This document must be read along with the technical documentation such as reference manual(s) and datasheets for the STM32H7Rx/Sx microcontroller devices, available on www.st.com.

It describes how to use the devices in the context of a safety-related system, specifying the user's responsibilities for installation and operation in order to reach the targeted safety integrity level. It also pertains to the **X-CUBE-STL** software product.

It provides the essential information pertaining to the applicable functional safety standards, which allows system designers to avoid going into unnecessary details.

The document is written in compliance with IEC 61508.

The safety analysis in this manual takes into account the device variation in terms of memory size, available peripherals, and package.



1 About this document

1.1 Purpose and scope

This document describes how to use Arm® Cortex®-M7 -based STM32H7Rx/7Sx microcontroller unit (MCU) devices (further also referred to as *Device(s)*) in the context of a safety-related system, specifying the user's responsibilities for installation and operation, in order to reach the desired safety integrity level.

It is useful to system designers willing to evaluate the safety of their solution embedding one or more *Device(s)*.

For terms used, refer to the glossary at the end of the document.

Note: Arm is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

arm

1.2 Normative references

This document is written in compliance with the IEC 61508 international norm for functional safety of electrical, electronic and programmable electronic safety-related systems, version IEC 61508-1-7 © IEC:2010. The compliance to other functional safety standards is considered in reference document [3].

The following table maps the document content with respect to the IEC 61508-2 Annex D requirements.

Table 1. Document sections versus IEC 61508-2 Annex D safety requirements

Safety requirement	Section number
D2.1 a)	Section 3: Reference safety architecture
D2.1 b)	Section 3.2: Compliant item
D2.1 c)	Section 3.2: Compliant item
D2.2 a)	General information are provided in Section 4.1: Random hardware failure safety results. Detailed information on failure modes and related failure rates are included in other reference documents [1], [2] referred in Section 1.3: Reference documents.
D2.2 b)	
D2.2 c)	
D2.2 d)	
D2.2 e)	
D2.2 f)	Useful information for DTI of each safety mechanisms are provided in related specification tables (filed "Periodicity") of Section 3.6: Hardware and software diagnostics. General guidance on DTI is included in Section 3.3.1: Safety requirement assumptions.
D2.2 g)	Because of the software-based nature of Device safety concept, the outputs of the Compliant Item triggered by internal diagnostics are decided at application software level, and so they cannot be described in this manual.
D2.2 h)	Periodic proof test is excluded by specific ASR3.1 in Section 3.3.1: Safety requirement assumptions
D2.2 i)	Section 3.7: Conditions of use
D2.2 j)	Section 3.2.3: Reference safety architectures - 1oo1, Section 3.2.4: Reference safety architectures - 1oo2
D2.2 k)	Section 3.2.2: Safety functions performed by Compliant item


1.3 Reference documents

- [1] AN6041: Results of FMEA on microcontrollers of the STM32H7R3/S3 and STM32H7R7/S7 lines
- [2] AN6038: Results of FMEDA on microcontrollers of the STM32H7R3/S3 and STM32H7R7/S7 lines
- [3] AN5698: Adapting the X-CUBE-STL functional safety package for STM32 (IEC 61508 compliant) to other safety standards
- [4] AN5936 X-CUBE-STL: advanced topics

2 Device development process

STM32 series product development process (see Figure 1), compliant with the IATF 16949 standard, is a set of interrelated activities dedicated to transform customer specification and market or industry domain requirements into a semiconductor device and all its associated elements (package, module, sub-system, hardware, software, and documentation), qualified with ST internal procedures and fitting ST internal or subcontracted manufacturing technologies.

Figure 1. STMicroelectronics product development process

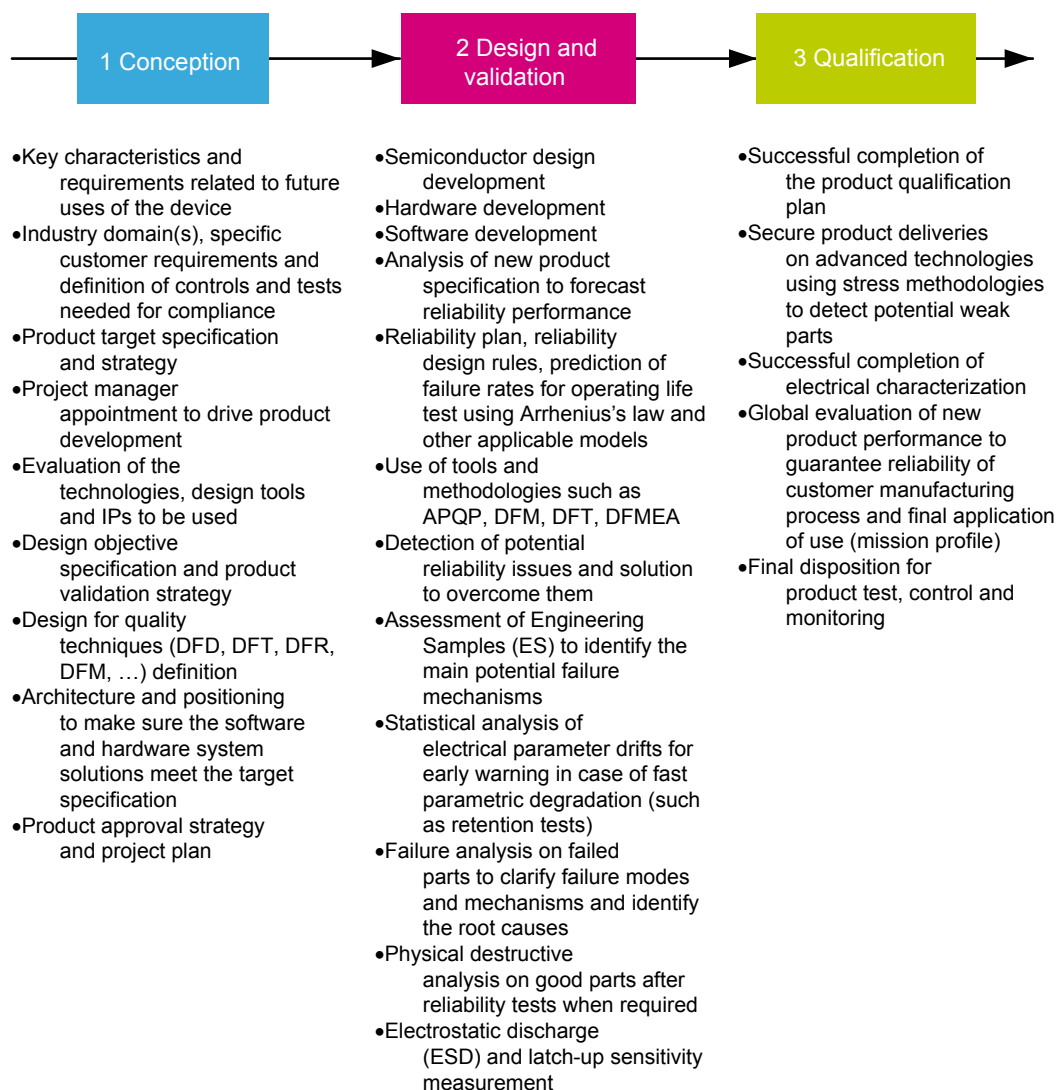

3 Reference safety architecture

This section reports details of the STM32H7Rx/7Sx safety architecture.

3.1 Safety architecture introduction

The *Device(s)* analyzed in this document can be used as *Compliant item(s)* within different safety applications.

The aim of this section is to identify such *Compliant item(s)*, that is, to define the context of the analysis with respect to a reference concept definition. The concept definition contains reference safety requirements, including design aspects which are outside of the defined *Compliant item*.

As a consequence of a *Compliant item* approach, the goal is to list the system-related information considered during the analysis, rather than to provide an exhaustive hazard and risk analysis of the system around *Device*. Such information includes, among others, application-related assumptions for danger factors, frequency of failures and diagnostic coverage guaranteed by the application.

3.2 Compliant item


This section defines the *Compliant item* term and provides information on its usage in different safety architecture schemes.

3.2.1 Definition of Compliant item

According to IEC 61508-1 clause 8.2.12, a *Compliant item* is any item (for example an element) on which a claim is being made with respect to the clauses of the IEC 61508 series. Any mature *Compliant item* must be described in a safety manual available to the *End user*.

In this document, *Compliant item* is defined as a system including one or two STM32 devices (see Figure 2). The communication bus is directly or indirectly connected to sensors and actuators.

Figure 2. STM32 as *Compliant item*

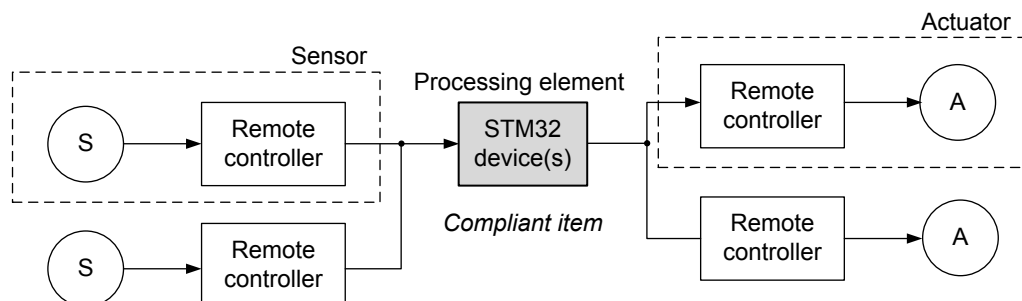

Other components might be related to the *Compliant item*, like the external HW components needed to guarantee either the functionality of the *Device* (external memory, clock quartz and so on) or its safety (for example, the external watchdog or voltage supervisors).

A defined *Compliant item* can be classified as *element* according to IEC 61508-4, 3.4.5.

In summary, claims related to this *Compliant item* are related to the possible use of a *Device* for the implementation of any safety function up to SIL2 (for a single *Device*) and up to SIL3 (for two distinct *Devices*), with specific architectures and observing all the requirements and indications provided in this manual.

3.2.2 Safety functions performed by Compliant item

In essence, *Compliant item* architecture encompasses the following processes performing the safety function or a part of it:

- input processing elements (PEi) reading safety related data from the remote controller connected to the sensor(s) and transferring them to the following computation elements
- computation processing elements (PEc) performing the algorithm required by the safety function and transferring the results to the following output elements

- output processing elements (PEo) transferring safety related data to the remote controller connected to the actuator
- in 1oo2 architecture, potentially a further voting processing element (PEv)
- the computation processing elements can be involved (to the extent depending on the target safety integrity) in the implementation of local software-based diagnostic functions; this is represented by the block PEd
- processes external to *Compliant item* ensuring safety integrity, such as watchdog (WDTe) and voltage monitors (VMONe)

The role of the PEv process is clarified in [Section 3.2.4: Reference safety architectures - 1oo2](#). The role of the WDTe and VMONe external processes is clarified under [Section 3.6: Hardware and software diagnostics](#):

- WDTe: refer to [External watchdog – CPU_SM_5](#) and [Control flow monitoring in Application software – CPU_SM_1](#),
- VMONe: refer to [Supply voltage internal monitoring \(PVD\) \(VSUP_SM_1\)](#) and [System-level power supply management \(VSUP_SM_5\)](#).

In summary, *Devices* support the implementation of *End user* safety functions consisting of three operations:

- safe acquisition of safety-related data from input peripheral(s)
- safe execution of *Application software* program and safe computation of related data
- safe transfer of results or decisions to output peripheral(s)

Claims on *Compliant item* and computation of safety metrics are done with respect to these three basic operations.

Caution: *Due to the general purpose nature of the Device, its safety concept is mainly software-based. Accordingly, any following claim related to the possibility of Device itself to support the implementation of safety functions up to a certain SIL is strongly correlated to the observance of CoUs as requested in [Section 3.7: Conditions of use](#).*

According to the definition for implemented safety functions, *Compliant item* (element) can be regarded as type B (as per IEC 61508-2, 7.4.4.1.3 definition). Despite accurate, exhaustive, and detailed failure analysis, *Device* has to be considered as intrinsically complex. This implies its type B classification.


Two main safety architectures are identified: 1oo1 (using one *Device*) and 1oo2 (using two *Devices*).

3.2.3 Reference safety architectures - 1oo1

1oo1 reference architecture ([Figure 3](#)) ensures safety integrity of *Compliant item* through combining *Device* internal processes (implemented safety mechanisms) with external processes WDTe and VMONe.

1oo1 reference architecture targets [safety integrity level \(SIL\) SIL2](#).

Figure 3. 1oo1 reference architecture

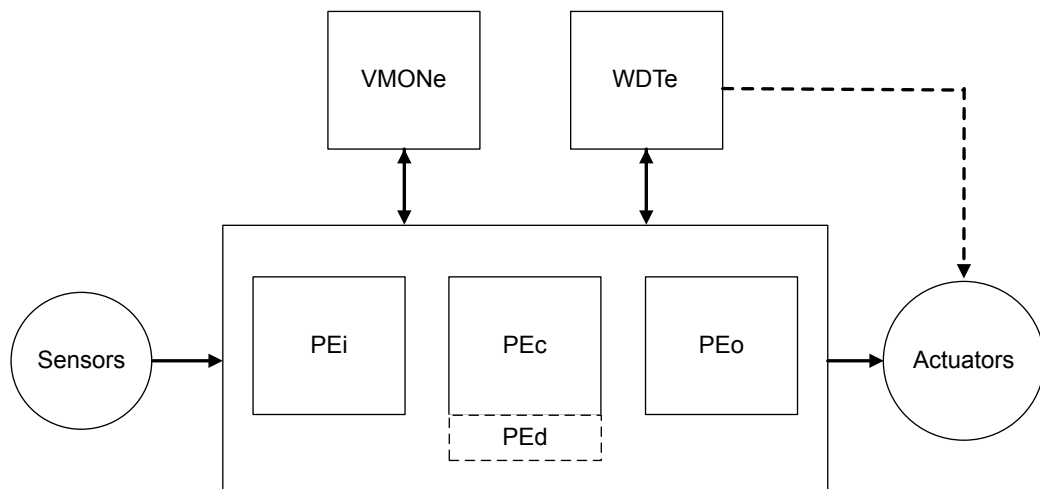


3.2.4 Reference safety architectures - 1oo2

The 1oo2 reference architecture (Figure 4) contains two separate channels, either implemented as a 1oo1 reference architecture ensuring safety integrity of the *Compliant item* through combining *Device* internal processes (implemented safety mechanisms) with external processes: WDT_e and VMON_e. The overall safety integrity is then ensured by the external voter PE_v, which allows claiming [hardware fault tolerance \(HFT\)](#) equal to 1. The PE_v role is indeed to facilitate the safety function processing by each of the two individual channels, to allow the correct execution of the safety function even in case one channel is faulty. The complexity of the PE_v implementation strongly depends on the nature of the safety function and safe state definitions. Achievement of higher safety integrity levels as per IEC 61508-2 Table 3 is therefore possible. Appropriate separation between the two channels (including power supply separation) must be implemented in order to avoid huge impact of common-cause failures (refer to [Section 4.2: Analysis of dependent failures](#)). However, β and β_D parameters computation is required.

This architecture targets *SIL*3, under the assumption that each channel follows all requirements indicated for *SIL*2 in this manual.

Attention: According the clause 7.4.3.2 in IEC 61508-2, this architectural scheme may provide benefits to the software applications systematic capability (SC) only in case diverse software is adopted on the two channels.

Figure 4. 1oo2 reference architecture

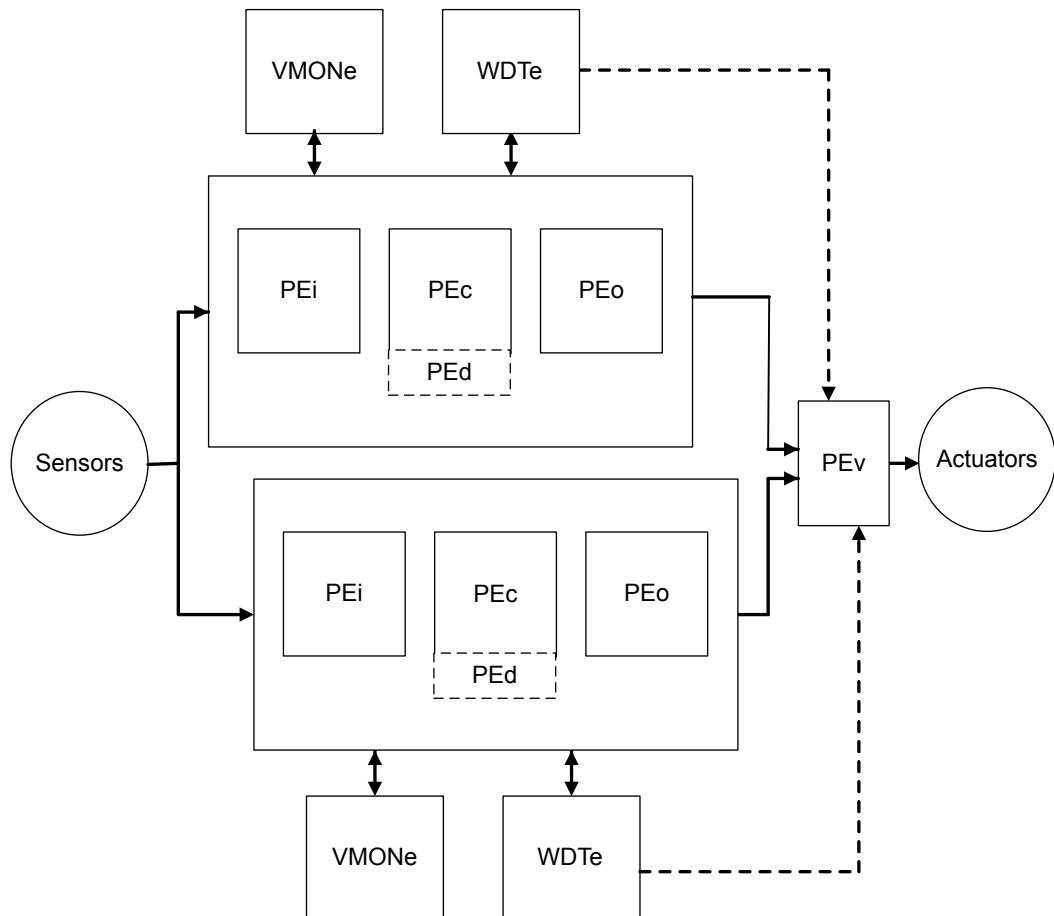

3.3 Safety analysis assumptions

This section collects all assumptions made during the safety analysis of the *Devices*.

3.3.1 Safety requirement assumptions

The safety concept specification, the overall safety requirement specification and the consequent allocation determine the assumed requirements for *Compliant item* as further listed. *ASR* stands for assumed safety requirement.

Caution: *It is End user's responsibility to check the compliance of the final application with these assumptions.*


ASR1: *Compliant item* can be used to implement four kinds of safety function modes of operation according to IEC 61508-4, 3.5.16:

- a continuous mode (CM) or high-demand (HD) SIL3 safety function (CM3), or
- a low-demand (LD) SIL3 safety function (LD3), or
- a CM or HD SIL2 safety function (CM2), or
- a LD SIL2 safety function (LD2).

ASR2: *Compliant item* is used to implement safety function(s) allowing a specific worst-case time budget (see note below) for the STM32 MCU to detect and react to a failure. That time corresponds to the portion of the process safety time (PST) allocated to *Device* (STM32xx Series duty in Figure 5) in error reaction chain at system level.

Note: *The computation for time budget mainly depends on the execution speed for periodic tests implemented by software. Such duration might depends on the actual amount of hardware resources (RAM memory, flash memory, peripherals) actually declared as safety-related. Further constraints and requirements from IEC 61508-2, 7.4.5.3 must be considered.*

Figure 5. Allocation and target for STM32 PST

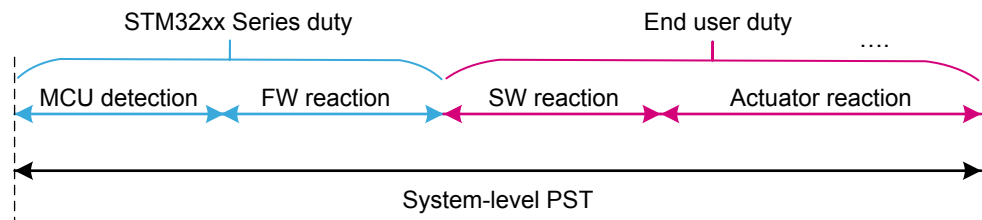

ASR3.1: *Compliant item* is assumed to be operating at constant failure rate and does not intrinsically require any proof tests.

ASR3.2: It is assumed that the *Device* operates within specified electrical specifications and environment limits. The *End user* is responsible for the compliance to this assumption.

ASR4: It is assumed that only one safety function is performed or if many, all functions are classified with the same *SIL* and therefore they are not distinguishable in terms of their safety requirements.

ASR5: In case of multiple safety function implementations, it is assumed that *End user* is responsible to duly ensure their mutual independence.

ASR6: It is assumed that there are no *non-safety-related* functions implemented in *Application software*, coexisting with safety functions.

Note: *This assumption is stated due to the lack of hardware-based mechanisms able to completely isolate non-safety related software. Software-based isolation solutions are not forbidden.*

ASR7: It is assumed that the implemented safety function(s) does (do) not depend on transition of *Device* to and from a low-power state.

ASR8: After the emergence of a fault, the local safe state of *Compliant item* is the one in which either:

- SS1: *Application software* is informed by the presence of a fault and a reaction by *Application software* itself is possible.
- SS2: *Application software* cannot be informed by the presence of a fault or *Application software* is not able to execute a reaction.

Note: For a correct implementation of fault reaction, the End user must be aware that random hardware failures affecting the Device can compromise its operation (for example failure modes affecting the program counter may prevent the correct execution of the software). Accordingly, software-based transitions to a safe state must be carefully evaluated. Refer to [4] for additional details.

The following table provides details on the SS1 and SS2 safe states.

Table 2. SS1 and SS2 safe state details

Safe state	Condition	Compliant item action	System transition to safe state – 1oo1 architecture	System transition to safe state – 1oo2 architecture
SS1	<i>Application software</i> is informed by the presence of a fault and a reaction by <i>Application software</i> itself is possible.	Fault reporting to <i>Application software</i>	<i>Application software</i> drives the overall system in its safe state	<i>Application software</i> in one of the two channels drives the overall system in its safe state
SS2	<i>Application software</i> cannot be informed by the presence of a fault or <i>Application software</i> is not able to execute a reaction.	Reset signal issued by WDTe	WDTe drives the overall system in its safe state (“safe shut-down”) ⁽¹⁾	PEv drives the overall system in its safe state

1. Safe state achievement intended here is compliant to Note on IEC 61508-2, 7.4.8.1

ASR9: It is assumed that the safe state defined at system level by *End user* is compatible with the assumed local safe state (SS1, SS2) for *Compliant item*.

ASR10: *Compliant item* is assumed to be analyzed according to routes 1H and 1S of IEC 61508-2.

Note: Refer to [Section 3.5: Systematic safety integrity](#) and [Section 3.6: Hardware and software diagnostics](#).

ASR11: *Compliant item* is assumed to be regarded as type B, as per IEC 61508-2, 7.4.4.1.3.

ASR13: It is assumed that the evaluation of hazards related to human factors (like misuse or security issues) related to the use of the *Compliant item* is under the full responsibility of the *End user*.

ASR14: It is assumed that if external flash memories are used to store safety related executable code and/or data, then it is the responsibility of the End User to include such memories in the perimeter of the *Compliant item* (as defined in 3.2.1) and therefore to include related safety metrics in the computations for the integrity of the safety function(s).

ASR15: It is the responsibility of the End User to guarantee the safety integrity of the application software (including diagnostics) object code stored in SRAM by the used bootloader.

Note: This assumption implies the use of a safety-related bootloader or the adoption of specific countermeasures at system level. Guidance is provided in [Table 187. List of safety recommendations](#), section System boot and in . Refer to [4] for further clarifications.

3.4 Electrical specifications and environment limits

To ensure safety integrity, the user must operate *Device(s)* within its (their) specified:

- Absolute maximum rating
- Capacity
- Operating conditions

For electrical specifications and environmental limits of *Device(s)*, refer to its (their) technical documentation such as datasheet(s) and reference manual(s) available on www.st.com.

Note: The device operation within specified limits is a prerequisite for the correct implementation of any safety function. This is explicitly assumed within the assumptions (refer to above [ASR3.2](#)).

3.5 Systematic safety integrity

According to the requirements of the IEC 61508-2, 7.4.2.2 clause, the *Route 1S* is considered in the safety analysis of *Device(s)*. As authorized by the IEC 61508-2, 7.4.6.1 clause, the STM32 MCU products can be considered as standard, mass-produced electronic integrated devices, for which stringent development procedures, rigorous testing and extensive experience of use minimize the likelihood of design faults. However, ST internally assesses the compliance of the *Device* development flow, through techniques and measures suggested in the IEC 61508-2 Annex F. As highly confidential information on ST processes are concerned within the evaluation activity, the *safety case database* (see [Section 5: List of evidences](#)) keeps evidences of the current compliance level to the standard.

3.6 Hardware and software diagnostics

This section lists all the safety mechanisms (hardware, software and application-level) considered in the *Device* safety analysis. It is expected that users are familiar with the architecture of *Device*, and that this document is used in conjunction with the related *Device* datasheet, user manual and reference information. To avoid inconsistency and redundancy, this document does not report device functional details. In the following descriptions, the words *safety mechanism*, *method*, and *requirement* are used as synonyms.

As the document provides information relative to the superset of peripherals available on the devices it covers (not all devices have all peripherals), users are supposed to disregard any recommendations not applicable to their *Device* part number of interest.

Information provided for a function or peripheral applies to all instances of such function or peripheral on *Device*. Refer to its reference manual or/and datasheet for related information.

The implementation guidelines reported in the following section are for reference only. The safety verification executed by ST during the *Device* safety analysis and related diagnostic coverage figures reported in this manual (or related documents) are based on such guidelines. For clarity, safety mechanisms are grouped by *Device* function.

Information is organized in form of tables, one per safety mechanism, with the following fields:

SM CODE	Unique safety mechanism code/identifier used also in <i>FMEA</i> document. Identifiers use the scheme <i>mmm_SM_x</i> where <i>mmm</i> is a 3- or 4-letter module (function, peripheral) short name, and <i>x</i> is a number. It is possible that the numbering is not sequential (although usually incremental) and/or that the module short name is different from that used in other documents.
Description	Short mnemonic description
Ownership	ST: method is available on silicon. <i>End user</i> : method must be implemented by <i>End user</i> through <i>Application software</i> modification, hardware solutions, or both.
Detailed implementation	Detailed implementation sometimes including notes about the safety concept behind the introduction of the safety mechanism.
Error reporting	Describes how the fault detection is reported to <i>Application software</i> .
Fault detection time	Time that the safety mechanism needs to detect the hardware failure.
Addressed fault model	Reports fault model(s) addressed by the diagnostic (permanent, transient, or both), and other information: <ul style="list-style-type: none"> If ranked for <i>Fault avoidance</i>: method contributes to lower the probability of occurrence of a failure If ranked for <i>Systematic</i>: method is conceived to mitigate systematic errors (bugs) in <i>Application software</i> design
Dependency on Device configuration	Reports if safety mechanism implementation or characteristics change among different <i>Device</i> part numbers.
Initialization	Specific operation to be executed to activate the contribution of the safety mechanism
Periodicity	Continuous : safety mechanism is active in continuous mode. Periodic: safety mechanism is executed periodically ⁽¹⁾ . On-demand: safety mechanism is activated in correspondence to a specified event (for instance, reception of a data message). Startup: safety mechanism to be executed only at power-up or during off-line maintenance periods. This is due to functional-only aspects or due to the poor compatibility with the correct execution of the safety function.

- Test for the diagnostic** Reports specific procedure (if any and recommended) to allow on-line tests of safety mechanism efficiency. If no specific procedure applies (as for the majority of safety mechanisms), the field indicates *Not applicable*.
- Multiple-fault protection** Reports the safety mechanism(s) associated in order to correctly manage a multiple-fault scenario (refer to [Section 4.1.3: Notes on multiple-fault scenario](#)).
- Recommendations and known limitations** Additional recommendations or limitations (if any) not reported in other fields.
1. In CM systems, safety mechanism can be accounted for diagnostic coverage contribution only if it is executed at least once per PST. For LD and HD systems, constraints from IEC 61508-2, 7.4.5.3 must be applied.

3.6.1

Arm® Cortex®-M7 CPU

Table 3. CPU_SM_0

SM CODE	CPU_SM_0
Description	Periodic core self-test software for Arm® Cortex®-M7 CPU.
Ownership	End user or ST (X-CUBE-STL, see X-CUBE-STL self-test software library)
Detailed implementation	The software test is built around well-known techniques already addressed by IEC 61508-7, A.3.2 (Self-test by software: walking bit one-channel). To reach the required values of coverage, the self-test software is specified by means of a detailed analysis of all the CPU failure modes and related failure modes distribution.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on Device configuration	None
Initialization	None
Periodicity	Periodic
Test for the diagnostic	Self-diagnostic capabilities can be embedded in the software, according to the test implementation design strategy chosen. The adoption of checksum protection on results variables and defensive programming are recommended.
Multiple-fault protection	CPU_SM_5: External watchdog
Recommendations and known limitations	<p>This method is the main asset in STM32H7Rx/7Sx safety concept. Hardware integrity of the CPU is a key factor, given that the defined diagnostics for MCU peripherals are to major part software-based.</p> <p>Startup execution of this safety mechanism is recommended for multiple fault mitigations - refer to Section 4.1.3: Notes on multiple-fault scenario for details.</p>

Table 4. CPU_SM_1

SM CODE	CPU_SM_1
Description	Control flow monitoring in Application software.
Ownership	End user
Detailed implementation	<p>A significant part of the failure distribution of <i>CPU</i> core for permanent faults is related to failure modes directly related to program counter loss of control or hang-up. Due to their intrinsic nature, such failure modes are not addressed by a standard software test method like SM_CPU_0. Therefore, it is necessary to implement a run-time control of <i>Application software</i> flow in order to monitor and detect deviation from the expected behavior due to such faults. Linking this mechanism to watchdog firing assures that severe loss of control (or, in the worst case, a program counter hang-up) is detected.</p> <p>The guidelines for the implementation of the method are the following:</p> <ul style="list-style-type: none"> • Different internal states of <i>Application software</i> are well documented and described (the use of a dynamic state transition graph is encouraged). • Monitoring of the correctness of each transition between different states of <i>Application software</i> is implemented. • Transition through all expected states during the normal <i>Application software</i> program loop is checked. • A function in charge of triggering the system watchdog is implemented in order to constrain the triggering (preventing the issue of <i>CPU</i> reset by watchdog) also to the correct execution of the above-described method for program flow monitoring. The use of window feature available on internal window watchdog (WWDG) is recommended. • The use of the independent watchdog (IWDG), or an external one, helps to implement a more robust control flow mechanism fed by a different clock source. <p>In any case, safety metrics do not depend on the kind of watchdog in use (the adoption of independent or external watchdog contributes to the mitigation of dependent failures, see Section 4.2.2: Clock).</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation. Higher value is fixed by watchdog timeout interval.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

Table 5. CPU_SM_2

SM CODE	CPU_SM_2
Description	Double computation in <i>Application software</i>
Ownership	<i>End user</i>
Detailed implementation	<p>A timing redundancy for safety-related computation is considered to detect transient faults affecting the Arm®Cortex®-M7 CPU subparts devoted to mathematical computations and data access.</p> <p>The guidelines for the implementation of the method are the following:</p> <ul style="list-style-type: none"> The requirement needs be applied only to safety-relevant computation, which in case of wrong result could interfere with the system safety functions. Such computation must be therefore carefully identified in the original <i>Application software</i> source code Both mathematical operation and comparison are intended as computation. The redundant computation for mathematical computation is implemented by using copies of the original data for second computation, and by using an equivalent formula if possible
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p><i>End user</i> is responsible to carefully avoid that the intervention of optimization features of the used compiler removes timing redundancies introduced according to this condition of use.</p> <p>Reduction to the application scope for this method is achieved by executing an accurate safety analysis of the software. Refer to [4] for details. However, the scope reduction may not be possible nor desirable.</p>

Table 6. CPU_SM_3

SM CODE	CPU_SM_3
Description	Arm®Cortex®-M7 HardFault exceptions
Ownership	ST
Detailed implementation	<p>HardFault exception raise is an intrinsic safety mechanism implemented in Arm®Cortex®-M7 core, mainly dedicated to intercept systematic faults due to software limitations or error in software design (causing for example execution of undefined operations, unaligned address access). This safety mechanism is also able to detect hardware random faults inside the CPU bringing to such described abnormal operations.</p>
Error reporting	High-priority interrupt event
Fault detection time	Depends on implementation. Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	None
Periodicity	Continuous
Test for the diagnostic	It is possible to write a test procedure to verify the generation of the HardFault exception; anyway, given the expected minor contribution in terms of hardware random-failure detection, such implementation is optional.
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Enabling related interrupt generation on the detection of errors is highly recommended.

Table 7. CPU_SM_4

SM CODE	CPU_SM_4
Description	Stack hardening for <i>Application software</i>
Ownership	<i>End user</i>
Detailed implementation	<p>The stack hardening method is required to address faults (mainly transient) affecting the CPU register bank. This method is based on source code modification, introducing information redundancy in register-passed information to called functions.</p> <p>The guidelines for the implementation of the method are the following:</p> <ul style="list-style-type: none"> • To pass also a redundant copy of the passed parameters values (possibly inverted) and to execute a coherence check in the function. • To pass also a redundant copy of the passed pointers and to execute a coherence check in the function. • For parameters that are not protected by redundancy, to implement defensive programming techniques (plausibility check of passed values). For example enumerated fields are to be checked for consistency.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This method partially overlaps with defensive programming techniques required by IEC 61508 for software development. Therefore in presence of <i>Application software</i> qualified for safety integrity greater or equal to SC2, optimizations are possible.

Table 8. CPU_SM_5

SM CODE	CPU_SM_5
Description	External watchdog
Ownership	<i>End user</i>
Detailed implementation	<p>Using an external watchdog linked to control flow monitoring method (refer to CPU_SM_1) addresses failure mode of program counter or control structures of the <i>CPU</i>.</p> <p>External watchdog can be designed to be able to generate the combination of signals needed on the final system to achieve the safe state. It is recommended to carefully check the assumed requirements about system safe state reported in Section 3.3.1: Safety requirement assumptions.</p> <p>Compared to the <i>MCU</i> internal watchdogs, it is not affected by potential common cause failures, because the external watchdog is clocked and supplied independently of <i>Device</i>.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation (watchdog timeout interval)
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	To be defined at system level (outside the scope of <i>Compliant item</i> analysis).
Multiple-fault protection	CPU_SM_1: Control flow monitoring in Application software
Recommendations and known limitations	<p>In case of usage of windowed watchdog, <i>End user</i> must consider possible tolerance in <i>Application software</i> execution to avoid false error reports (affecting system availability).</p> <p>It is worth noting that the use of an external watchdog is needed when <i>Device</i> is used to trigger final elements, in order to comply at system level with requirements from IEC 61508-2:2010 Table A.1/Table A.14.</p>

Table 9. CPU_SM_6

SM CODE	CPU_SM_6
Description	Independent watchdog
Ownership	ST
Detailed implementation	Using the IWDG watchdogs linked to control flow monitoring method (refer to CPU_SM_1) addresses failure mode of program counter or control structures of the <i>CPU</i> .
Error reporting	Reset signal generation
Fault detection time	Depends on implementation (watchdog timeout interval)
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	IWDG activation. It is recommended to use <i>hardware watchdog</i> in option byte settings (IWDG is automatically enabled after reset).
Periodicity	Continuous
Test for the diagnostic	WDG_SM_1: Software test for watchdog at startup
Multiple-fault protection	<p>CPU_SM_1: Control flow monitoring in Application software</p> <p>WDG_SM_0: Periodic read-back of configuration registers</p>
Recommendations and known limitations	<p>The IWDG intervention is able to achieve a potentially “incomplete” local safe state because it can only guarantee that <i>CPU</i> is reset. No guarantee that <i>Application software</i> can be still executed to generate combinations of output signals that might be needed by the external system to achieve the final safe state. If this limitation turn out in a blocking point, <i>End user</i> must adopt CPU_SM_5.</p>

Table 10. CPU_SM_7

SM CODE	CPU_SM_7
Description	Memory protection unit (<i>MPU</i>).
Ownership	ST
Detailed implementation	The <i>CPU</i> memory protection unit is able to detect illegal access to protected memory areas, according to criteria set by <i>End user</i> .
Error reporting	Exception raise (MemManage).
Fault detection time	Refer to functional documentation
Addressed fault model	Systematic (software errors) Permanent/transient (only program counter and memory access failures)
Dependency on <i>Device</i> configuration	None
Initialization	<i>MPU</i> registers must be programmed at start-up.
Periodicity	On line
Test for the diagnostic	MPU_SM_1: <i>MPU</i> software test
Multiple-fault protection	MPU_SM_0: Periodic read-back of <i>MPU</i> configuration registers
Recommendations and known limitations	<p>The use of memory partitioning and protection by <i>MPU</i> functions is highly recommended when multiple safety functions are implemented in <i>Application software</i>. The <i>MPU</i> can be indeed used to</p> <ul style="list-style-type: none"> enforce privilege rules separate processes enforce access rules <p>Hardware random-failure detection capability for <i>MPU</i> is restricted to well-selected failure modes, mainly affecting program counter and memory access <i>CPU</i> functions. The associated diagnostic coverage is therefore not expected to be relevant for the safety concept of <i>Device</i>.</p>

Table 11. CPU_SM_9

SM CODE	CPU_SM_9
Description	Periodic self-test software for Arm®Cortex® -M7 caches
Ownership	<i>End user</i> or ST
Detailed implementation	<p>The software test is built around well-known techniques already addressed by IEC 61508-7, A.3.2 (Self-test by software: walking bit one-channel).The scope of the software test are failure modes affecting Arm®Cortex® -M7 L1 caches controllers.</p> <p>The achieved diagnostic coverage strongly depends on the complexity of the test implementation, and on the percentage of caches failure modes addressed.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_5: External watchdog
Recommendations and known limitations	<p><i>End user</i> waiver of cache features, disabling it by software, leads to the following simplifications in STM32H7Rx/7Sx safety concept:</p> <ul style="list-style-type: none"> No need to implement this method (CPU_SM_9) Decrease of Arm®Cortex® -M7 overall failure rate.

Table 12. CPU_SM_10

SM CODE	CPU_SM_10
Description	ECC on Arm®Cortex® -M7 caches
Ownership	ST
Detailed implementation	<p>ECC on Arm®Cortex® -M7 L1 cache memories (data and instructions) are protected by an ECC (error correction code) redundancy, implementing a protection feature at double-word (64 bit) level:</p> <ul style="list-style-type: none"> one-bit fault: correction two-bit fault: detection
Error reporting	Error correction/detection is reported in IEBR0/1 and DEBR0/1 registers. Refer to Arm® documentation.
Fault detection time	ECC bits are checked during cache usage
Addressed fault model	Permanent/transient
Dependency on Device configuration	None
Initialization	None
Periodicity	Continuous
Test for the diagnostic	<p>Direct test procedure for ECC efficiency is not available. ECC run-time hardware failures leading to the disable of such protection, or to wrong corrections, fall into a "multiple fault scenario" from IEC 61508 perspective. Related failures are adequately mitigated by the combination of safety mechanisms reported in this table, field <i>Multiple-fault protection</i>.</p> <p>Refer to [1] for details on ECC failure mitigation strategy. Read also the note on <i>Recommendations and known limitations</i> field.</p>
Multiple-fault protection	<p>CPU_SM_1: Control flow monitoring in Application software</p> <p>CPU_SM_3: Arm®Cortex®-M7 HardFault exceptions</p> <p>CPU_SM_4: Stack hardening for <i>Application software</i></p> <p>RAM_SM_3: Information redundancy for safety-related variables in the <i>Application software</i></p>
Recommendations and known limitations	None

Table 13. MPU_SM_0

SM CODE	MPU_SM_0
Description	Periodic read-back of MPU configuration registers
Ownership	End user
Detailed implementation	<p>This method must be applied to MPU configuration registers (also unused by End user Application software).</p> <p>Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI).</p>
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on Device configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 14. MPU_SM_1

SM CODE	MPU_SM_1
Description	MPU software test
Ownership	End user
Detailed implementation	<p>This method tests MPU capability to detect and report memory accesses violating the policy enforcement implemented by the MPU itself.</p> <p>The implementation is based on intentionally performing read and write accesses outside the memory areas allowed by the MPU region programming, and collecting and verifying related generated error exceptions.</p> <p>Test can be executed with the final MPU region programming or with a dedicated one.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on Device configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Startup execution of this safety mechanism is recommended for multiple fault mitigations - refer to Section 4.1.3: Notes on multiple-fault scenario .

3.6.2 System bus architecture/BusMatrix

Table 15. BUS_SM_0

SM CODE	BUS_SM_0
Description	Periodic software test for interconnections
Ownership	End user
Detailed implementation	<p>The intra-chip connection resources (Bus Matrix, AHB or APB bridges) needs to be periodically tested for permanent faults detection. Note that STM32H7Rx/7Sx devices have no hardware safety mechanism to protect these structures. The test executes a connectivity test of these shared resources, including the testing of the arbitration mechanisms between peripherals.</p> <p>According to IEC 61508-2 Table A.8, A.7.4 the method is considered able to achieve high levels of coverage.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on Device configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Implementation can be considered in large part as overlapping with the widely used <i>Periodic read-back of configuration registers</i> required for several peripherals.

Table 16. BUS_SM_1

SM CODE	BUS_SM_1
Description	Information redundancy in intra-chip data exchanges
Ownership	<i>End user</i>
Detailed implementation	This method requires to add some kind of redundancy (for example a CRC checksum at packet level) to each data message exchanged inside <i>Device</i> . Message integrity is verified using the checksum by the <i>Application software</i> , before consuming data.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Implementation can be in large part overlapping with other safety mechanisms requiring information redundancy on data messages for communication peripherals. Optimizations are therefore possible.

3.6.3 Embedded SRAM

Table 17. RAM_SM_0

SM CODE	RAM_SM_0
Description	Periodic software test for static random access memory (SRAM)
Ownership	<i>End user</i> or ST (X-CUBE-STL, see X-CUBE-STL self-test software library)
Detailed implementation	To enhance the coverage on SRAM data cells and to ensure adequate coverage for permanent faults affecting the address decoder it is required to execute a periodic software test on the system RAM memory. The selection of the algorithm must ensure the target SFF coverage for both the RAM cells and the address decoder. Evidences of the effectiveness of the coverage of the selected method must also be collected
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	RAM size can change according to the part number.
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Self-diagnostic capabilities can be embedded in the software, according to the test implementation design strategy chosen.
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Usage of a March test C- is recommended. Because the nature of this test can be destructive, RAM contents restore must be implemented. Possible interferences with interrupt-serving routines fired during test execution must be also considered (such routines can access to RAM invalid contents). Startup execution of this safety mechanism is recommended for multiple fault mitigations - refer to Section 4.1.3: Notes on multiple-fault scenario . Unused RAM section can be excluded by the testing, under <i>End user</i> responsibility on actual RAM usage by final <i>Application software</i> .

Table 18. RAM_SM_2

SM CODE	RAM_SM_2
Description	Stack hardening for <i>Application software</i>
Ownership	<i>End user</i>
Detailed implementation	<p>The stack hardening method is used to enhance the <i>Application software</i> robustness to SRAM faults that affect the address decoder. The method is based on source code modification, introducing information redundancy in the stack-passed information to the called functions. Method contribution is relevant in case the combination between the final <i>Application software</i> structure and the compiler settings requires a significant use of the stack for passing function parameters.</p> <p>Implementation is the same as method CPU_SM_4.</p>
Error reporting	Refer to CPU_SM_4
Fault detection time	Refer to CPU_SM_4
Addressed fault model	Refer to CPU_SM_4
Dependency on <i>Device</i> configuration	Refer to CPU_SM_4
Initialization	Refer to CPU_SM_4
Periodicity	Refer to CPU_SM_4
Test for the diagnostic	Refer to CPU_SM_4
Multiple-fault protection	Refer to CPU_SM_4
Recommendations and known limitations	Refer to CPU_SM_4

Table 19. RAM_SM_3

SM CODE	RAM_SM_3
Description	Information redundancy for safety-related variables in the <i>Application software</i>
Ownership	<i>End user</i>
Detailed implementation	<p>To address transient faults affecting the SRAM controller and memory cells, it is required to implement information redundancy on the safety-related system variables stored in the SRAM.</p> <p>The guidelines for the implementation of this method are the following:</p> <ul style="list-style-type: none"> • The system variables that are safety-related (in the sense that a wrong value due to a failure in reading on the RAM affects the safety functions) are well-identified and documented. • The arithmetic computation or decision based on such variables are executed twice and the two final results are compared. • Safety-related variables are stored and updated in two redundant locations, and comparison is checked before consuming data. • Enumerated fields must use non-trivial values, checked for coherence with the same frequency as for periodically executed diagnostics (see ⁽¹⁾ in Section 3.6: Hardware and software diagnostics). • Data vectors stored in SRAM must be protected by an encoding checksum (such as CRC).
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>Implementation of this safety method shows a partial overlap with an already foreseen method for Arm® Cortex®-M7 (CPU_SM_2) ; optimizations in implementing both methods are therefore possible.</p> <p>Reduction to the application scope for this method is achieved by executing an accurate safety analysis of the software. Refer to [4] for details. However, the scope reduction may not be possible nor desirable.</p>

Table 20. RAM_SM_4

SM CODE	RAM_SM_4
Description	Control flow monitoring in <i>Application software</i>
Ownership	<i>End user</i>
Detailed implementation	In case <i>End user Application software</i> is executed from SRAM, permanent and transient faults affecting the memory (cells and address decoder) can interfere with the program execution. The implementation of this method is required to address such failures. For more details on the implementation, refer to CPU_SM_1 description.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation. Higher value is fixed by watchdog timeout interval.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Needed only in case of <i>Application software</i> execution from SRAM. CPU_SM_1 correct implementation supersedes this requirement.

Table 21. RAM_SM_5

SM CODE	RAM_SM_5
Description	Periodic integrity test for <i>Application software</i> in RAM
Ownership	<i>End user</i>
Detailed implementation	In case <i>Application software</i> or diagnostic libraries are executed in RAM, it is needed to protect the integrity of the code itself against soft-error corruptions and related code mutations. This method must check the integrity of the stored code by checksum computation techniques, on a periodic basis. For implementation details, refer to similar method FLASH_SM_0.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Self-diagnostic capabilities can be embedded in the software, according to the test implementation design strategy chosen.
Multiple-fault protection	CPU_SM_0: Periodic core self-test software CPU_SM_1: Control flow monitoring in <i>Application software</i>
Recommendations and known limitations	

Table 22. RAM_SM_6

SM CODE	RAM_SM_6
Description	Read protection (RDP) and write protection (WRP)
Ownership	ST
Detailed implementation	SRAM can be protected against illegal reads or erase/write by using these protection features. The combination of these techniques and the related different protection level allows <i>End user</i> to build an effective access protection policy.
Error reporting	Refer to functional documentation - in some cases a HardFault error is generated.
Fault detection time	Refer to functional documentation
Addressed fault model	Systematic
Dependency on <i>Device</i> configuration	Not applicable
Initialization	Not required
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	Not required
Recommendations and known limitations	Hardware random-failure detection capability for SRAM2 access policy is restricted to well-selected marginal failure modes, mainly affecting program counter and SRAM2 interface functions. The associated diagnostic coverage is therefore expected to be irrelevant in the framework of STM32H7Rx/7Sx safety concept.

Table 23. RAM_SM_7

SM CODE	RAM_SM_7
Description	ECC on SRAM
Ownership	ST
Detailed implementation	Internal SRAM is protected by an ECC (error correction code) redundancy implementing a protection feature at 32-bit word and 64-bit word level: <ul style="list-style-type: none"> one-bit fault: correction two-bit fault: detection
Error reporting	Refer to functional documentation
Fault detection time	ECC bits are checked during a memory reading.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	None
Periodicity	Continuous
Test for the diagnostic	RAM_SM_10: Software for ECC diagnostic on RAM
Multiple-fault protection	<ul style="list-style-type: none"> RAM_SM_0: Periodic software test for static random access memory (SRAM) RAM_SM_5: Periodic integrity test for application software in RAM DIAG_SM_0: Periodic read-back of hardware diagnostics configuration registers
Recommendations and known limitations	<p>Note that because the ECC is checked during memory reads, RAM locations occupied by the safety related data which are rarely accessed (for instance, variables and/or code related to failures/errors management) are potentially exposed to the risk of error accumulation. In such a case, it is recommended to periodically check those locations by a memory scrubbing (by simply reading memory to reveal error correction or detection).</p> <p>The single error correction performed by the ECC is done just on the data read from the memory, but the value stored in the memory cells is not automatically corrected. To completely remove the error, a rewrite on the memory location with correct data is needed.</p>

Table 24. RAM_SM_8

SM CODE	RAM_SM_8
Description	Periodic test by software for SRAM address decoder
Ownership	<i>End user</i> or ST
Detailed implementation	Permanent faults affecting the SRAM interfaces address decoder are addressed through a dedicated software test that checks the memory cells contents versus the expected value.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	SRAM size depends on the part number
Initialization	Not required
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Overlaps with RAM_SM_0 implementation are possible.

Table 25. RAM_SM_10

SM CODE	RAM_SM_10
Description	Software for ECC diagnostic on RAM
Ownership	<i>End user</i>
Detailed implementation	This method tests by software the capability of the ECC on RAM (RAM_SM_7) to correct and report RAM single failures detect, and to detect and report dual failures in the same RAM word.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>Startup execution of this safety mechanism is recommended for multiple fault mitigations - refer to Section 4.1.3: Notes on multiple-fault scenario.</p> <p>The test can be implemented by reading data patterns including 1 bit error or 2 bit errors and by verifying the correct correction/detection by the ECC handler. Data patterns can be prepared by using the ECC disable option, allowing the storage of the desired patterns in RAM; a further activation of the ECC allows the execution of the tests.</p> <p>Note:</p> <ul style="list-style-type: none"> • <i>use two different memory address for correction and detection tests</i> • <i>the expected data read from test locations (corrected or with the error) must be verified</i> • <i>test procedure must include the verification of the correct reporting for memory failing address in related register</i> • <i>test procedure must include the verification of the correct interrupt generation</i>

3.6.4 Embedded flash memory

The device embedded flash memory includes an area for end user program and data, and an area from which the device can boot securely (but not available for user code). Not all the safety mechanisms described in this subsection apply to both areas. Refer to document [1] to understand safety mechanisms' role.

Table 26. FLASH_SM_0

SM CODE	FLASH_SM_0
Description	Periodic software test for flash memory
Ownership	<i>End user</i>
Detailed implementation	<p>Permanent faults affecting the system flash memory, memory cells, and address decoder are addressed through a dedicated software test that checks the memory cells contents versus the expected value, using signature-based techniques. According to IEC 61508-2 Table A.5, the effective diagnostic coverage of such techniques depends on the width of the signature in relation to the block length of the information to be protected - therefore the signature computation method is to be carefully selected. Note that the simple signature method (IEC 61508-7 - A.4.2 modified checksum) is inadequate as it only achieves a low value of coverage.</p> <p>The information block does not need to be addressed with this test as it is not used during normal operation (no data or program fetch).</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	Flash memory size changes according to the part number.
Initialization	Memory signatures must be stored in flash memory as well.
Periodicity	Periodic
Test for the diagnostic	Self-diagnostic capabilities can be embedded in the software, according to the test implementation design strategy chosen.
Multiple-fault protection	CPU_SM_0: Periodic core self-test software CPU_SM_1: Control flow monitoring in Application software
Recommendations and known limitations	<p>This test is expected to have a relevant time duration—test integration must therefore consider the impact on <i>Application software</i> execution.</p> <p>The use of internal cyclic redundancy check (CRC) module is recommended. In principle direct memory access (DMA) feature for data transfer can be used.</p> <p>Unused flash memory sections can be excluded from testing.</p> <p>Startup execution of this safety mechanism is recommended for multiple fault mitigations - refer to Section 4.1.3: Notes on multiple-fault scenario for details.</p>

Table 27. FLASH_SM_1

SM CODE	FLASH_SM_1
Description	Control flow monitoring in <i>Application software</i>
Ownership	<i>End user</i>
Detailed implementation	<p>Permanent and transient faults affecting the system flash memory, memory cells and address decoder, can interfere with the access operation by the <i>CPU</i>, leading to wrong data or instruction fetches.</p> <p>Such failures can be detected by control flow monitoring techniques implemented in <i>Application software</i> loaded from flash memory.</p> <p>For more details on the implementation, refer to description CPU_SM_1.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation. Higher value is fixed by watchdog timeout interval.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	CPU_SM_1 correct implementation supersedes this requirement.

Table 28. FLASH_SM_2

SM CODE	FLASH_SM_2
Description	Arm®Cortex®-M7 HardFault exceptions
Ownership	ST
Detailed implementation	<p>Hardware random faults (both permanent and transient) affecting system flash memory (memory cells, address decoder) can lead to wrong instruction codes fetches, and eventually to the intervention of the Arm®Cortex®-M7 HardFault exceptions. Refer to CPU_SM_3 for detailed description.</p>
Error reporting	Refer to CPU_SM_3
Fault detection time	Refer to CPU_SM_3
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Refer to CPU_SM_3
Periodicity	Continuous
Test for the diagnostic	Refer to CPU_SM_3
Multiple-fault protection	Refer to CPU_SM_3
Recommendations and known limitations	Refer to CPU_SM_3

Table 29. FLASH_SM_3

SM CODE	FLASH_SM_3
Description	Option byte write protection
Ownership	ST
Detailed implementation	This safety mechanism prevents unintended writes of the option byte. The use of this method is encouraged to enhance the end application robustness with respect to systematic faults.
Error reporting	Write protection exception
Fault detection time	Not applicable
Addressed fault model	None (systematic only)
Dependency on <i>Device</i> configuration	None
Initialization	Not required (enabled by default)
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This method addresses systematic faults in software applications. It is inefficient for hardware random faults affecting the option byte value in run time. No <i>DC</i> value is therefore associated.

Table 30. FLASH_SM_4

SM CODE	FLASH_SM_4
Description	Static data encapsulation
Ownership	<i>End user</i>
Detailed implementation	If static data are stored in flash memory, encapsulation by a checksum field with encoding capability (such as <i>CRC</i>) must be implemented. Checksum validity is checked by <i>Application software</i> before static data consuming.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

Table 31. FLASH_SM_6

SM CODE	FLASH_SM_6
Description	Flash memory unused area-filling code
Ownership	End user
Detailed implementation	Unused flash memory area must be filled with deterministic data. This way in case that the program counter jumps outside the application program area due to a transient fault affecting CPU, the system evolves in a deterministic way.
Error reporting	Not applicable
Fault detection time	Not applicable
Addressed fault model	None (fault avoidance)
Dependency on Device configuration	None
Initialization	Not applicable
Periodicity	Not applicable
Test for the diagnostic	Not applicable
Multiple-fault protection	Not applicable
Recommendations and known limitations	Filling code can be made of NOP instructions, or an illegal code that leads to a HardFault exception raise.

Table 32. FLASH_SM_7

SM CODE	FLASH_SM_7
Description	ECC on flash memory
Ownership	ST
Detailed implementation	Internal Flash memory is protected by ECC (error correction code) redundancy, implementing a protection feature at 128-bit word level (using 9 ECC bits): <ul style="list-style-type: none"> one-bit fault: correction two-bit fault: detection
Error reporting	Single error correction and double error detection are signaled to the application software by related flags in the flash register, and possibly by interrupt raise. Refer to the functional documentation (Reference Manual) for details.
Fault detection time	ECC bits are checked during a memory reading.
Addressed fault model	Permanent/transient
Dependency on Device configuration	None
Initialization	None
Periodicity	Continuous
Test for the diagnostic	Direct test procedure for ECC efficiency is not available. ECC run-time hardware failures leading to disabling the diagnostic, or leading to wrong corrections, fall into multiple-fault scenario, from IEC 61508 perspective. Related failures are adequately mitigated by the combination of safety mechanisms reported in this table, field <i>Multiple-fault protection</i> . Refer to [1] for details on ECC failure mitigation strategy.
Multiple-fault protection	FLASH_SM_0: Periodic software test for flash memory DIAG_SM_0: Periodic read-back of hardware diagnostics configuration registers CPU_SM_3: Arm®Cortex®-M7 HardFault exceptions
Recommendations and known limitations	Enabling related interrupt generation on the detection of errors is highly recommended.

Table 33. FLASH_SM_8

SM CODE	FLASH_SM_8
Description	Read protection (RDP), write protection (WRP), and proprietary code readout protection (PCROP)
Ownership	ST
Detailed implementation	Flash memory can be protected against illegal read or erase/write accesses by using these protection features. The combination of these techniques and the related different protection levels allows <i>End user</i> to build an effective access protection policy.
Error reporting	Refer to functional documentation. In some cases, a HardFault error is generated.
Fault detection time	Refer to functional documentation.
Addressed fault model	Systematic
Dependency on <i>Device</i> configuration	None
Initialization	Not required
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	Not required
Recommendations and known limitations	Hardware random-failure detection capability for Flash memory access policy is restricted to well-selected marginal failure modes, mainly affecting program counter and Flash memory interface functions. The associated diagnostic coverage is therefore expected to be irrelevant in the framework of STM32H7Rx/7Sx safety concept.

Table 34. FLASH_SM_9

SM CODE	FLASH_SM_9
Description	Periodic test by software for flash memory address decoder
Ownership	<i>End user</i>
Detailed implementation	Permanent faults affecting the system flash memory interface address decoder are addressed through a dedicated software test that checks the memory cells contents versus the expected value.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	flash memory size depends on part number.
Initialization	Not required
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Overlaps with FLASH_SM_0 implementation are possible.

3.6.5 External flash memory

Note: This section describes the possible set of safety mechanisms applicable to external flash memories connected to STM32H7Rx/Sx through FSMC or OCTOSPI ports and including safety-related executable code and/or data.

Table 35. EXTMEM_SM_0

SM CODE	EXTMEM_SM_0
Description	Periodic software test external for flash memory
Ownership	<i>End user</i>
Detailed implementation	Permanent faults affecting the external flash memory, memory cells, and its internal address decoder are addressed through a dedicated software test that checks the memory cells contents versus the expected value, using signature-based techniques. According to IEC 61508-2 Table A.5, the effective diagnostic coverage of such techniques depends on the width of the signature in relation to the block length of the information to be protected - therefore the signature computation method is to be carefully selected. Note that the simple signature method (IEC 61508-7 - A.4.2 Modified checksum) is inadequate as it only achieves a low value of coverage.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	Not applicable
Initialization	Memory signatures must be stored in flash memory as well.
Periodicity	Periodic
Test for the diagnostic	Self-diagnostic capabilities can be embedded in the software, according to the test implementation design strategy chosen.
Multiple-fault protection	CPU_SM_0: Periodic core self-test software CPU_SM_1: Control flow monitoring in Application software
Recommendations and known limitations	This test is expected to have a relevant time duration – test integration must therefore consider the impact on <i>Application software</i> execution. The use of internal CRC module is recommended. In principle DMA feature for data transfer can be used. Unused flash memory sections can be excluded from testing. Startup execution of this safety mechanism is recommended for multiple fault mitigations - refer to Section 4.1.3: Notes on multiple-fault scenario for details.

Table 36. EXTMEM_SM_1

SM CODE	EXTMEM_SM_1
Description	Control flow monitoring in <i>Application software</i>
Ownership	<i>End user</i>
Detailed implementation	Refer to FLASH_SM_1
Error reporting	Refer to FLASH_SM_1
Fault detection time	Refer to FLASH_SM_1.
Addressed fault model	Refer to FLASH_SM_1
Dependency on <i>Device</i> configuration	Refer to FLASH_SM_1
Initialization	Refer to FLASH_SM_1
Periodicity	Refer to FLASH_SM_1
Test for the diagnostic	Refer to FLASH_SM_1
Multiple-fault protection	Refer to FLASH_SM_1
Recommendations and known limitations	Refer to FLASH_SM_1

Table 37. EXTMEM_SM_2

SM CODE	EXTMEM_SM_2
Description	Arm®Cortex®-M7 HardFault exceptions
Ownership	ST
Detailed implementation	Hardware random faults (both permanent and transient) affecting external flash memory (memory cells, address decoder) can lead to wrong instruction codes fetches, and eventually to the intervention of the Arm®Cortex®-M7 HardFault exceptions. Refer to CPU_SM_3 for detailed description.
Error reporting	Refer to CPU_SM_3
Fault detection time	Refer to CPU_SM_3
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Refer to CPU_SM_3
Periodicity	Continuous
Test for the diagnostic	Refer to CPU_SM_3
Multiple-fault protection	Refer to CPU_SM_3
Recommendations and known limitations	Refer to CPU_SM_3

Table 38. EXTMEM_SM_4

SM CODE	EXTMEM_SM_4
Description	Static data encapsulation
Ownership	<i>End user</i>
Detailed implementation	Refer to FLASH_SM_4
Error reporting	Refer to FLASH_SM_4
Fault detection time	Refer to FLASH_SM_4
Addressed fault model	Refer to FLASH_SM_4
Dependency on <i>Device</i> configuration	Refer to FLASH_SM_4
Initialization	Refer to FLASH_SM_4
Periodicity	Refer to FLASH_SM_4
Test for the diagnostic	Refer to FLASH_SM_4
Multiple-fault protection	Refer to FLASH_SM_4
Recommendations and known limitations	Refer to FLASH_SM_4

Table 39. EXTMEM_SM_6

SM CODE	EXTMEM_SM_6
Description	Flash memory unused area filling code
Ownership	<i>End user</i>
Detailed implementation	Refer to FLASH_SM_6
Error reporting	Refer to FLASH_SM_6
Fault detection time	Refer to FLASH_SM_6
Addressed fault model	Refer to FLASH_SM_6
Dependency on <i>Device</i> configuration	Refer to FLASH_SM_6
Initialization	Refer to FLASH_SM_6
Periodicity	Refer to FLASH_SM_6
Test for the diagnostic	Refer to FLASH_SM_6
Multiple-fault protection	Refer to FLASH_SM_6
Recommendations and known limitations	Refer to FLASH_SM_6

Table 40. EXTMEM_SM_9

SM CODE	EXTMEM_SM_9
Description	Periodic test by software for flash memory address decoder
Ownership	<i>End user</i>
Detailed implementation	Permanent faults affecting the system external flash memory interface address decoder are addressed through a dedicated software test that checks the memory cells contents versus the expected value.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	Not applicable
Initialization	Not required
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Overlaps with EXTMEM_SM_0 implementation are possible.

3.6.6 Memory cipher engine (MCE)

Table 41. MCE_SM_0

SM CODE	MCE_SM_0
Description	Periodic read-back of MCE configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to MCE configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 42. MCE_SM_1

SM CODE	MCE_SM_1
Description	MCE encryption/decryption collateral detection
Ownership	ST
Detailed implementation	Decryption operations performed by MCE module are composed by several data manipulations and checks, with different level of complexity according to the selected chaining algorithm. Part of the hardware random failures affecting MCE module leads to the raise of error flags.
Error reporting	Several error conditions are possible, check functional documentation.
Fault detection time	Depends on peripheral configuration. Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Dependency on Device configuration
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	MCE_SM_2: Arm®Cortex®-M7 HardFault exceptions
Recommendations and known limitations	None

Table 43. MCE_SM_2

SM CODE	MCE_SM_1
Description	Arm®Cortex®-M7 HardFault exceptions
Ownership	ST
Detailed implementation	Permanent and transient faults affecting the MCE logic and registers may lead to application software or firmware decryption errors and, therefore, to the execution of incorrect instruction codes, and eventually to the intervention of the Arm®Cortex®-M7 HardFault exceptions. Refer to CPU_SM_3 for detailed description.
Error reporting	Refer to CPU_SM_3
Fault detection time	Refer to CPU_SM_3
Addressed fault model	Refer to CPU_SM_3
Dependency on <i>Device</i> configuration	Refer to CPU_SM_3
Initialization	Refer to CPU_SM_3
Periodicity	Refer to CPU_SM_3
Test for the diagnostic	Refer to CPU_SM_3
Multiple-fault protection	Refer to CPU_SM_3
Recommendations and known limitations	This method is efficient only when MCE is used for executable code decryption.

3.6.7 Power controller (PWR)

Table 44. VSUP_SM_0

SM CODE	VSUP_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 45. VSUP_SM_1

SM CODE	VSUP_SM_1
Description	Supply voltage internal monitoring (PVD)
Ownership	ST
Detailed implementation	The device features an embedded programmable voltage detector (PVD) that monitors the V_{DD} power supply and compares it to the V_{PVD} threshold. An interrupt can be generated when V_{DD} drops below the V_{PVD} threshold or when V_{DD} is higher than the V_{PVD} threshold.
Error reporting	Interrupt event generation
Fault detection time	Depends on threshold programming. Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Protection enable by the PVDE bit and the threshold setting in the Power control register (PWR_CR)
Periodicity	Continuous
Test for the diagnostic	Direct test procedure for PVD efficiency is not available. PVD run-time hardware failures leading to disabling such protection fall into multiple-fault scenario, from IEC 61508 perspective. Related failures are adequately mitigated by the combination of safety mechanisms reported in this table, field <i>Multiple-fault protection</i> .
Multiple-fault protection	DIAG_SM_0: Periodic read-back of hardware diagnostics configuration registers
Recommendations and known limitations	Internal monitoring PVD has limited capability to address failures affecting STM32H7Rx/7Sx internal voltage regulator. Refer to [1] for details. In case the hardware option is not available on the chosen partnumbers, its contribution to the overall safety concept is supported by other overlapping methods indicated for the mitigation of failures affecting internal power.

Table 46. VSUP_SM_2

SM CODE	VSUP_SM_2
Description	Independent watchdog
Ownership	ST
Detailed implementation	Failures in the power supplies for digital logic (core or peripherals) may lead to alteration of <i>Application software</i> timing, which can be detected by IWDG as safety mechanism introduced to monitor the <i>Application software</i> control flow. Refer to CPU_SM_1 and CPU_SM_6 for further information.
Error reporting	Reset signal generation
Fault detection time	Depends on implementation (watchdog timeout interval)
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	IWDG activation. It is recommended to use <i>Hardware watchdog</i> in Option byte settings (IWDG is automatically enabled after reset).
Periodicity	Continuous
Test for the diagnostic	Refer to CPU_SM_6.
Multiple-fault protection	CPU_SM_1: Control flow monitoring in Application software
Recommendations and known limitations	In specific part numbers, IWDG can be fed by a power supply independent from the one used for CPU core and main peripherals. Such diversity helps to increase the protection guaranteed by IWDG from main power supply anomalies. The adoption of an external watchdog (refer to CPU_SM_5) adds further diversity.

Table 47. VSUP_SM_3

SM CODE	VSUP_SM_3
Description	Internal temperature sensor check
Ownership	<i>End user</i>
Detailed implementation	The internal temperature sensor must be periodically tested in order to detect abnormal increase of the die temperature – hardware faults in supply voltage system may cause excessive power consumption and consequent temperature rise.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	None
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This method also mitigates the probability of common-cause failure due to excessive temperature, affecting the <i>Device</i> . Refer to the <i>Device</i> datasheet to set the threshold temperature.

Table 48. VSUP_SM_5

SM CODE	VSUP_SM_5
Description	System-level power supply management
Ownership	<i>End user</i>
Detailed implementation	This method is implemented at system level in order to guarantee the stability of power supply value over time. It can include a combination of different overlapped solutions, some listed here below (but not limited to): <ul style="list-style-type: none"> • additional voltage monitoring by external components • passive electronics devices able to mitigate overvoltage • specific design of power regulator in order to avoid power supply disturbance in presence of a single failure
Error reporting	Depends on implementation
Fault detection time	Fault avoidance
Addressed fault model	None
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	Not applicable
Recommendations and known limitations	Usually, this method is already required/implemented to guarantee the stability of each component of the final electronic board.

3.6.8 Reset and clock controller (RCC)

Table 49. CLK_SM_0

SM CODE	CLK_SM_0
Description	Periodic read-back of configuration registers
Ownership	End user
Detailed implementation	This method must be applied to configuration registers for clock and reset system (refer to RCC register map). Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 50. CLK_SM_1

SM CODE	CLK_SM_1
Description	Clock security system (CSS)
Ownership	ST
Detailed implementation	The clock security system (CSS) detects the loss of high-speed external (HSE) oscillator clock activity and executes the corresponding recovery action, such as: <ul style="list-style-type: none"> switch-off HSE commutation on the HSI generation of related NMI
Error reporting	NMI
Fault detection time	Depends on implementation (clock frequency value)
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	CSS protection must be enabled through Clock interrupt register (RCC_CIR) after boot.
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_5: External watchdog CLK_SM_0: Periodic read-back of configuration registers
Recommendations and known limitations	It is recommended to carefully read reference manual instruction on NMI generation, in order to correctly managing the faulty situation by <i>Application software</i> . As the test of the diagnostic is not available in the hardware, it must be done at system level during startup or maintenance period. The use of this method to implement fail operational schemes is not recommended.

Table 51. CLK_SM_2

SM CODE	CLK_SM_2
Description	Independent watchdog
Ownership	ST
Detailed implementation	The independent watchdog IWDG is able to detect failures in internal main <i>MCU</i> clock (lower frequency).
Error reporting	Reset signal generation
Fault detection time	Depends on implementation (watchdog timeout interval)
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	IWDG activation. It is recommended to use the <i>hardware watchdog</i> in Option byte settings (IWDG is automatically enabled after reset).
Periodicity	Continuous
Test for the diagnostic	Refer to CPU_SM_6.
Multiple-fault protection	CPU_SM_1: Control flow monitoring in Application software
Recommendations and known limitations	The adoption of an external watchdog (refer to CPU_SM_5) adds further diversity.

Table 52. CLK_SM_3

SM CODE	CLK_SM_3
Description	Internal clock cross-measurement
Ownership	<i>End user</i>
Detailed implementation	This method is implemented using general-purpose timers capabilities to be fed by the 32 KHz RTC clock or an external clock source (if available). Timer counter progress is compared with another counter (fed by internal clock). Abnormal values of oscillator frequency can therefore be detected.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_1: Control flow monitoring in Application software CPU_SM_5: External watchdog
Recommendations and known limitations	Efficiency versus transient faults is negligible. It provides only medium efficiency in permanent clock-related failure mode coverage.

3.6.9 System configuration, boot, and security (SBS)

SBS failures are addressed by the combination of methods indicated in CoU_10.1 and CoU_10.2 (refer to [Section 3.7: Conditions of use](#)).

3.6.10 Clock recovery system (CRS)

No safety mechanisms are defined for CRS because of the consequences of CoU_8 (refer to [Section 3.7: Conditions of use](#)). CRS deactivation is guaranteed by [Section 3.6.57: Disable and periodic cross-check of unintentional activation of unused peripherals](#).

3.6.11 General-purpose input/output (GPIO)

Table 53. GPIO_SM_0

SM CODE	GPIO_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to GPIO configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	GPIO availability can differ according to part number
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	The execution of the method before any update on GPIO registers helps to mitigate the possibility of unintended glitches on outputs due to soft errors. For more information refer to [4].

Table 54. GPIO_SM_1

SM CODE	GPIO_SM_1
Description	1002 for input GPIO lines
Ownership	<i>End user</i>
Detailed implementation	This method addresses GPIO lines used as inputs. Implementation is done by connecting the external safety-related signal to two independent GPIO lines. Comparison between the two GPIO values is executed by the <i>Application software</i> each time the signal is used to affect <i>Application software</i> behavior. This method applies to the single GPIO line used as input.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Permanent/transient
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>To reduce the potential impact of common cause failure, it is recommended to use GPIO lines:</p> <ul style="list-style-type: none"> • belonging to different I/O ports (for instance port A and B) • with different bit port number (for instance PA1 and PB5) • mapped to non-adjacent pins on the device package <p>As GPIO pins are shared with other <i>MCU</i> functions, this method must not be applied to pin connections already used by another peripheral and addressed by related safety mechanisms.</p>

Table 55. GPIO_SM_2

SM CODE	GPIO_SM_2
Description	Loopback scheme for output GPIO lines
Ownership	End user
Detailed implementation	This method addresses GPIO lines used as outputs. Implementation is done by a loopback scheme, connecting the output to a different GPIO line programmed as input and by using the input line to check the expected value on output port. Comparison is executed by the <i>Application software</i> periodically and each time output is updated. This method applies to the single GPIO line used as output.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>To reduce the potential impact of common cause failure, it is recommended to use GPIO lines:</p> <ul style="list-style-type: none"> • belonging to different I/O ports (for instance port A and B) • with different bit port number (for instance PA1 and PB5) • mapped to non-adjacent pins on the device package <p>Efficiency versus transient failures is linked to final application characteristics. We define as T_m the minimum duration of GPIO output wrong signal permanence required to violate the related safety function(s). Efficiency is maximized when execution test frequency is higher than $1/T_m$.</p> <p>As GPIO pins are shared with other <i>MCU</i> functions, this method must not be applied to pin connections already used by another peripheral and addressed by related safety mechanisms.</p>

Table 56. GPIO_SM_3

SM CODE	GPIO_SM_3
Description	GPIO port configuration lock register
Ownership	ST
Detailed implementation	<p>This safety mechanism prevents configuration changes for GPIO registers; it addresses therefore systematic faults in software application.</p> <p>The use of this method is encouraged to enhance the end-application robustness for systematic faults.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	None (Systematic only)
Dependency on <i>Device</i> configuration	None
Initialization	<i>Application software</i> must apply a correct locking write sequence after writing the final GPIO configuration.
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	Not required
Recommendations and known limitations	This method does not address transient faults (soft errors) that can possibly cause bit-flips on GPIO registers at running time.

3.6.12 Debug system or peripheral control

Table 57. DBG_SM_0

SM CODE	DBG_SM_0
Description	Watchdog protection
Ownership	ST
Detailed implementation	The debug unintentional activation due to hardware random fault results in the massive disturbance of <i>CPU</i> operations, leading to an intervention of the independent watchdog or, alternatively, the other system watchdog WWDG or the external one (CPU_SM_5).
Error reporting	Reset signal generation
Fault detection time	Depends on implementation (watchdog timeout interval).
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Refer to CPU_SM_6.
Multiple-fault protection	CPU_SM_1: Control flow monitoring in Application software
Recommendations and known limitations	None

Table 58. LOCK_SM_0

SM CODE	LOCK_SM_0
Description	Lock mechanism for configuration options
Ownership	ST
Detailed implementation	The STM32H7Rx/7Sx devices feature spread protection to prevent unintended configuration changes for some peripherals and system registers. The spread protection mitigates the specific effects possibly caused by systematic faults in software application. The use of this method is encouraged to enhance the end application robustness to systematic faults.
Error reporting	Not generated (when locked, register overwrites are simply ignored).
Fault detection time	Not applicable
Addressed fault model	None (systematic only)
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	Not required
Recommendations and known limitations	No <i>DC</i> associated because this test addresses systematic faults.

3.6.13 System configuration controller (SYSCFG)

Table 59. SYSCFG_SM_0

SM CODE	SYSCFG_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to system configuration controller configuration registers. This method is strongly recommended to protect registers related to hardware diagnostics activation and error reporting chain related features. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	This method is mainly overlapped by several other configuration register read-backs required for other <i>MCU</i> peripherals. It is reported here for the sake of completeness.

Table 60. DIAG_SM_0

SM CODE	DIAG_SM_0
Description	Periodic read-back of hardware diagnostics configuration registers
Ownership	<i>End user</i>
Detailed implementation	In STM32H7Rx/7Sx, several hardware-based safety mechanisms are available (those with the <i>Ownership</i> field set to ST). This method must be applied to any configuration register related to diagnostic measure operations, including error reporting. <i>End user</i> must therefore individuate configuration registers related to: <ul style="list-style-type: none"> hardware diagnostic enable interrupt/NMI enable (if used for diagnostic error management)
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

3.6.14 General purpose and high-performance direct memory access controller (GPDMA, HPDMA)

Table 61. DMA_SM_0

SM CODE	DMA_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to <i>DMA</i> configuration register and channel address register. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 62. DMA_SM_1

SM CODE	DMA_SM_1
Description	Information redundancy on data packet transferred via <i>DMA</i>
Ownership	<i>End user</i>
Detailed implementation	This method is implemented by adding, to data packets transferred by <i>DMA</i> , a redundancy check (such as <i>CRC</i> check or similar one) with encoding capability. Full data packet redundancy would be an overkill. The checksum encoding capability must be robust enough to guarantee at least 90% probability of detection for a single bit flip in the data packet. Consistency of data packet must be checked by <i>Application software</i> before consuming data.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	To give an example about checksum encoding capability, using just a bit-by-bit addition is inappropriate.

Table 63. DMA_SM_2

SM CODE	DMA_SM_2
Description	Information redundancy by including sender or receiver identifier on data packet transferred via <i>DMA</i>
Ownership	<i>End user</i>
Detailed implementation	<p>This method helps to identify inside the MCU the source and the originator of the message exchanged by <i>DMA</i>.</p> <p>Implementation is realized by adding an additional field to protected message, with a coding convention for message type identification fixed at <i>Device</i> level. Guidelines for the identification fields are:</p> <ul style="list-style-type: none"> • Identification field value must be different for each possible couple of sender or receiver on <i>DMA</i> transactions. • Values chosen must be enumerated and non-trivial. • Coherence between the identification field value and the message type is checked by the <i>Application software</i> before consuming data. <p>This method, when implemented in combination with DMA_SM_4, makes available a kind of <i>virtual channel</i> between source and destinations entities.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

Table 64. DMA_SM_3

SM CODE	DMA_SM_3
Description	Periodic software test for <i>DMA</i>
Ownership	<i>End user</i>
Detailed implementation	<p>This method requires the periodic testing of the <i>DMA</i> basic functionality, implemented through a deterministic transfer of a data packet from one source to another (for example from memory to memory) and the checking of the correct transfer of the message on the target. Data packets are composed by non-trivial patterns (avoid the use of 0x0000, 0xFFFF values) and organized in order to allow the detection during the check of the following failures:</p> <ul style="list-style-type: none"> • incomplete packed transfer • errors in single transferred word • wrong order in packed transmitted data
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

Table 65. DMA_SM_4

SM CODE	DMA_SM_4
Description	DMA transaction awareness
Ownership	End user
Detailed implementation	<p>DMA transactions are non-deterministic by nature, because typically driven by external events like communication messages reception. Anyway, well-designed safety systems should keep much control as possible of events – refer for instance to IEC 61508-3 Table 2 item 13 requirements for software architecture.</p> <p>This method is based on system knowledge of frequency and type of expected DMA transaction. For instance, an externally connected sensor supposed to send periodically some messages to a STM32 peripheral. Monitoring DMA transaction by a dedicated state machine allows the detection of missing or unexpected DMA activities.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on Device configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Because DMA transaction termination is often linked to an interrupt generation, implementation of this method can be merged with the safety mechanism NVIC_SM_1: Expected and unexpected interrupt check.

3.6.15 Chrom-Art Accelerator controller (DMA2D)

Table 66. DMA2D_SM_0

SM CODE	DMA2D_SM_0
Description	Periodic read-back of configuration registers
Ownership	End user
Detailed implementation	<p>This method must be applied to DMA2D configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI).</p>
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on Device configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 67. DMA2D_SM_1

SM CODE	DMA2D_SM_1
Description	Periodic software test for DMA2D functions
Ownership	<i>End user</i>
Detailed implementation	<p>This method requires the periodic testing of the DMA2D basic functionality, implemented through a deterministic transfer and processing of a set of <i>test images</i> from memory to memory and the checking of the correct execution (output image must be generated as per specifications). Output image correctness can be performed by fast methods like CRC fingerprint computation.</p> <p>Test definition must be able to cover following DMA2D basic functions:</p> <ul style="list-style-type: none"> • full image copy • image filling with a specific color • copy of part of the image • pixel format conversion • blending of two different images <p>Achieved diagnostic coverage on the module depends on the quantity and variance of tests performed.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	In principle, DMA2D basic functions not used in the safety application can be excluded from this test suite implementation.

Table 68. DMA2D_SM_2

SM CODE	DMA2D_SM_2
Description	DMA processing and interrupt awareness
Ownership	<i>End user</i>
Detailed implementation	<p>This method is based on system knowledge of frequency and type of DMA2D transaction expected. In general, image processing systems are based on a deterministic timing for image framing arrival and processing.</p> <p>Therefore, this method requires to monitor the expected execution of image processing and, in case interrupt generation is used, their correct timing and sequence.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Implementation of this method can be merged with the safety mechanism NVIC_SM_1: Expected and unexpected interrupt check

Note: *If image processing performed by DMA2D is used for the implementation of a safety function, system level considerations (as consistency checks on objects recognition results) may guarantee additional diagnostic coverage. Similarly, system level data redundancy schemes (as for instance algorithms based on processing for sequences of multiple image frames) may result in a relevant derating for transient failure rate.*

3.6.16 Chrom-GRC™ , Neo-Chrom graphic processor, ICACHE (GFXMMU, GPU2D)

Table 69. GFX_SM_0

SM CODE	GFX_SM_0
Description	Periodic read-back of GFXMMU, GPU2D, ICACHE configuration registers
Ownership	End user
Detailed implementation	This method must be applied to DSI Host configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on Device configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Note: *If image processing performed by these peripherals is used for the implementation of a safety function, system level measures must guarantee the required additional diagnostic coverage.*

3.6.17 Extended interrupt and events controller (EXTI)

Table 70. NVIC_SM_0

SM CODE	NVIC_SM_0
Description	Periodic read-back of configuration registers
Ownership	End user
Detailed implementation	<p>This test is implemented by executing a periodic check of the configuration registers for a system peripheral against its expected value. Expected values are previously stored in RAM and adequately updated after each configuration change. The method mainly addresses transient faults affecting the configuration registers, by detecting bit flips in the registers contents. It addresses also permanent faults on registers because it is executed at least once per <i>PST</i> (or another timing constraint; refer to ⁽¹⁾ in Section 3.6: Hardware and software diagnostics) after an update of the peripheral.</p> <p>Method must be implemented to any configuration register whose contents are able to interfere with NVIC or EXTI behavior in case of incorrect settings. Check includes NVIC vector table.</p> <p>According to the state-of-the-art automotive safety standard ISO26262, this method can achieve high levels of diagnostic coverage (DC) (refer to ISO26262-5:2018, Table D.4).</p> <p>An alternative valid implementation requiring less space in SRAM can be realized on the basis of signature concept:</p> <ul style="list-style-type: none"> Peripheral registers to be checked are read in a row, computing a <i>CRC</i> checksum (use of hardware <i>CRC</i> is encouraged). Obtained signature is compared with the golden value (computed in the same way after each register update, and stored in SRAM). Coherence between signatures is checked by <i>Application software</i> – signature mismatch is considered as failure detection.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>This method addresses only failures affecting configuration registers, and not peripheral core logic or external interface.</p> <p>Attention must be paid to registers containing mixed combination of configuration and status bits. Mask must be used before saving register contents affecting signature, and related checks done, to avoid false positive detections.</p>

Table 71. NVIC_SM_1

SM CODE	NVIC_SM_1
Description	Expected and unexpected interrupt check
Ownership	End user
Detailed implementation	<p>According to IEC 61508-2 Table A.1 recommendations, a diagnostic measure for continuous, absence or cross-over of interrupt must be implemented. The method of expected and unexpected interrupt check is implemented at <i>Application software</i> level.</p> <p>The guidelines for the implementation of the method are the following:</p> <ul style="list-style-type: none"> • The interrupts implemented on the <i>MCU</i> are well documented, also reporting, when possible, the expected frequency of each request (for example, the interrupts related to ADC conversion completion that come on a regular basis). • Individual counters are maintained for each interrupt request served, in order to detect in a given time frame the cases of a) no interrupt at all b) too many interrupt requests. The control of the time frame duration must be regulated according to the individual interrupt expected frequency. • Interrupt vectors related to unused interrupt source point to a default handler that reports, in case of triggering, a faulty condition (unexpected interrupt). • In case an interrupt service routine is shared between different sources, a plausibility check on the caller identity is implemented. <p><i>Important:</i> <i>Interrupt requests generated by non-safety-related peripherals must be handled using the same method as all safety related interrupts outlined in the list above.</i></p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	The extension of the method to non-safety related peripherals (see last bullet in "Detailed implementation" box above) is introduced to mitigate interferences between non-safety and safety functions/hardware (FFI).

Table 72. NVIC_SM_2

SM CODE	NVIC_SM_2
Description	Interrupt vectors periodic check
Ownership	End user
Detailed implementation	<p>This method must be applied to periodically check the integrity of interrupt vector table contents.</p> <p>Test can be implemented either:</p> <ul style="list-style-type: none"> By checking interrupt table contents with a copy stored elsewhere (in the same memory hosting the table, or other one) or By calculating a CRC-like checksum on table contents and to compare with the expected result
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on Device configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This method can be overlapped by the implementation of FLASH_SM_0 or RAM_SM_5 depending on the memory (Flash or SRAM) where the vector table is stored.

3.6.18 Cyclic redundancy-check calculation unit (CRC)

Table 73. CRC_SM_0

SM CODE	CRC_SM_0
Description	CRC self-coverage
Ownership	ST
Detailed implementation	<p>The CRC algorithm implemented in this module (CRC-32 Ethernet polynomial: 0x4C11DB7) offers excellent features in terms of error detection in the message. Therefore permanent and transient faults affecting CRC computations are easily detected by any operations using the module to recompute an expected signature.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on Device configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

3.6.19 CORDIC co-processor (CORDIC)

Table 74. CORD_SM_0

SM CODE	CORD_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to CORDIC configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 75. CORD_SM_1

SM CODE	CORD_SM_1
Description	Periodic software test for CORDIC functions
Ownership	<i>End user</i>
Detailed implementation	This method requires the periodic testing of the CORDIC basic computation functionalities, implemented through a set of individual stress test. The software test must be built around well-known techniques already addressed by IEC 61508-7, A.3.2 (Self-test by software: walking bit one-channel). Achieved diagnostic coverage on the module depends on the quantity and variance of tests performed.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

Table 76. CORD_SM_2

SM CODE	CORD_SM_2
Description	CORDIC /Arm® Cortex®-M7 periodic reciprocal comparison by software
Ownership	<i>End user</i>
Detailed implementation	This method is based on the technique "Reciprocal comparison by software" (IEC 61508-7, A.3.5). The computations executed on CORDIC during <i>Application software</i> cycle are periodically executed by software implementation in Arm® Cortex®-M7 CPU, and results are compared. Being CPU integrity guaranteed by other safety mechanisms, any mismatch between results must be considered as a detection information for CORDIC failure(s).
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	None/On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	The implementation of this method is possible only when the DTI fixed at system for periodic tests level is compatible with the execution of the CORDIC computations on a slower processing unit (Cortex®-M7).

Table 77. CORD_SM_3

SM CODE	CORD_SM_3
Description	Double computation for CORDIC functions
Ownership	<i>End user</i>
Detailed implementation	A timing redundancy for safety-related computation performed by the CORDIC is considered to detect transient faults affecting the module itself. The requirement needs be applied only to safety-relevant computation, which in case of wrong result could interfere with the system safety functions.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

3.6.20 Filter math accelerator (FMAC)

Table 78. FMAC_SM_0

SM CODE	FMAC_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to FMAC configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 79. FMAC_SM_1

SM CODE	FMAC_SM_1
Description	Periodic software test for FMAC functions
Ownership	<i>End user</i>
Detailed implementation	This method requires the periodic testing of the FMAC basic computation and data management functionalities, implemented through a set of individual stress test. The software test must be built around well-known techniques already addressed by IEC 61508-7, A.3.2 (Self-test by software: walking bit one-channel). Achieved diagnostic coverage on the module depends on the quantity and variance of tests performed.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

Table 80. FMAC_SM_2

SM CODE	FMAC_SM_2
Description	FMAC/Arm Cortex-M7 periodic reciprocal comparison by software
Ownership	<i>End user</i>
Detailed implementation	This method is based on the technique "Reciprocal comparison by software" (IEC 61508-7, A.3.5). The computations executed on FMAC during <i>Application software</i> cycle are periodically executed by software implementation in Arm Cortex-M7 CPU, and results are compared. Being CPU integrity guaranteed by other safety mechanisms, any mismatch between results must be considered as a detection information for FMAC failure(s).
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic/On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	The implementation of this method is possible only when the DTI fixed at system for periodic tests level is compatible with the execution of the FMAC computations on a slower processing unit (Cortex-M7).

Table 81. FMAC_SM_3

SM CODE	FMAC_SM_3
Description	Double computation for FMAC functions
Ownership	<i>End user</i>
Detailed implementation	A timing redundancy for safety-related computation performed by the FMAC is considered to detect transient faults affecting the module itself. The requirement needs be applied only to safety-relevant computation, which in case of wrong result could interfere with the system safety functions.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

3.6.21 Flexible static memory controller (FSMC)

Table 82. FSMC_SM_0

SM CODE	FSMC_SM_0
Description	Control flow monitoring in <i>Application software</i>
Ownership	<i>End user</i>
Detailed implementation	<p>If FSMC is used to connect an external memory containing software code to be executed by the CPU, permanent and transient faults affecting the FSMC memory controller are able to interfere with the access operation by the CPU, leading to wrong data or instruction fetches. A strong control flow mechanism linked to a system watchdog is able to detect such failures, in case they interfere with the expected flow of <i>Application software</i>.</p> <p>The implementation of this method is identical to the one reported for CPU_SM_1, refer there for details.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation. Higher value is fixed by watchdog timeout interval.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	FSMC interface is available only on selected part numbers.
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This mechanism must only be used if FSMC external memory is used to store executable programs.

Table 83. FSMC_SM_1

SM CODE	FSMC_SM_1
Description	Information redundancy on external memory connected to FSMC
Ownership	<i>End user</i>
Detailed implementation	<p>If FSMC interface is used to connect an external memory where safety-relevant data are stored, information redundancy techniques for stored data are able to address faults affecting the FSMC interface. The possible techniques are:</p> <ul style="list-style-type: none"> • using redundant copies of safety-relevant data and performing coherence check before consuming • organizing data in arrays and computing the checksum field to check before use
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	FSMC interface is available only on selected part numbers.
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>This mechanism must be used just if FSMC external memory is used to store safety-related data.</p> <p>This safety mechanism can overlap with information redundancy techniques implemented at system level to address failure of physical device connected to FSMC port.</p>

Table 84. FSMC_SM_2

SM CODE	FSMC_SM_2
Description	Periodic read-back of FSMC configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to FSMC configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	FSMC interface is available only on selected part numbers.
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 85. FSMC_SM_3

SM CODE	FSMC_SM_3
Description	ECC engine on NAND interface in FSMC module
Ownership	ST
Detailed implementation	The FSMC NAND Card controller includes two error correction code computation hardware blocks, one per memory bank. They reduce the host CPU workload when processing the ECC by software. ECC mechanism protects data integrity on the external memory connected to NAND port.
Error reporting	Refer to functional documentation
Fault detection time	ECC bits are checked during memory reading.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	FSMC interface is available only on selected part numbers.
Initialization	None
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	FSMC_SM_2: Periodic read-back of FSMC configuration registers
Recommendations and known limitations	This method has negligible efficiency in detecting hardware random failures affecting the FSMC interface. It can be part of <i>End user</i> safety concept because addressing memories outside STM32H7Rx/7Sx MCU.

3.6.22 Octo-SPI interface (OCTOSPI)

Table 86. QSPI_SM_0

SM CODE	QSPI_SM_0
Description	Periodic read-back of OCTOSPI configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to OCTOSPI configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 87. QSPI_SM_1

SM CODE	QSPI_SM_1
Description	Protocol error signals including hardware CRC
Ownership	ST
Detailed implementation	OCTOSPI communication module embeds protocol error checks (like overrun, underrun, timeout and so on), conceived to detect communication-related abnormal conditions. These mechanisms are only able to detect a small fraction of hardware random failures affecting the module itself.
Error reporting	Error flag raise and optional interrupt event generation
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Direct test procedure for CRC efficiency is not available. CRC run-time hardware failures leading to disabling such protection fall into multiple-fault scenario, from IEC 61508 perspective. Related failures are adequately mitigated by the combination of safety mechanisms reported in this table, field <i>Multiple-fault protection</i> .
Multiple-fault protection	QSPI_SM_2: Information redundancy techniques on messages
Recommendations and known limitations	Enabling related interrupt generation on the detection of errors is highly recommended.

Table 88. QSPI_SM_2

SM CODE	QSPI_SM_2
Description	Information redundancy techniques on messages
Ownership	<i>End user</i>
Detailed implementation	<p>This method is implemented adding to data packets (not commands) transferred by OCTOSPI interface a redundancy check (like a CRC check, or similar one) with encoding capability. The checksum encoding capability must be robust enough to guarantee at least 90% probability of detection for a single bit flip in the data packet.</p> <p>Consistency of data packet must be checked by <i>Application software</i> before consuming data.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>To give an example on checksum encoding capability, using just a bit-by-bit addition is unappropriated.</p> <p>This safety mechanism can overlap with information redundancy techniques implemented at system level to address failure of physical device connected to OCTOSPI port.</p>

3.6.23 Delay block (DLYB)

Table 89. DLB_SM_0

SM CODE	DLB_SM_0
Description	Periodic read-back of DLYB configuration registers
Ownership	<i>End user</i>
Detailed implementation	<p>This method must be applied to DLYB configuration registers.</p> <p>Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI).</p>
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Note: *It is assumed that DLYB output, if used, supplies STM32H7Rx/Sx internal communication peripherals. It is also assumed that for the connected peripherals all recommended safety mechanisms (rated as ++ and +) are correctly implemented.*

3.6.24 Analog-to-digital converter (ADC)

Table 90. ADC_SM_0

SM CODE	ADC_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to the ADC configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 91. ADC_SM_1

SM CODE	ADC_SM_1
Description	Multiple acquisition by <i>Application software</i>
Ownership	<i>End user</i>
Detailed implementation	This method implements a timing information redundancy by executing multiple acquisitions on the same input signal. Multiple data acquisitions are then combined by a filter algorithm to determine the signal correct value.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Depends on implementation
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	It is highly probable that this recommendation is satisfied by design by the <i>End userApplication software</i> . Usage of multiple acquisitions followed by average operations is a common technique in industrial applications exposed to electromagnetic interference on sensor lines.

Table 92. ADC_SM_2

SM CODE	ADC_SM_2
Description	Range check by <i>Application software</i>
Ownership	<i>End user</i>
Detailed implementation	<p>The guidelines for the implementation of the method are the following:</p> <ul style="list-style-type: none"> The expected range of the data to be acquired are investigated and adequately documented. Note that in a well-designed application it is improbable that during normal operation an input signal has a very near or over the upper and lower rail limit (saturation in signal acquisition). If the <i>Application software</i> is aware of the state of the system, this information is to be used in the range check implementation. For example, if the ADC value is the measurement of a current through a power load, reading an abnormal value such as a current flowing in opposite direction versus the load supply may indicate a fault in the acquisition module. As the ADC module is shared between different possible external sources, the combination of plausibility checks on the different signals acquired can help to cover the whole input range in a very efficient way.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Depends on implementation
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	The implementation and the related diagnostic efficiency of this safety mechanism are strongly application-dependent.

Table 93. ADC_SM_3

SM CODE	ADC_SM_3
Description	Periodic software test for ADC
Ownership	<i>End user</i>
Detailed implementation	<p>The method is implemented acquiring multiple signals and comparing the read value with the expected one, supposed to be known. Method can be implemented with different level of complexity:</p> <ul style="list-style-type: none"> Basic complexity: acquisition and check of upper or lower rails used in conversion (for example, V_{DD} or V_{SS}) and internal reference voltage (for example V_{REFINT}) as intermediate value. High complexity: in addition to basic complexity tests, acquisition of a DAC output connected to ADC input and checking all voltage excursion and linearity
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>Documents [2] and [3] assume that the above <i>Basic complexity</i> method is implemented.</p> <p>The above <i>High complexity</i> method can be used to add a safety margin to the local safety concept for ADC, allowing to claim medium DC values for permanent failures (refer to IEC61508-2 (table A.3—Electronic components/Tests by redundant hardware)).</p>

Table 94. ADC_SM_4

SM CODE	ADC_SM_4
Description	1oo2 scheme for ADC inputs
Ownership	<i>End user</i>
Detailed implementation	This safety mechanism is implemented using two different SAR ADC channels belonging to separate ADC modules to acquire the same input signal. The <i>Application software</i> checks the coherence between the two readings.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	ADC_SM_0: Periodic read-back of configuration registers
Recommendations and known limitations	This method can be used in conjunction with ADC_SM_0 / ADC_SM_2 / ADC_SM_3 to achieve highest level of ADC module diagnostic coverage (if ADC_SM_4 is implemented, ADC_SM_2 and ADCV_SM_3 implementation can be limited to only one ADC used in the scheme).

3.6.25 Digital temperature sensor (DTS)

Table 95. DTS_SM_0

SM CODE	DTS_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to DTS configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Note: *The use of DTS for the implementation of safety functions where DTS may act as single point of failure is not recommended.*

3.6.26 Voltage reference buffer (VREFBUF)

Table 96. VREF_SM_0

SM CODE	VREF_SM_0
Description	Periodic read-back of VREFBUF system configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to VREFBUF configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Refer to NVIC_SM_0

Table 97. VREF_SM_1

SM CODE	VREF_SM_1
Description	VREF cross-check by ADC reading
Ownership	<i>End user</i>
Detailed implementation	This method is based on ADC acquisition for VREF generated signal, to crosscheck with the expected value.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Overlaps with ADC_SM_3 are possible.

3.6.27 Multi-function digital filter (MDF), Audio digital filter (ADF)

Table 98. MDF_SM_0

SM CODE	MDF_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to MDF/ADF configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 99. MDF_SM_1

SM CODE	MDF_SM_1
Description	1002 scheme for MDF/ADF module
Ownership	<i>End user</i>
Detailed implementation	This safety mechanism is implemented using two separated instances of digital filter conditioning chain (SITFx+DFLTx+RXFIFOx, SITFy+DFLTy+RXFIFOy) to process the same input data stream. The <i>Application software</i> checks periodically the coherence between the processed data.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation

SM CODE	MDF_SM_1
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	The MCU performance overload and the implementation complexity associated to this method can be relevant.

Table 100. MDF_SM_2

SM CODE	MDF_SM_2
Description	Plausibility check on inputs data stream
Ownership	<i>End user</i>
Detailed implementation	This method periodically checks the coherence of the contents of the data stream received with the expected one. The aim is to detect failures affecting the shared hardware not protected by the other relevant method MDF_SM_1, at least intercepting permanent failures leading a “no data” or “fixed data” conditions.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

3.6.28 Digital camera interface pixel pipeline (DCMIPP)

Table 101. DCMI_SM_0

SM CODE	DCMI_SM_0
Description	Periodic read-back of DCMI configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to DCMI configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	DCMI interface is available only on selected part numbers.
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 102. DCMI_SM_1

SM CODE	DCMI_SM_1
Description	DCMI video input data synchronization
Ownership	ST
Detailed implementation	According to the nature of video data stream received, DCMI module implements synchronization controls, from the simplest one (hardware synchronization) to the most complex (e.g. embedded data synchronization mode). DCMI internal failures leading to the incapability of correcting synchronizing the data stream can be therefore detected.
Error reporting	No explicit error signal/message generation is provided (*).
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	DCMI interface is available only on selected part numbers.
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	DCMI_SM_0: Periodic read-back of DCMI configuration registers
Recommendations and known limitations	(*) For its nature, the detection of an actual hardware failure by this safety mechanism can be confused with functional-related scenarios (e.g. camera device disconnected or powered-off). It is responsibility of <i>Application software</i> to discriminate, as far as it is technically possible, among different events.

3.6.29 Parallel synchronous slave interface (PSSI)

Table 103. PSSI_SM_0

SM CODE	PSSI_SM_0
Description	Periodic read-back of PSSI configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to PSSI configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 104. PSSI_SM_1

SM CODE	PSSI_SM_1
Description	Information redundancy techniques on data stream, including end-to-end protection
Ownership	<i>End user</i>
Detailed implementation	<p>This method aims to protect the datastream communication between a peripheral and its external counterpart establishing a kind of “protected” channel. The aim is to specifically address applicable communication failure modes as reported in IEC 61508-2, 7.4.11.1.</p> <p>Implementation guidelines are as follows:</p> <ul style="list-style-type: none"> Data must be protected by an information redundancy check, like for instance a CRC checksum computed each a specific number of data and added to the stream. Checksum encoding capability must be robust enough to guarantee at least 90% probability of detection for a single-bit flip in the protected data packet. The added CRC should be paired by a sequence incremental number, to allow receiver to exclude the repetition of the loss of entire sections of the stream. Timing monitoring of the data stream (data continuity) is recommended. <i>Application software</i> must verify above checks during data consumption and in any case with a frequency higher than PST. <p>In case PSSI module is used to operate message-based exchanges, the implementation guidelines reported in this manual for method UART_SM_3 should be applied.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	In case of bi-directional communications, it is assumed that the remote counterpart has an equivalent capability of performing the checks described.

3.6.30 LCD-TFT display controller (LTDC)

Table 105. LCD_SM_0

SM CODE	LCD_SM_0
Description	Periodic read-back of LTDC configuration registers and buffer memory
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to LTDC configuration registers and to the buffer memory. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 106. LCD_SM_1

SM CODE	LCD_SM_1
Description	LTDC acquisition by ADC channel
Ownership	<i>End user</i>
Detailed implementation	Correct generation of LTDC driving signals is checked by ADC reading versus expected values
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	None
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This method is conceived to mainly detect permanent failures affecting analog parts and therefore the execution on periodic way is acceptable. Diagnostic coverage achievable depends on the quantity of LTDC signals checked

Note: *The above-described safety mechanism addresses the LTDC interface included in STM32 MCUs. Because actual capability of correct image generation on LTDC is not addressed by this safety mechanism, in case such feature is considered safety relevant, End user is warned to evaluate the adoption of adequate system-level measures.*

3.6.31 JPEG codec (JPEG)

Table 107. JPEG_SM_0

SM CODE	JPEG_SM_0
Description	Periodic read-back of JPEG codec configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to JPEG codec configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple faults protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 108. JPEG_SM_1

SM CODE	JPEG_SM_1
Description	Periodic test for JPEG encoding/decoding functions
Ownership	<i>End user</i>
Detailed implementation	JPEG encoding/decoding functions performed by JPEG codec are tested by comparison, executing the functions over a set of reference images stored in the flash memory and checking the correctness of output images. The method diagnostic coverage depends on the quantity and composition of image set used for the checks. The comparison of output image with expected result can be executed bit-by-bit or even by faster methods like CRC-seed (computed via DMA transactions) checks.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	If only one kind of function between encoding and decoding is used by <i>Application software</i> , the method can be simplified restricting the test to the used function only.

Table 109. JPEG_SM_2

SM CODE	JPEG_SM_2
Description	Application-level detection of failures affecting JPEG coding/encoding
Ownership	<i>End user</i>
Detailed implementation	<p>Several application-level methods can be used to detect failures affecting JPEG coding/encoding; being no possible to give detailed information for its implementation, only high level guidelines/hints are provided:</p> <ul style="list-style-type: none"> Permanent and transient failures: <i>Application software</i> checks on expected output image characteristics (for example, after the processing by image recognition algorithms) Transient faults: <i>Application software</i> checks on images redundancy (in case of sequence coming from video stream) possibly discarding wrongly-processed frames. This rationale could be also used to derate a part of transient failure rate as <i>no effect</i>.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic/On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	These methods are strictly application-dependent; therefore, their implementation and any related claims in terms of failure mitigations are <i>End user's</i> responsibility.

Note: *The use of the DMA feature inside this module requires the adoption of the set of safety mechanism defined for the system DMA (refer to Section 3.6.14: General purpose and high-performance direct memory access controller (GPDMA, HPDMA)).*

3.6.32 HASH processor (HASH)

Table 110. HASH_SM_0

SM CODE	HASH_SM_0
Description	Periodic read-back of HASH configuration registers
Ownership	<i>End user</i>
Detailed implementation	<p>This method must be applied to HASH configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI).</p>
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	HASH module available only on specific part numbers
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 111. HASH_SM_1

SM CODE	HASH_SM_1
Description	HASH processing collateral detection
Ownership	ST
Detailed implementation	Message digest computation performed by HASH module is composed by several data manipulations and checks. A major part of the hardware random failures affecting HASH module leads to algorithm violations/errors, and so to decoding errors on the receiver side.
Error reporting	Several error condition can happens, check functional documentation.
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	HASH module available only on specific part numbers
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Direct test procedure for HASH efficiency is not available. HASH run-time hardware failures leading to disabling related collateral protection fall into multiple-fault scenario, from IEC 61508 perspective. Related failures are adequately mitigated by the combination of safety mechanisms reported in this table, field Multiple-fault protection.
Multiple-fault protection	HASH_SM_0: Periodic read-back of HASH configuration registers CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This detection capability can be used to implement software-based tests (by processing a predefined message and further checking the expected results) which can be executed periodically to early detect HASH failures before its use by application software.

Note: *Hardware random failures consequences on potential security features violations are **not** analyzed in this manual.*

3.6.33 On-the-fly decryption engine (OTFDEC)

Table 112. OTFDEC_SM_0

SM CODE	OTFDEC_SM_0
Description	Periodic read-back of OTFDEC configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to OTFDEC configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 113. OTFDEC_SM_1

SM CODE	OTFDEC_SM_1
Description	OTFDEC encryption/decryption collateral detection
Ownership	ST
Detailed implementation	Decryption operations performed by OTFDEC module are composed by several data manipulations and checks, with different level of complexity according to the selected chaining algorithm. Part of the hardware random failures affecting OTFDEC module leads to the raise of error flags.
Error reporting	Several error conditions can happen, check functional documentation.
Fault detection time	Depends on peripheral configuration. Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Dependency on <i>Device</i> configuration
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	OTFDEC_SM_2: Arm® Cortex®M7 HardFault exceptions OTFDEC_SM_3: Static data encapsulation
Recommendations and known limitations	None

Table 114. OTFDEC_SM_2

SM CODE	OTFDEC_SM_2
Description	Arm® Cortex®-M7 HardFault exceptions
Ownership	ST
Detailed implementation	Permanent and transient faults affecting the OTFDEC logic and registers may lead to application software or firmware decryption errors and so to the execution of incorrect instruction codes, and eventually to the intervention of the Arm® Cortex®M7 HardFault exceptions. Refer to CPU_SM_3 for detailed description.
Error reporting	Refer to CPU_SM_3
Fault detection time	Refer to CPU_SM_3
Addressed fault model	Refer to CPU_SM_3
Dependency on <i>Device</i> configuration	Refer to CPU_SM_3
Initialization	Refer to CPU_SM_3
Periodicity	Refer to CPU_SM_3
Test for the diagnostic	Refer to CPU_SM_3
Multiple-fault protection	Refer to CPU_SM_3
Recommendations and known limitations	This method is efficient only when OTFDEC is used for executable code decryption

Table 115. OTFDEC_SM_3

SM CODE	OTFDEC_SM_3
Description	Static data encapsulation
Ownership	<i>End user</i>
Detailed implementation	If static data stored in flash memory need to be decrypted by OTFDEC, then an encapsulation by a checksum field with encoding capability (such as CRC) must be implemented. Checksum validity is checked by Application software before static data consuming.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This method is efficient only when OTFDEC is used for data decryption

3.6.34 Public key accelerator (PKA)

Table 116. PKA_SM_0

SM CODE	PKA_SM_0
Description	Periodic read-back of PKA configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to PKA configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 117. PKA_SM_1

SM CODE	PKA_SM_1
Description	PKA key computation collateral detection
Ownership	ST
Detailed implementation	Key and/or signature computation performed by PKA module is composed by several data manipulations, with different level of complexity according to the selected algorithm. A large part of the hardware random failures affecting PKA module or its private RAM bank leads to wrong key/signature computation. As per CoU_9, security violations must be considered as non-controllable hardware random failures; accordingly, detection of a wrong key/signature must be considered as a valid hardware failure detection by the Application software.
Error reporting	Depends on peripheral configuration. Refer to functional documentation.
Fault detection time	Depends on peripheral configuration. Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

3.6.35 True random number generator (RNG)

Table 118. RNG_SM_0

SM CODE	RNG_SM_0
Description	Periodic read-back of RNG configuration register
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to RNG configuration register RNG_CR. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	RNG module available only on specific part numbers
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 119. RNG_SM_1

SM CODE	RNG_SM_1
Description	RNG module entropy on-line tests
Ownership	ST and <i>End user</i>
Detailed implementation	<p>RNG module include an internal diagnostic for the analog source entropy that can be used to detect failures on the module itself. Furthermore, the required test on generated random number difference between the previous one (as required by FIPS PUB 140-2) can be exploited as well.</p> <p>Implementation:</p> <ul style="list-style-type: none"> Check for RNG error conditions. Check the difference between generated random number and the previous one.
Error reporting	CEIS, SEIS error bits of the RNG status register (RNG_SR) <i>Application software</i> error for FIPS PUB 140-2 test fail
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	RNG module available only on specific part numbers
Initialization	Permanent/transient
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

3.6.36 Advanced encryption standard hardware accelerator/Secure AES coprocessor (AES/SAES)

Table 120. AES_SM_0

SM CODE	AES_SM_0
Description	Periodic read-back of AES configuration registers
Ownership	<i>End user</i>
Detailed implementation	<p>This method must be applied to AES configuration registers.</p> <p>Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI).</p>
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	AES module available only on specific part numbers
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 121. AES_SM_1

SM CODE	AES_SM_1
Description	Encryption/decryption collateral detection
Ownership	ST
Detailed implementation	Encryption and decryption operations performed by AES module are composed by several data manipulations and checks, with different level of complexity according to the selected chaining algorithm. A major part of the hardware random failures affecting AES module leads to algorithm violations/errors. Leading to decoding errors on the receiver side.
Error reporting	Several error conditions can happen, check functional documentation.
Fault detection time	Dependency on <i>Device</i> configuration
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	AES module available only on specific part numbers
Initialization	Dependency on <i>Device</i> configuration
Periodicity	Continuous
Test for the diagnostic	Direct test procedure for AES efficiency is not available. AES run-time hardware failures leading to disabling such protection fall into multiple-fault scenario, from IEC 61508 perspective. Related failures are adequately mitigated by the combination of safety mechanisms reported in this table, field <i>Multiple-fault protection</i> .
Multiple-fault protection	AES_SM_2: Information redundancy techniques on messages, including end-to-end protection
Recommendations and known limitations	This detection capability can be used to implement software-based tests (by processing a predefined message and further checking the expected results) which can be executed periodically to early detect AES failures before its use by application software.

Table 122. AES_SM_2

SM CODE	AES_SM_2
Description	Information redundancy techniques on messages, including end-to-end protection
Ownership	<i>End user</i>
Detailed implementation	This method aim to protect the communication between a peripheral and his external counterpart. It is used in AES local safety concept to address failures not detected by the encryption/decryption features. Refer to UART_SM_3 description for detailed information.
Error reporting	Refer to UART_SM_3
Fault detection time	Refer to UART_SM_3
Addressed fault model	Refer to UART_SM_3
Dependency on <i>Device</i> configuration	AES module available only on specific part numbers
Initialization	Refer to UART_SM_3
Periodicity	Refer to UART_SM_3
Test for the diagnostic	Refer to UART_SM_3
Multiple-fault protection	Refer to UART_SM_3
Recommendations and known limitations	Important note: it is assumed that the remote counterpart has an equivalent capability of performing the checks described. Refer to UART_SM_3 for further notice.

Important: *Hardware random failure consequences on potential violations of Device security feature are **not** detailed in this manual.*

3.6.37 Cryptographic processor (CRYP)

Table 123. CRYP_SM_0

SM CODE	CRYP_SM_0
Description	Periodic read-back of CRYP configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to CRYP configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	CRYP module available only on specific part numbers
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 124. CRYP_SM_1

SM CODE	CRYP_SM_1
Description	Encryption/decryption collateral detection
Ownership	ST
Detailed implementation	Encryption and decryption operations performed by CRYP module are composed by several data manipulations and checks, with different level of complexity according to the selected chaining algorithm. A major part of the hardware random failures affecting CRYP module leads to algorithm violations/errors. Leading to decoding errors on the receiver side.
Error reporting	Several error conditions can happen, check functional documentation.
Fault detection time	Dependency on <i>Device</i> configuration
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	CRYP module available only on specific part numbers
Initialization	Dependency on <i>Device</i> configuration
Periodicity	Continuous
Test for the diagnostic	Direct test procedure for CRYP efficiency is not available. CRYP run-time hardware failures leading to disabling such protection fall into multiple-fault scenario, from IEC 61508 perspective. Related failures are adequately mitigated by the combination of safety mechanisms reported in this table, field <i>Multiple-fault protection</i> .
Multiple-fault protection	CRYP_SM_2: Information redundancy techniques on messages, including end-to-end protection
Recommendations and known limitations	None

Table 125. CRYP_SM_2

SM CODE	CRYP_SM_2
Description	Information redundancy techniques on messages, including end-to-end protection
Ownership	<i>End user</i>
Detailed implementation	This method aim to protect the communication between a peripheral and his external counterpart. It is used in CRYP local safety concept to address failures not detected by the encryption/decryption features. Refer to UART_SM_3 description for detailed information.
Error reporting	Refer to UART_SM_3
Fault detection time	Refer to UART_SM_3
Addressed fault model	Refer to UART_SM_3
Dependency on <i>Device</i> configuration	CRYP module available only on specific part numbers
Initialization	Refer to UART_SM_3
Periodicity	Refer to UART_SM_3
Test for the diagnostic	Refer to UART_SM_3
Multiple-fault protection	Refer to UART_SM_3
Recommendations and known limitations	Important note: it is assumed that the remote counterpart has an equivalent capability of performing the checks described. Refer to UART_SM_3 for further notice.

Important: *Hardware random failure consequences on potential violations of Device security feature are **not** detailed in this manual.*

3.6.38 Advanced-control/General-purpose/High resolution and low-power timers

As the timers have multiple mutually independent channels possibly used for different functions, the safety mechanism is selected individually for each channel.

Table 126. ATIM_SM_0

SM CODE	ATIM_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to advanced, general-purpose and low-power timer configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 127. ATIM_SM_1

SM CODE	ATIM_SM_1
Description	1oo2 for counting timers
Ownership	End user
Detailed implementation	<p>This method implements via software a 1oo2 scheme between two counting resources.</p> <p>The guidelines for the implementation of the method are the following:</p> <ul style="list-style-type: none"> Two timers are programmed with same time base or frequency. In case of timer use as a time base: use in <i>Application software</i> one of the timer as time base source, and the other one just for check. Coherence check for the 1oo2 is done at application level, comparing two counter values each time the timer value is used to affect safety function. In case of interrupt generation: use the first timer as main interrupt source for the service routines, and the second timer as a "reference" to be checked at the initial of interrupt routine.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>Tolerance implementation in timer checks is recommended to avoid false positive outcomes of the diagnostic.</p> <p>This method applies to timer channels merely used as elapsed time counters.</p> <p>Events related to timers protected by the safety mechanisms must be monitored inside the routine managing the external watchdog (CPU_SM_5) reset.</p> <p><i>Note:</i> One timer may act as a reference for multiple other timers.</p>

Table 128. ATIM_SM_2

SM CODE	ATIM_SM_2
Description	1002 for input capture timers
Ownership	<i>End user</i>
Detailed implementation	<p>This method is conceived to protect timers used for acquisition and measurement of external signals (input capture, encoder reading). The implementation consists in connecting the external signals also to a redundant timer, and checking the coherence of the measured data at application level.</p> <p>Coherence check between timers is executed each time the reading is used by <i>Application software</i>.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	To reduce the potential effect of common cause failures, it is suggested to use for redundant check a channel belonging to a different timer module and mapped to non-adjacent pin on the device package.

Table 129. ATIM_SM_3

SM CODE	ATIM_SM_3
Description	Loopback scheme for pulse width modulation (PWM) outputs
Ownership	<i>End user</i>
Detailed implementation	<p>This method is implemented by connecting the PWM to a separate timer channel to acquire the generated waveform characteristics.</p> <p>The guidelines are the following:</p> <ul style="list-style-type: none"> Both PWM frequency and duty cycle are measured and checked versus the expected value. To reduce the potential effect of common cause failure, it is suggested to use for the loopback check a channel belonging to a different timer module and mapped to non-adjacent pins on the device package. <p>This measure can be replaced under the end-user responsibility by different loopback schemes already in place in the final application and rated as equivalent. For example if the PWM is used to drive an external power load, the reading of the on-line current value can be used instead of the PWM duty cycle measurement.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Depends on implementation
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	Efficiency versus transient failures is linked to final application characteristics. We define as T_m the minimum duration of PWM wrong signal permanence (wrong frequency, wrong duty, or both) required to violate the related safety function(s). Efficiency is maximized when execution test frequency is higher than $1/T_m$.

Table 130. ATIM_SM_4

SM CODE	ATIM_SM_4
Description	Lock bit protection for timers
Ownership	ST
Detailed implementation	This safety mechanism allows <i>End user</i> to lock down specified configuration options, thus avoiding unintended modifications by <i>Application software</i> . Therefore, it addresses software development systematic faults.
Error reporting	Not applicable
Fault detection time	Not applicable
Addressed fault model	None (Fault avoidance)
Dependency on <i>Device</i> configuration	None
Initialization	Lock protection must be enabled using LOCK bits in the TIMx_BDTR register.
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	Not applicable
Recommendations and known limitations	This method does not address timer configuration changes due to soft errors.

Note: *IRTIM is not individually mentioned here as its implementation is mostly based on general-purpose timer functions. Refer to related prescriptions.*

3.6.39 Basic timers

Table 131. GTIM_SM_0

SM CODE	GTIM_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to basic timer configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 132. GTIM_SM_1

SM CODE	GTIM_SM_1
Description	1oo2 for counting timers
Ownership	<i>End user</i>
Detailed implementation	<p>This method implements via software a 1oo2 scheme between two counting resources. The guidelines for the implementation of the method are the following:</p> <ul style="list-style-type: none"> Two timers are programmed with same time base or frequency. In case of timer use as a time base: use in <i>Application software</i> one of the timer as time base source, and the other one just for check. Coherence check for the 1oo2 is done at application level, comparing two counters values each time the timer value is used to affect safety function. In case of interrupt generation usage: use the first timer as main interrupt source for the service routines, and use the second timer as a <i>“reference”</i> to be checked at the initial of interrupt routine.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>Tolerance implementation in timer checks is recommended to avoid false positive outcomes of the diagnostic.</p> <p>Events related to timers protected by the safety mechanisms must be monitored inside the routine managing the external watchdog reset.</p> <p><i>Note:</i> <i>One timer may act as a reference for multiple other timers.</i></p>

3.6.40 Independent and system window watchdogs (IWDG and WWDG)

Table 133. WDG_SM_0

SM CODE	WDG_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to IWDG/WWDG configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 134. WDG_SM_1

SM CODE	WDG_SM_1
Description	Software test for watchdog at startup
Ownership	<i>End user</i>
Detailed implementation	This safety mechanism ensures the right functionality of the internal watchdogs in use. The test implementation allows the application software to induce a watchdog reset for a specific purpose such as at startup, and to determine that the cause of the reset was the test procedure itself, and not a software/hardware malfunction. This is confirmed by reading the associated hardware flag in the RCC status register before and after the test and applying specific SW flag, which stores nontrivial pattern at SRAM, just during the test execution. Both the <i>HW</i> and <i>SW</i> flags must be cleared once the test is done. This is essential to avoid repeating the test in a loop, and to correctly manage watchdog resets related to failures.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Startup
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	In a typical <i>End user</i> application, this test can be executed only at startup and during maintenance or offline periods. It could be associated to IEC 61508 concept of “proof test” and so it cannot be accounted for a diagnostic coverage contribution during operating time.

3.6.41 Real-time clock module (RTC)

Table 135. RTC_SM_0

SM CODE	RTC_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to RTC configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 136. RTC_SM_1

SM CODE	RTC_SM_1
Description	Application check of running RTC
Ownership	<i>End user</i>
Detailed implementation	The <i>Application software</i> implements some plausibility check on RTC calendar or timing data, mainly after a power-up and further date reading by RTC. The guidelines for the implementation of the method are the following: <ul style="list-style-type: none"> RTC backup registers are used to store coded information in order to detect the absence of VBAT during power-off period. RTC backup registers are used to periodically store compressed information on current date or time The <i>Application software</i> executes minimal consistence checks for date reading after power-on (detecting "past" date or time retrieve). The <i>Application software</i> periodically checks that RTC is actually running, by reading RTC timestamp progress and comparing with an elapsed time measurement based on STM32 internal clock or timers.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This method provides a limited diagnostic coverage for RTC failure modes. In case of <i>End user</i> application where RTC timestamps accuracy can affect in severe way the safety function (for example, medical data storage devices), it is strongly recommended to adopt more efficient system-level measures.

Table 137. RTC_SM_2

SM CODE	RTC_SM_2
Description	Information redundancy on backup registers
Ownership	<i>End user</i>
Detailed implementation	Data stored in RTC backup registers must be protected by a checksum with encoding capability (for instance, CRC). Checksum must be checked by application software before consuming stored data. This method guarantees data versus erases due to backup battery failures.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic/On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

Table 138. RTC_SM_3

SM CODE	RTC_SM_3
Description	Application-level measures to detect failures in timestamps/event capture
Ownership	<i>End user</i>
Detailed implementation	This method must detect failures affecting the RTC capability to correct execute the timestamps/event capture functions. Due to the nature strictly application-dependent of this solution, no detailed guidelines for its implementation are given here.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic/On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This method must be used only if the timestamps/event capture function is used in the safety function implementation. It is worth noting that the use of timestamp / event capture in safety-related applications with the <i>MCU</i> in Sleep or Stop mode is prevented by the assumed requirement ASR7 (refer to Section 3.3.1: Safety requirement assumptions).

3.6.42 Tamper and backup registers (TAMP)

Table 139. TAMP_SM_0

SM CODE	TAMP_SM_0
Description	Information redundancy on tamper backup registers
Ownership	<i>End user</i>
Detailed implementation	Data stored in tamper backup registers must be protected by a checksum with encoding capability (for instance, <i>CRC</i>). Checksum must be checked by <i>Application software</i> before consuming stored data. This method guarantees data versus erases due to backup battery failures.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

3.6.43 Inter-integrated circuit (I2C, I3C)

Table 140. IIC_SM_0

SM CODE	IIC_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to I2C configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 141. IIC_SM_1

SM CODE	IIC_SM_1
Description	Protocol error signals
Ownership	ST
Detailed implementation	I2C communication module embeds protocol error checks (like overrun, underrun, packet error etc.) conceived to detect network-related abnormal conditions. These mechanisms are only able to detect a small fraction of hardware random failures affecting the module itself.
Error reporting	Error flag raise and optional interrupt event generation
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	IIC_SM_2: Information redundancy techniques on messages
Recommendations and known limitations	Adoption of SMBus option grants the activation of more efficient protocol-level hardware checks such as CRC-8 packet protection. Enabling related interrupt generation on the detection of errors is highly recommended.

Table 142. IIC_SM_2

SM CODE	IIC_SM_2
Description	Information redundancy techniques on messages
Ownership	<i>End user</i>
Detailed implementation	This method is implemented adding to data packets transferred by I2C a redundancy check (such as a CRC check, or similar one) with encoding capability. The checksum encoding capability must be robust enough to guarantee at least 90% probability of detection for a single bit flip in the data packet. Consistency of data packet must be checked by <i>Application software</i> before consuming data.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	It is assumed that the remote I2C counterpart has an equivalent capability of performing the check described. To give an example on checksum encoding capability, using just a bit-by-bit addition is unappropriated. <i>Important:</i> This method must be considered as a subset of IIC_SM_4. Therefore, the implementation of IIC_SM_4 completely overlap this method. Refer to [4] for additional details.

Table 143. IIC_SM_3

SM CODE	IIC_SM_3
Description	CRC packet-level
Ownership	ST
Detailed implementation	I2C communication module allows to activate for specific mode of operation (SMBus) the automatic insertion (and check) of CRC checksums to packet data.
Error reporting	Error flag raise and optional Interrupt Event generation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Direct test procedure for CRC efficiency is not available. CRC run-time hardware failures leading to disabling such protection fall into multiple-fault scenario, from IEC 61508 perspective. Related failures are adequately mitigated by the combination of safety mechanisms reported in this table, field <i>Multiple-fault protection</i> .
Multiple-fault protection	IIC_SM_2: Information redundancy techniques on messages
Recommendations and known limitations	<p>This method can be part of the implementation for IIC_SM_2 or IIC_SM_4. In that case, because of the warning issued in the <i>Test for the diagnostic</i> field, this mechanism can not be the only one to guarantee message integrity.</p> <p>Enabling related interrupt generation on the detection of errors is highly recommended.</p> <p>This safety mechanism is not applicable to I3C</p>

Table 144. IIC_SM_4

SM CODE	IIC_SM_4
Description	Information redundancy techniques on messages, including end-to-end protection
Ownership	<i>End user</i>
Detailed implementation	<p>This method aims to protect the communication between a I2C peripheral and his external counterpart.</p> <p>Refer to UART_SM_3 description for detailed information.</p>
Error reporting	Refer to UART_SM_3
Fault detection time	Refer to UART_SM_3
Addressed fault model	Refer to UART_SM_3
Dependency on <i>Device</i> configuration	Refer to UART_SM_3
Initialization	Refer to UART_SM_3
Periodicity	Refer to UART_SM_3
Test for the diagnostic	Refer to UART_SM_3
Multiple-fault protection	Refer to UART_SM_3
Recommendations and known limitations	<p>It is assumed that the remote I2C counterpart has an equivalent capability of performing the checks described.</p> <p>Refer to UART_SM_3 for further notice.</p>

3.6.44 Universal synchronous/asynchronous receiver/transmitter and low power universal asynchronous receiver/transmitter (USART, UART, LPUART)

Table 145. UART_SM_0

SM CODE	UART_SM_0
Description	Periodic read-back of configuration registers
Ownership	End user
Detailed implementation	This method must be applied to USART, UART, LPUART configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 146. UART_SM_1

SM CODE	UART_SM_1
Description	Protocol error signals
Ownership	ST
Detailed implementation	USART, UART, LPUART communication module embeds protocol error checks (like additional parity bit check, overrun, frame error) conceived to detect network-related abnormal conditions. These mechanisms are only able to detect a small fraction of hardware random failures affecting the module itself. Error signals connected to these checkers are normally handled in a standard communication software, so the overhead is reduced.
Error reporting	Error flag raise and optional interrupt event generation
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	UART_SM_2: Information redundancy techniques on messages
Recommendations and known limitations	USART, UART, LPUART communication module allows several different configurations. The actual composition of communication error checks depends on the selected configuration. Enabling related interrupt generation on the detection of errors is highly recommended.

Table 147. UART_SM_2

SM CODE	UART_SM_2
Description	Information redundancy techniques on messages
Ownership	<i>End user</i>
Detailed implementation	<p>This method is implemented by adding to data packets transferred by this peripheral a redundancy check (such as a <i>CRC</i> check, or similar one) with encoding capability. The checksum encoding capability must be robust enough to guarantee at least 90% probability of detection for a single bit flip in the data packet.</p> <p>Consistency of data packet must be checked by <i>Application software</i> before consuming data.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>It is assumed that the remote counterpart has an equivalent capability of performing the check described.</p> <p>To give an example on checksum encoding capability, using just a bit-by-bit addition is unappropriated.</p> <p><i>Important:</i> <i>This method must be considered as a subset of UART_SM_3. Therefore, the implementation of UART_SM_3 completely overlap this method. Refer to [4] for additional details.</i></p>

Table 148. UART_SM_3

SM CODE	UART_SM_3
Description	Information redundancy techniques on messages, including end-to-end protection
Ownership	<i>End user</i>
Detailed implementation	<p>This method aims to protect the communication between a peripheral and his external counterpart establishing a kind of “protected” channel. The aim is to specifically address communication failure modes as reported in IEC 61508-2, 7.4.11.1.</p> <p>Implementation guidelines are as follows:</p> <ul style="list-style-type: none"> • Data packet must be protected (encapsulated) by an information redundancy check, like for instance a CRC checksum computed over the packet and added to payload. Checksum encoding capability must be robust enough to guarantee at least 90% probability of detection for a single-bit flip in the data packet. • Additional field added in payload reporting an unique identification of sender or receiver and an unique increasing sequence packet number. • Timing monitoring of the message exchange (for example check the message arrival within the expected time window), detecting therefore missed message arrival conditions. • <i>Application software</i> must verify before consuming data packet its consistency (CRC check), its legitimacy (sender or receiver) and the sequence correctness (sequence number check, no packets lost).
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>A major overlap between the requirements of this method and the implementation of complex communication software protocols can exists. Due to large adoption of these protocols in industrial applications, optimizations can be possible.</p> <p>It is assumed that the remote counterpart has an equivalent capability of performing the checks described.</p>

3.6.45 Serial peripheral interface (SPI)

Table 149. SPI_SM_0

SM CODE	SPI_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to SPI configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 150. SPI_SM_1

SM CODE	SPI_SM_1
Description	Protocol error signals
Ownership	ST
Detailed implementation	SPI communication module embeds protocol error checks (like overrun, underrun, timeout and so on) conceived to detect network-related abnormal conditions. These mechanisms are only able to detect a small fraction of hardware random failures affecting the module itself.
Error reporting	Error flag raise and optional interrupt event generation
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	SPI_SM_2: Information redundancy techniques on messages
Recommendations and known limitations	None

Table 151. SPI_SM_2

SM CODE	SPI_SM_2
Description	Information redundancy techniques on messages
Ownership	<i>End user</i>
Detailed implementation	<p>This method is implemented adding to data packets transferred by SPI a redundancy check (such as a CRC check, or similar one) with encoding capability. The checksum encoding capability must be robust enough to guarantee at least 90% probability of detection for a single bit flip in the data packet.</p> <p>Consistency of data packet must be checked by <i>Application software</i> before consuming data.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>It is assumed that the remote counterpart has an equivalent capability of performing the check described.</p> <p>To give an example on checksum encoding capability, using just a bit-by-bit addition is unappropriated.</p> <p><i>Important:</i> <i>This method must be considered as a subset of SPI_SM_4. Therefore, the implementation of SPI_SM_4 completely overlap this method. Refer to [4] for additional details.</i></p>

Table 152. SPI_SM_3

SM CODE	SPI_SM_3
Description	CRC packet-level
Ownership	ST
Detailed implementation	SPI communication module allows to activate automatic insertion (and check) of CRC-8 or CRC-18 checksums to packet data.
Error reporting	Error flag raise and optional Interrupt Event generation
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Direct test procedure for CRC efficiency is not available. CRC run-time hardware failures leading to disabling such protection fall into multiple-fault scenario, from IEC 61508 perspective. Related failures are adequately mitigated by the combination of safety mechanisms reported in this table, field <i>Multiple-fault protection</i> .
Multiple-fault protection	SPI_SM_2: Information redundancy techniques on messages
Recommendations and known limitations	This method can be part of the implementation for SPI_SM_2 or SPI_SM_4. In that case, because of the warning issued in the <i>Test for the diagnostic</i> field, this mechanism can not be the only one to guarantee message integrity.

Table 153. SPI_SM_4

SM CODE	SPI_SM_4
Description	Information redundancy techniques on messages, including end-to-end protection
Ownership	<i>End user</i>
Detailed implementation	This method aims to protect the communication between SPI peripheral and his external counterpart. Refer to UART_SM_3 description for detailed information.
Error reporting	Refer to UART_SM_3
Fault detection time	Refer to UART_SM_3
Addressed fault model	Refer to UART_SM_3
Dependency on <i>Device</i> configuration	Refer to UART_SM_3
Initialization	Refer to UART_SM_3
Periodicity	Refer to UART_SM_3
Test for the diagnostic	Refer to UART_SM_3
Multiple-fault protection	Refer to UART_SM_3
Recommendations and known limitations	Refer to UART_SM_3 for further notice. It is assumed that the remote SPI counterpart has an equivalent capability of performing the checks described.

3.6.46 Serial audio interface (SAI)

Table 154. SAI_SM_0

SM CODE	SAI_SM_0
Description	Periodic read-back of SAI configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to SAI configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 155. SAI_SM_1

SM CODE	SAI_SM_1
Description	SAI output loopback scheme
Ownership	<i>End user</i>
Detailed implementation	This method uses a loopback scheme to detect permanent and transient faults on the output channel used for serial audio frame generation. It is implemented by connecting the second serial audio interface as input for primary output generation. <i>Application software</i> is able therefore to identify wrong or missing audio frame generation.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous/ On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>Efficiency versus transient failures is linked to final application characteristics. We define as T_m the minimum duration of serial audio wrong signal permanence required to violate the related safety function(s). Efficiency is maximized when execution test frequency is higher than $1/T_m$.</p> <p>Method to be used when SAI interface safety-related use is <i>audio stream generation</i>.</p>

Table 156. SAI_SM_2

SM CODE	SAI_SM_2
Description	1oo2 scheme for SAI module
Ownership	<i>End user</i>
Detailed implementation	This safety mechanism is implemented using the two SAI interfaces to decode/receive the same input stream audio. <i>Application software</i> checks the coherence between the received data.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>The MCU performance overload and the implementation complexity associated to this method can be relevant.</p> <p>Method to be used when SAI interface safety-related use is <i>audio stream receive</i>.</p>

3.6.47 SPDIF receiver interface (SPDIFRX)

Table 157. SPDF_SM_0

SM CODE	SPDF_SM_0
Description	Periodic read-back of SPDIF configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to SPDIF configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 158. SPDF_SM_1

SM CODE	SPDF_SM_1
Description	Protocol error signals
Ownership	ST
Detailed implementation	IEC60598 S/PDIF data frame specification used in SPDIF interface embeds protocol error checks (like overrun, underrun, bit timing violations, parity, etc.) conceived to detect transmission-related abnormal conditions. These mechanisms are able anyway to detect a marginal percentage of hardware random failures affecting the module itself.
Error reporting	Error flag raise and optional Interrupt Event generation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	SPDF_SM_0: Periodic read-back of SPDIF configuration registers
Recommendations and known limitations	Enabling related interrupt generation on the detection of errors is highly recommended.

Table 159. SPDF_SM_2

SM CODE	SPDF_SM_2
Description	Information redundancy techniques on messages
Ownership	<i>End user</i>
Detailed implementation	This method is implemented adding to data S/PDIF data stream some form of information redundancy, possibly including information repetition, to address failure modes affecting the decoding section of the module.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	This method could be replaced by application-level alternative measures checking the correctness of the audio stream received. One given example could be represented by a set of plausibility checks executed after post-elaboration by voice recognition algorithms.

3.6.48 Management data input/output (MDIOS)

Table 160. MDIO_SM_0

SM CODE	MDIO_SM_0
Description	Periodic read-back of MDIO slave configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to MDIO slave configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 161. MDIO_SM_1

SM CODE	MDIO_SM_1
Description	Protocol error signals
Ownership	ST
Detailed implementation	MDIO communication protocol is based on a packet handling concept, including preamble/ start/stop correct conditions checks. This mechanism, mainly implemented to manage on field communication disturbance, is able to achieve a relevant diagnostic coverage on several MDIO module failure modes.
Error reporting	Error conditions are reported by flag bits in related registers, and interrupt generation.
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Permanent/transient
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	DSI_SM_0: Periodic read-back of DSI configuration registers
Recommendations and known limitations	Not applicable

Table 162. MDIO_SM_2

SM CODE	MDIO_SM_2
Description	Information redundancy techniques on MDIO registers contents, including register update awareness
Ownership	<i>End user</i>
Detailed implementation	<p>Information provided by external parties by MDIO communication must be protected by redundancy schemes (encoded data values and possibly the definition of a <i>checksum</i> register).</p> <p><i>Application software</i> must be aware of any register value update executed by external parties, so it is needed the implementation of a <i>validate/invalidate</i> mechanism to:</p> <ul style="list-style-type: none"> report to external party that updated data have been consumed mark as <i>invalidated</i> any data already consumed allow external party to inform <i>Application software</i> that new data are available
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not required
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	It is assumed that the external entity responsible to update/send data to <i>Application software</i> by the MDIO communication link is able to contribute to the MDIO failure mitigation, by detecting missing or incomplete data consumption.

3.6.49 Secure digital input/output MultiMediaCard interface (SDMMC)

Table 163. SDIO_SM_0

SM CODE	SDIO_SM_0
Description	Periodic read-back of SDIO/SMMC configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to SDIO/SMMC configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 164. SDIO_SM_1

SM CODE	SDIO_SM_1
Description	Protocol error signals including hardware CRC
Ownership	ST
Detailed implementation	SDIO/SMMC communication module embeds protocol error checks (like overrun, underrun, timeout etc.) and CRC-packet checks as well, conceived to detect network-related abnormal conditions. These mechanisms are only able to detect a small fraction of hardware random failures affecting the module itself.
Error reporting	Error flag raise and optional interrupt event generation
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	SDIO_SM_2: Information redundancy techniques on messages
Recommendations and known limitations	Enabling related interrupt generation on the detection of errors is highly recommended.

Table 165. SDIO_SM_2

SM CODE	SDIO_SM_2
Description	Information redundancy techniques on messages
Ownership	<i>End user</i>
Detailed implementation	<p>This method is implemented adding to data packets transferred by SDIO/SMMC a redundancy check (like a CRC check, or similar one) with encoding capability. The checksum encoding capability must be robust enough to guarantee at least 90% probability of detection for a single bit flip in the data packet.</p> <p>Consistency of data packet must be checked by <i>Application software</i> before consuming data.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>To give an example on checksum encoding capability, using just a bit-by-bit addition is unappropriated.</p> <p>This safety mechanism can overlap with information redundancy techniques implemented at system level to address failure of physical device connected to SDIO/SMMC port.</p>

Note: *The safety mechanisms mentioned above are addressing the SDIO/SMMC interface included in STM32 MCUs. No claims are done in this Safety Manual about the mitigation of hardware random faults affecting the external memory connected to SDIO/SMMC port.*

3.6.50 Controller area network (FDCAN)

Table 166. CAN_SM_0

SM CODE	CAN_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	<p>This method must be applied to FDCAN configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI).</p>
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 167. CAN_SM_1

SM CODE	CAN_SM_1
Description	Protocol error signals
Ownership	ST
Detailed implementation	CAN communication module embeds protocol error checks (like error counters) conceived to detect network-related abnormal conditions. These mechanisms are only able to detect a small fraction of hardware random failures affecting the module itself. Error signals connected to these checkers are normally handled in a standard communication software, so the overhead is reduced.
Error reporting	Several error condition are reported by flag bits in related CAN registers.
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CAN_SM_2: Information redundancy techniques on messages, including end-to-end protection.
Recommendations and known limitations	Enabling related interrupt generation on the detection of errors is highly recommended.

Table 168. CAN_SM_2

SM CODE	CAN_SM_2
Description	Information redundancy techniques on messages, including end-to-end protection.
Ownership	<i>End user</i>
Detailed implementation	<p>This method aims to protect the communication between a peripheral and his external counterpart establishing a kind of “protected” channel. The aim is to specifically address communication failure modes as reported in IEC 61508-2, 7.4.11.1.</p> <p>Implementation guidelines are as follows:</p> <ul style="list-style-type: none"> • Data packet must be protected (encapsulated) by an information redundancy check, like for instance a CRC checksum computed over the packet and added to payload. Checksum encoding capability must be robust enough to guarantee at least 90% probability of detection for a single-bit flip in the data packet. • Additional field added in payload reporting an unique identification of sender or receiver and an unique increasing sequence packet number. • Timing monitoring of the message exchange (for example check the message arrival within the expected time window), detecting therefore missed message arrival conditions. • <i>Application software</i> must verify before consuming data packet its consistency (CRC check), its legitimacy (sender or receiver) and the sequence correctness (sequence number check, no packets lost).
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>A major overlap between the requirements of this method and the implementation of complex communication software protocols can exists. Due to large adoption of these protocols in industrial applications, optimizations can be possible.</p> <p>It is assumed that the remote counterpart has an equivalent capability of performing the checks described.</p>

3.6.51 USB on-the-go full-speed, USB on-the-go high-speed (OTG_FS, OTG_HS)

Table 169. USB_SM_0

SM CODE	USB_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to USB configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 170. USB_SM_1

SM CODE	USB_SM_1
Description	Protocol error signals
Ownership	ST
Detailed implementation	USB communication module embeds protocol error checks (like overrun, underrun, NRZI, bit stuffing etc.) conceived to detect network-related abnormal conditions. These mechanisms are only able to detect a small fraction of hardware random failures affecting the module itself.
Error reporting	Error flag raise and optional interrupt event generation
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	USB_SM_2: Information redundancy techniques on messages
Recommendations and known limitations	Enabling related interrupt generation on the detection of errors is highly recommended.

Table 171. USB_SM_2

SM CODE	USB_SM_2
Description	Information redundancy techniques on messages
Ownership	<i>End user</i> or ST
Detailed implementation	The implementation of required information redundancy on messages, USB communication module is fitted by hardware capability. It basically allows to activate the automatic insertion (and check) of CRC checksums to packet data.
Error reporting	Error flag raise and optional interrupt event generation
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Error reporting configuration, if interrupt events are planned
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<i>Important: This method must be considered as a subset of USB_SM_3. Therefore, the implementation of USB_SM_3 completely overlap this method. Refer to [4] for additional details.</i>

Table 172. USB_SM_3

SM CODE	USB_SM_3
Description	Information redundancy techniques on messages, including end-to-end protection.
Ownership	<i>End user</i>
Detailed implementation	This method aims to protect the communication between the OTG_FS, OTG_HS peripheral and its external counterpart. Refer to UART_SM_3 description for detailed information.
Error reporting	Refer to UART_SM_3
Fault detection time	Refer to UART_SM_3
Addressed fault model	Refer to UART_SM_3
Dependency on <i>Device</i> configuration	Refer to UART_SM_3
Initialization	Refer to UART_SM_3
Periodicity	Refer to UART_SM_3
Test for the diagnostic	Refer to UART_SM_3
Multiple-fault protection	Refer to UART_SM_3
Recommendations and known limitations	This method applies in case USB bulk or isochronous transfers are used. For other transfers modes the USB hardware protocol already implements several features of this requirement. Refer to UART_SM_3 for further notice.

3.6.52 USB Type-C® / USB Power Delivery interface (UCPD)

Table 173. UCPD_SM_0

SM CODE	UCPD_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to UCPD configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 174. UCPD_SM_1

SM CODE	UCPD_SM_1
Description	Protocol error signals
Ownership	ST
Detailed implementation	UCPD communication module embeds protocol error checks (including CRC encoding at packet level) conceived to detect network-related abnormal conditions. These mechanisms are able anyway to detect a marginal percentage of hardware random failures affecting the module itself.
Error reporting	Error flag raise and optional interrupt event generation
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	UCPD_SM_3: Information redundancy techniques on messages, including end-to-end protection
Recommendations and known limitations	None

Table 175. UCPD_SM_2

SM CODE	UCPD_SM_2
Description	UCPD state machine monitoring
Ownership	<i>End user</i>
Detailed implementation	The time evolution of the state machine associated to the status of the external peer(s) connected to UCPD peripheral must be monitored. Deviation between the current peer status and the expected one must be considered as effect of hardware random failure, leading to an error raise to <i>Application software</i> .
Error reporting	Depends on implementation
Fault detection time	Depends on implementation. The relationship between maximum allowed time drift for remote peer status transition and overall PST must be considered.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	None

Table 176. UCPD_SM_3

SM CODE	UCPD_SM_3
Description	Information redundancy techniques on messages, including end-to-end protection
Ownership	<i>End user</i>
Detailed implementation	This method aims to protect the communication between the UCPD peripheral and its external counterpart. Refer to UART_SM_3 description for detailed information.
Error reporting	Refer to UART_SM_3
Fault detection time	Refer to UART_SM_3
Addressed fault model	Refer to UART_SM_3
Dependency on <i>Device</i> configuration	Refer to UART_SM_3
Initialization	Refer to UART_SM_3
Periodicity	Refer to UART_SM_3
Test for the diagnostic	Refer to UART_SM_3
Multiple-fault protection	Refer to UART_SM_3
Recommendations and known limitations	Refer to UART_SM_3 for further notice.

3.6.53 Ethernet (ETH): media access control (MAC) with DMA controller

Table 177. ETH_SM_0

SM CODE	ETH_SM_0
Description	Periodic read-back of Ethernet configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to Ethernet configuration registers (including those relate to unused module features). Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 178. ETH_SM_1

SM CODE	ETH_SM_1
Description	Protocol error signals including hardware CRC
Ownership	ST
Detailed implementation	Ethernet communication module embeds protocol error checks (like overrun, underrun, timeout, packet composition violation etc.) and CRC-packet checks as well, conceived to detect network-related abnormal conditions. These mechanisms are able anyway to detect a percentage of hardware random failures affecting the module itself.
Error reporting	Error flag raise and optional Interrupt Event generation
Fault detection time	Depends on peripheral configuration (for example baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Direct test procedure for CRC efficiency is not available. CRC run-time hardware failures leading to disabling such protection fall into multiple-fault scenario, from IEC 61508 perspective. Related failures are adequately mitigated by the combination of safety mechanisms reported in this table, field <i>Multiple-fault protection</i> .
Multiple-fault protection	ETH_SM_2: Information redundancy techniques on messages, including end-to-end protection
Recommendations and known limitations	Enabling related interrupt generation on the detection of errors is highly recommended.

Table 179. ETH_SM_2

SM CODE	ETH_SM_2
Description	Information redundancy techniques on messages, including end-to-end protection
Ownership	<i>End user</i>
Detailed implementation	This method aim to protect the communication between a peripheral and its external counterpart. It is used in Ethernet local safety concept to address failures not detected by ETH_SM_1 and to increase its associated diagnostic coverage. Refer to UART_SM_3 description for detailed information.
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	The implementation on <i>Application software</i> of complex Ethernet-based communication stacks (like TCP/IP) is able to satisfy the requirements of this method.

Note: *The use of the DMA feature inside Ethernet module requires the adoption of the set of safety mechanisms defined for DMA (refer to Section 3.6.14: General purpose and high-performance direct memory access controller (GPDMA, HPDMA)).*

3.6.54 Extended-SPI interface (XSPI), XSPI I/O manager (XSPIM)

Table 180. XSPI_SM_0

SM CODE	XSPI_SM_0
Description	Periodic read-back of XSPI, XSPIM configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to XSPI, XSPIM configuration registers (including those relate to unused module features). Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI).
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Note: *Failures of XSPI, XSPIM modules are addressed by the combination of safety measures needed to protect the integrity of data stored in the external memories connected through XSPI, XSPIM. The combination of safety mechanisms depends on the nature of stored data.*

3.6.55 HDMI-CEC (CEC)

Table 181. HDMI_SM_0

SM CODE	HDMI_SM_0
Description	Periodic read-back of configuration registers
Ownership	<i>End user</i>
Detailed implementation	This method must be applied to CEC configuration registers. Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI) .
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

Table 182. HDMI_SM_1

SM CODE	HDMI_SM_1
Description	Protocol error signals
Ownership	ST
Detailed implementation	CEC communication module embeds protocol error checks (such as additional parity bit check, overrun, frame error) conceived to detect network-related abnormal conditions. These mechanisms are able anyway to detect a marginal percentage of hardware random failures affecting the module itself. Error signals connected to these checkers are normally handled in a standard communication software, so the overhead is reduced.
Error reporting	Error flag raise and optional interrupt event generation
Fault detection time	Depends on peripheral configuration (for instance baud rate). Refer to functional documentation.
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Continuous
Test for the diagnostic	Not applicable
Multiple-fault protection	HDMI_SM_2: Information redundancy techniques on messages
Recommendations and known limitations	Enabling related interrupt generation on the detection of errors is highly recommended.

Table 183. HDMI_SM_2

SM CODE	HDMI_SM_2
Description	Information redundancy techniques on messages
Ownership	<i>End user</i>
Detailed implementation	<p>This method is implemented adding to data packets transferred by CEC a redundancy check (such as <i>CRC</i> check, or similar one) with encoding capability. The checksum encoding capability must be robust enough to guarantee at least 90% probability of detection for a single bit flip in the data packet.</p> <p>Consistency of data packet must be checked by <i>Application software</i> before consuming data.</p>
Error reporting	Depends on implementation
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	On demand
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software
Recommendations and known limitations	<p>It is assumed that the remote HDMI-CEC counterpart has an equivalent capability of performing the check described.</p> <p>To give an example on checksum encoding capability, using just a bit-by-bit addition is inappropriate.</p>

3.6.56 Graphic timer (GFXTIM)

If GFXTIM timer features are used within graphic modules, its failures are assumed to be addressed by related application-dependent safety concepts. If, instead, the GFXTIM timer is used as a standard timer, refer to guidance provided for general-purpose timers ([Section 3.6.39: Basic timers](#)).

3.6.57 Disable and periodic cross-check of unintentional activation of unused peripherals

This section reports safety mechanisms that address peripherals not used by the safety application, or not used at all.

Table 184. FFI_SM_0

SM CODE	FFI_SM_0
Description	Disable of unused peripherals
Ownership	<i>End user</i>
Detailed implementation	<p>This method contributes to the reduction of the probability of cross-interferences caused by peripherals not used by the software application, in case a hardware failure causes an unintentional activation.</p> <p>After the system boot, <i>Application software</i> must disable all unused peripherals and make them inaccessible with this procedure:</p> <ul style="list-style-type: none"> • Enable reset flag on AHB and APB peripheral reset register. • Disable clock distribution on AHB and APB peripheral clock enable register.
Error reporting	Not applicable
Fault detection time	Not applicable
Addressed fault model	Not applicable
Dependency on <i>Device</i> configuration	None
Initialization	Not applicable
Periodicity	Startup
Test for the diagnostic	Not applicable
Multiple-fault protection	FFI_SM_1: Periodic read-back of interference avoidance registers
Recommendations and known limitations	None

Table 185. FFI_SM_1

SM CODE	FFI_SM_1
Description	Periodic read-back of interference avoidance registers
Ownership	<i>End user</i>
Detailed implementation	<p>This method contributes to the reduction of the probability of cross-interferences between peripherals that can potentially conflict on the same input/output pins, including for instance unused peripherals. This diagnostic measure must be applied to following registers:</p> <ul style="list-style-type: none"> • clock enable and disable registers • alternate function programming registers <p>Detailed information on the implementation of this method can be found in Section 3.6.17: Extended interrupt and events controller (EXTI).</p>
Error reporting	Refer to NVIC_SM_0
Fault detection time	Refer to NVIC_SM_0
Addressed fault model	Refer to NVIC_SM_0
Dependency on <i>Device</i> configuration	Refer to NVIC_SM_0
Initialization	Refer to NVIC_SM_0
Periodicity	Refer to NVIC_SM_0
Test for the diagnostic	Refer to NVIC_SM_0
Multiple-fault protection	Refer to NVIC_SM_0
Recommendations and known limitations	Refer to NVIC_SM_0

3.6.58 System

Table 186. DUAL_SM_0

SM CODE	DUAL_SM_0
Description	Cross-check between two STM32 devices
Ownership	<i>End user</i>
Detailed implementation	<p>This method is implemented in the spirit of technique described in IEC 61508-7, A.3.5 "Reciprocal comparison by software", which is rated in IEC 61508-2 Table A.4 as capable to achieve high level of diagnostic coverage.</p> <p>The two processing units exchange data reciprocally, and a fail in the comparison is considered as a detection of a failure in one of the two unit. The guidelines for the implementation are the following:</p> <ul style="list-style-type: none"> Data exchanged include output results, intermediate results⁽¹⁾ and the results (pass/fail) of each software-implemented safety mechanisms executed on periodic basis on both MCUs (for example CPU_SM_0) Software routines devoted to data exchange/comparison must be logically separated from the software implementing the safety function(s). Systematic capability of software implementing this method must be equal or above the one of the software implementing the safety function(s). Independence and lack of interference between the software implementing the data exchange/comparison and the one implementing the safety function(s) must be proven. Frequency of data exchange/comparison is imposed by the system PST (refer to related timing constraints for periodic safety mechanisms), except for output results which needs to be exchanged/compared at the same rate they are potentially updated.
Error reporting	-
Fault detection time	Depends on implementation
Addressed fault model	Permanent/transient
Dependency on <i>Device</i> configuration	None
Initialization	Depends on implementation
Periodicity	Periodic
Test for the diagnostic	Not applicable
Multiple-fault protection	CPU_SM_0: Periodic core self-test software (individually executed on both processing units)
Recommendations and known limitations	<p>This method is usually rated as optional because it is not strictly needed in the framework of 1oo2 architecture described in Section 3.2.4: Reference safety architectures - 1oo2. Anyway, it is included here only for its use in such an architecture.</p> <p>This method can provide additional safety margin for systems that need further protection against fault accumulation.</p> <p>Because this method could be a potential source of common cause failure between the two 1oo2 channels (in case of incorrect implementation), <i>End user</i> is recommended to closely follow the Detailed implementation guidelines in this table.</p>

1. the value of each variable able to directly influence the final individual channel output, such as:

- variables included in computation of the final result; for example, of a PWM rate
- variables involved in a decision determining the final result; for example, two variables used in a comparison which determines if a GPIO output is set high or low.

3.7 Conditions of use

The table below provides a summary of the safety concept recommendations reported in [Section 3.6: Hardware and software diagnostics](#). The conditions of use to be applied to STM32H7Rx/7Sx devices are reported in form of safety mechanism requirements. Exception is represented by some conditions of use introduced by FMEA analysis in order to correctly address specific failure modes. These conditions of use are reported at the end of the table presented in this section.

Rank column reports how related safety mechanism has been considered during the analysis, with following meaning:

- ++ The safety mechanism is highly recommended as common practice. It is considered in this document for the computation of safety metrics to allow the use of *Device* in systems implementing safety functions up to *SIL2* with a single *MCU* or up to *SIL3* with two *MCUs* in 1oo2 scheme. Missing implementation may lead to invalidate any safety feature claimed in this manual and must be supported by adequate arguments under end user responsibility (refer to [Section 4.1.1](#) for guidance).
- + The safety mechanism is recommended as additional safety measure, but not considered in this document for the computation of safety metrics. The *End user* can skip the implementation in case it is in contradiction with functional requirements or overlapped by another mechanism ranked ++.
- o The safety mechanism is optional. It is not strictly required for the implementation of safety functions up to *SIL2*, or it is related to a specific *MCU* configuration.

The X marker in the *Perm* and *Trans* table columns indicates that the related safety mechanism is effective for such fault model.

Table 187. List of safety recommendations

Diagnostic	Description	Rank	Perm	Trans
Arm® Cortex®-M7				
CPU_SM_0	Periodic core self-test software for Arm® Cortex®-M7 CPU.	++	X	-
CPU_SM_1	Control flow monitoring in Application software.	++	X	X
CPU_SM_2	Double computation in <i>Application software</i>	++	-	X
CPU_SM_3	Arm®Cortex®-M7 HardFault exceptions	++	X	X
CPU_SM_4	Stack hardening for <i>Application software</i>	+	X	X
CPU_SM_5	External watchdog	++ ⁽¹⁾	X	X
CPU_SM_6	Independent watchdog	++ ⁽¹⁾	X	X
CPU_SM_7	Memory protection unit (<i>MPU</i>).	++ ⁽²⁾	X	X
CPU_SM_9	Periodic self-test software for Arm®Cortex® -M7 caches	++ ⁽³⁾	X	-
CPU_SM_10	ECC on Arm®Cortex® -M7 caches	++ ⁽³⁾	X	X
MPU_SM_0	Periodic read-back of <i>MPU</i> configuration registers	++ ⁽²⁾	X	X
MPU_SM_1	<i>MPU</i> software test	o	X	-
System bus architecture/BusMatrix				
BUS_SM_0	Periodic software test for interconnections	++	X	-
BUS_SM_1	Information redundancy in intra-chip data exchanges	++	X	X
Embedded SRAM				
RAM_SM_0	Periodic software test for static random access memory (SRAM)	+ ⁽⁴⁾	X	-
RAM_SM_2	Stack hardening for <i>Application software</i>	+	X	X
RAM_SM_3	Information redundancy for safety-related variables in the <i>Application software</i>	++	X	X

Diagnostic	Description	Rank	Perm	Trans
RAM_SM_4	Control flow monitoring in <i>Application software</i>	o ⁽⁵⁾	X	X
RAM_SM_5	Periodic integrity test for <i>Application software</i> in RAM	o ⁽⁵⁾	X	X
RAM_SM_6	Read protection (RDP) and write protection (WRP)	+	-	-
RAM_SM_7	ECC on SRAM	++	X	X
RAM_SM_8	Periodic test by software for SRAM address decoder	++	X	-
RAM_SM_10	Software for ECC diagnostic on RAM	++ ⁽⁶⁾	X	-
Embedded flash memory				
FLASH_SM_0	Periodic software test for flash memory	+ ⁽⁷⁾	X	-
FLASH_SM_1	Control flow monitoring in <i>Application software</i>	++ ⁽⁷⁾	X	X
FLASH_SM_2	Arm®Cortex®-M7 HardFault exceptions	++	X	X
FLASH_SM_3	Option byte write protection	++	-	-
FLASH_SM_4	Static data encapsulation	+ ⁽⁷⁾	X	X
FLASH_SM_6	Flash memory unused area-filling code	+	-	-
FLASH_SM_7	ECC on flash memory	++	X	X
FLASH_SM_8	Read protection (RDP), write protection (WRP), and proprietary code readout protection (PCROP)	+	-	-
FLASH_SM_9	Periodic test by software for flash memory address decoder	++ ⁽⁷⁾	X	-
External flash memory				
EXTMEM_SM_0	Periodic software test external for flash memory	o ⁽⁸⁾	X	-
EXTMEM_SM_1	Control flow monitoring in <i>Application software</i>	o ⁽⁸⁾	X	X
EXTMEM_SM_2	Arm®Cortex®-M7 HardFault exceptions	o ⁽⁸⁾	X	X
EXTMEM_SM_4	Static data encapsulation	o ⁽⁸⁾	X	X
EXTMEM_SM_6	Flash memory unused area filling code	o ⁽⁸⁾	-	-
EXTMEM_SM_9	Periodic test by software for flash memory address decoder	o ⁽⁸⁾	X	-
Memory cipher engine (MCE)				
MCE_SM_0	Periodic read-back of MCE configuration registers	++	X	X
MCE_SM_1	MCE encryption/decryption collateral detection	++	X	X
MCE_SM_2	Arm®Cortex®-M7 HardFault exceptions	++	X	X
Power controller (PWR)				
VSUP_SM_0	Periodic read-back of configuration registers	++	X	X
VSUP_SM_1	Supply voltage internal monitoring (PVD)	++	X	-
VSUP_SM_2	Independent watchdog	++	X	-
VSUP_SM_3	Internal temperature sensor check	-	-	-
VSUP_SM_5	System-level power supply management	++	-	
Reset and clock controller (RCC)				
CLK_SM_0	Periodic read-back of configuration registers	++	X	X
CLK_SM_1	Clock security system (CSS)	+	X	-
CLK_SM_2	Independent watchdog	+	X	-
CLK_SM_3	Internal clock cross-measurement	+	X	-

Diagnostic	Description	Rank	Perm	Trans
General-purpose input/output (GPIO)				
GPIO_SM_0	Periodic read-back of configuration registers	++	X	X
GPIO_SM_1	1002 for input GPIO lines	++	X	X
GPIO_SM_2	Loopback scheme for output GPIO lines	++	X	X
GPIO_SM_3	GPIO port configuration lock register	+	-	-
Debug system or peripheral control				
DBG_SM_0	Watchdog protection	++	X	X
LOCK_SM_0	Lock mechanism for configuration options	+	-	-
System configuration controller (SYSCFG)				
SYSCFG_SM_0	Periodic read-back of configuration registers	++	X	X
DIAG_SM_0	Periodic read-back of hardware diagnostics configuration registers	++	X	X
General purpose and high-performance direct memory access controller (GPDMA, HPDMA)				
DMA_SM_0	Periodic read-back of configuration registers	++	X	X
DMA_SM_1	Information redundancy on data packet transferred via <i>DMA</i>	++	X	X
DMA_SM_2	Information redundancy by including sender or receiver identifier on data packet transferred via <i>DMA</i>	++	X	X
DMA_SM_3	Periodic software test for <i>DMA</i>	+	X	-
DMA_SM_4	<i>DMA</i> transaction awareness	++	X	X
Chrom-Art Accelerator controller (DMA2D)				
DMA2D_SM_0	Periodic read-back of configuration registers	++	X	X
DMA2D_SM_1	Periodic software test for DMA2D functions	++	X	-
DMA2D_SM_2	DMA processing and interrupt awareness	++	X	X
Chrom-GRC™, Neo-Chrom graphic processor, ICACHE (GFXMMU, GPU2D)				
GFX_SM_0	Periodic read-back of GFXMMU, GPU2D, ICACHE configuration registers	++	X	X
Extended interrupt and events controller (EXTI)				
NVIC_SM_0	Periodic read-back of configuration registers	++	X	X
NVIC_SM_1	Expected and unexpected interrupt check	++	X	X
NVIC_SM_2	Interrupt vectors periodic check	++	X	X
Cyclic redundancy-check calculation unit (CRC)				
CRC_SM_0	CRC self-coverage	++	X	X
CORDIC co-processor (CORDIC)				
CORD_SM_0	Periodic read-back of configuration registers	++	X	-
CORD_SM_1	Periodic software test for CORDIC functions	++ ⁽⁹⁾	X	-
CORD_SM_2	CORDIC /Arm® Cortex®-M7 periodic reciprocal comparison by software	++ ⁽⁹⁾	X	-
CORD_SM_3	Double computation for CORDIC functions	++	-	X
Filter math accelerator (FMAC)				
FMAC_SM_0	Periodic read-back of configuration registers	++	X	-
FMAC_SM_1	Periodic software test for FMAC functions	++ ⁽¹⁰⁾	X	-

Diagnostic	Description	Rank	Perm	Trans
FMAC_SM_2	FMAC/Arm Cortex-M7 periodic reciprocal comparison by software	++ ⁽¹⁰⁾	X	-
FMAC_SM_3	Double computation for FMAC functions	++	-	X
Flexible static memory controller (FSMC)				
FSMC_SM_0	Control flow monitoring in <i>Application software</i>	++ ⁽¹¹⁾	X	X
FSMC_SM_1	Information redundancy on external memory connected to FSMC	++ ⁽¹¹⁾	X	X
FSMC_SM_2	Periodic read-back of FSMC configuration registers	++	X	X
FSMC_SM_3	ECC engine on NAND interface in FSMC module	++	-	X
Octo-SPI interface (OCTOSPI)				
QSPI_SM_0	Periodic read-back of OCTOSPI configuration registers	++	X	X
QSPI_SM_1	Protocol error signals including hardware CRC	++	X	X
QSPI_SM_2	Information redundancy techniques on messages	++	X	X
Delay block (DLYB)				
DLB_SM_0	Periodic read-back of DLYB configuration registers	++	X	X
Analog-to-digital converter (ADC)				
ADC_SM_0	Periodic read-back of configuration registers	++	X	X
ADC_SM_1	Multiple acquisition by <i>Application software</i>	++	-	X
ADC_SM_2	Range check by <i>Application software</i>	++	X	X
ADC_SM_3	Periodic software test for ADC	++	X	-
ADC_SM_4	1002 scheme for ADC inputs	+	X	X
Digital temperature sensor (DTS)				
DTS_SM_0	Periodic read-back of configuration registers	++	X	X
Voltage reference buffer (VREFBUF)				
VREF_SM_0	Periodic read-back of VREFBUF system configuration registers	++	X	X
VREF_SM_1	VREF cross-check by ADC reading	+	X	-
Multi-function digital filter (MDF), Audio digital filter (ADF)				
MDF_SM_0	Periodic read-back of configuration registers	++	X	X
MDF_SM_1	1002 scheme for MDF/ADF module	++	X	X
MDF_SM_2	Plausibility check on inputs data stream	++	X	X
Digital camera interface pixel pipeline (DCMIPP)				
DCMI_SM_0	Periodic read-back of DCMI configuration registers	++	X	X
DCMI_SM_1	DCMI video input data synchronization	++	X	X
Parallel synchronous slave interface (PSSI)				
PSSI_SM_0	Periodic read-back of PSSI configuration registers	++	X	X
PSSI_SM_1	Information redundancy techniques on data stream, including end-to-end protection	++	X	X
LCD-TFT display controller (LTDC)				
LCD_SM_0	Periodic read-back of LTDC configuration registers and buffer memory	++	X	X
LCD_SM_1	LTDC acquisition by ADC channel	++	X	-

Diagnostic	Description	Rank	Perm	Trans
JPEG codec (JPEG)				
JPEG_SM_0	Periodic read-back of JPEG codec configuration registers	++	X	X
JPEG_SM_1	Periodic test for JPEG encoding/decoding functions	++	X	-
JPEG_SM_2	Application-level detection of failures affecting JPEG coding/encoding	++	X	X
True random number generator (RNG)				
RNG_SM_0	Periodic read-back of RNG configuration register	++	X	X
RNG_SM_1	RNG module entropy on-line tests	++	X	-
Advanced encryption standard hardware accelerator/Secure AES coprocessor (AES/SAES)				
AES_SM_0	Periodic read-back of AES configuration registers	++	X	X
AES_SM_1	Encryption/decryption collateral detection	++	X	X
AES_SM_2	Information redundancy techniques on messages, including end-to-end protection	++	X	X
Cryptographic processor (CRYP)				
CRYP_SM_0	Periodic read-back of CRYP configuration registers	++	X	X
CRYP_SM_1	Encryption/decryption collateral detection	++	X	X
CRYP_SM_2	Information redundancy techniques on messages, including end-to-end protection	++	X	X
HASH processor (HASH)				
HASH_SM_0	Periodic read-back of HASH configuration registers	++	X	X
HASH_SM_1	HASH processing collateral detection	++	X	X
On-the-fly decryption engine (OTFDEC)				
OTFDEC_SM_0	Periodic read-back of OTFDEC configuration registers	++	X	X
OTFDEC_SM_1	OTFDEC encryption/decryption collateral detection	++	X	X
OTFDEC_SM_2	Arm® Cortex®-M7 HardFault exceptions	++	X	X
OTFDEC_SM_3	Static data encapsulation	++	X	X
Public key accelerator (PKA)				
PKA_SM_0	Periodic read-back of PKA configuration registers	++	X	X
PKA_SM_1	PKA key computation collateral detection	++	X	X
Advanced-control/General-purpose/High resolution and low-power timers				
ATIM_SM_0	Periodic read-back of configuration registers	++	X	X
ATIM_SM_1	1002 for counting timers	++	X	X
ATIM_SM_2	1002 for input capture timers	++	X	X
ATIM_SM_3	Loopback scheme for pulse width modulation (PWM) outputs	++	X	X
ATIM_SM_4	Lock bit protection for timers	+	-	-
Basic timers				
GTIM_SM_0	Periodic read-back of configuration registers	++	X	X
GTIM_SM_1	1002 for counting timers	++	X	X
Independent and system window watchdogs (IWDG and WWDG)				
WDG_SM_0	Periodic read-back of configuration registers	++	X	X
WDG_SM_1	Software test for watchdog at startup	o	X	-

Diagnostic	Description	Rank	Perm	Trans
Real-time clock module (RTC)				
RTC_SM_0	Periodic read-back of configuration registers	++	X	X
RTC_SM_1	Application check of running RTC	++	X	X
RTC_SM_2	Information redundancy on backup registers	o	X	X
RTC_SM_3	Application-level measures to detect failures in timestamps/event capture	o	X	X
Tamper and backup registers (TAMP)				
TAMP_SM_0	Information redundancy on tamper backup registers	+	X	X
Inter-integrated circuit (I2C, I3C)				
IIC_SM_0	Periodic read-back of configuration registers	++	X	X
IIC_SM_1	Protocol error signals	++	X	X
IIC_SM_2	Information redundancy techniques on messages	++	X	X
IIC_SM_3	CRC packet-level	+	X	X
IIC_SM_4	Information redundancy techniques on messages, including end-to-end protection	+	X	X
Universal synchronous/asynchronous receiver/transmitter and low power universal asynchronous receiver/transmitter (USART, UART, LPUART)				
UART_SM_0	Periodic read-back of configuration registers	++	X	X
UART_SM_1	Protocol error signals	++	X	X
UART_SM_2	Information redundancy techniques on messages	++	X	X
UART_SM_3	Information redundancy techniques on messages, including end-to-end protection	++	X	X
Serial peripheral interface (SPI)				
SPI_SM_0	Periodic read-back of configuration registers	++	X	X
SPI_SM_1	Protocol error signals	++	X	X
SPI_SM_2	Information redundancy techniques on messages	++	X	X
SPI_SM_3	CRC packet-level	+	X	X
SPI_SM_4	Information redundancy techniques on messages, including end-to-end protection	+	X	X
Serial audio interface (SAI)				
SAI_SM_0	Periodic read-back of SAI configuration registers	++	X	X
SAI_SM_1	SAI output loopback scheme	++	X	X
SAI_SM_2	1002 scheme for SAI module	++	X	X
SPDIF receiver interface (SPDIFRX)				
SPDF_SM_0	Periodic read-back of SPDIF configuration registers	++	X	X
SPDF_SM_1	Protocol error signals	++	X	X
SPDF_SM_2	Information redundancy techniques on messages	++	X	X
Management data input/output (MDIOS)				
MDIO_SM_0	Periodic read-back of MDIO slave configuration registers	++	X	X
MDIO_SM_1	Protocol error signals	++	X	X
MDIO_SM_2	Information redundancy techniques on MDIO registers contents, including register update awareness	++	X	X

Diagnostic	Description	Rank	Perm	Trans
Secure digital input/output MultiMediaCard interface (SDMMC)				
SDIO_SM_0	Periodic read-back of SDIO/SMMC configuration registers	++	X	X
SDIO_SM_1	Protocol error signals including hardware CRC	++	X	X
SDIO_SM_2	Information redundancy techniques on messages	++	X	X
Controller area network (FDCAN)				
CAN_SM_0	Periodic read-back of configuration registers	++	X	X
CAN_SM_1	Protocol error signals	++	X	X
CAN_SM_2	Information redundancy techniques on messages, including end-to-end protection.	++	X	X
USB on-the-go full-speed, USB on-the-go high-speed (OTG_FS, OTG_HS)				
USB_SM_0	Periodic read-back of configuration registers	++	X	X
USB_SM_1	Protocol error signals	++	X	X
USB_SM_2	Information redundancy techniques on messages	++	X	X
USB_SM_3	Information redundancy techniques on messages, including end-to-end protection.	+	X	X
USB Type-C® / USB Power Delivery interface (UCPD)				
UCPD_SM_0	Periodic read-back of configuration registers	++	X	X
UCPD_SM_1	Protocol error signals	++	X	X
UCPD_SM_2	UCPD state machine monitoring	++	X	X
UCPD_SM_3	Information redundancy techniques on messages, including end-to-end protection	++	X	X
Ethernet (ETH): media access control (MAC) with DMA controller				
ETH_SM_0	Periodic read-back of Ethernet configuration registers	++	X	X
ETH_SM_1	Protocol error signals including hardware CRC	++	X	X
ETH_SM_2	Information redundancy techniques on messages, including end-to-end protection	++	X	X
Extended-SPI interface (XSPI), XSPI I/O manager (XSPIIM)				
XSPI_SM_0	Periodic read-back of XSPI, XSPIIM configuration registers	++	X	X
HDMI-CEC (CEC)				
HDMI_SM_0	Periodic read-back of configuration registers	++	X	X
HDMI_SM_1	Protocol error signals	+	X	X
HDMI_SM_2	Information redundancy techniques on messages	++	X	X
Disable and periodic cross-check of unintentional activation of unused peripherals				
FFI_SM_0	Disable of unused peripherals	++	-	-
FFI_SM_1	Periodic read-back of interference avoidance registers	++	-	-
Arm®Cortex®-M7 CPU				
CoU_1	The reset condition of Arm® Cortex®. M7 CPU must be compatible as valid safe state at system level	++	-	-
Debug				
CoU_2	Device debug features must not be used in safety function(s) implementation.	++	-	-

Diagnostic	Description	Rank	Perm	Trans
Arm®Cortex®-M7 / Supply system				
CoU_3	Low-power mode state must not be used in safety function(s) implementation.	++	-	-
Device peripherals				
CoU_4	End user must implement the required combination of safety mechanism/CoUs for each STM32 peripheral used in implementation of safety function(s).	++	X	X
CPU subsystem				
CoU_7	In case of multiple safety functions implementations, methods to guarantee their mutual independence must include MPU use.	++	-	-
CoU_9.1	Any security violation event must be considered equivalent to the detection of a noncontrollable hardware random failure; accordingly, it must lead to the transition to a safe state (de-energize) at system level.	++	X	X
CoU_9.2	For each implemented safety mechanisms, related error/fault detection signal(s)/message(s) must be processed by the application software for the correct management of SS1 safe state. Related software routines must be considered as safety related in the framework of the overall policy for software systematic capability in the final system.	++	X	X
System boot (SBS)				
CoU_10.1	A combination of external watchdog and system-level measures must guarantee that the overall safe state is maintained during the boot procedure. ⁽¹²⁾	++	X	X
CoU_10.2	The End User application software can be started just after the successful execution of the following methods at the end of the boot procedure: CPU_SM_0/CPU_SM_9, MPU_SM_0, RAM_SM_5, CLK_SM_0, VSUP_SM_0, GPIO_SM_0, SYSCFG_SM_0, DIAG_SM_0, NVIC_SM_0/NVIC_SM_2. ⁽¹²⁾	++	X	X
Clock recovery system (CRS)				
CoU_8	CRS features must not be used in safety function(s) implementation.	++	-	-
System				
DUAL_SM_0	Cross-check between two STM32 devices	o	X	X

- To achieve on the single MCU local safety metrics compatible with SIL2 target, method CPU_SM_6 could be sufficient. Anyway, to understand the rationale behind "++" classification for both methods, refer to the "Recommendations" row of related description in Section 3.6: Hardware and software diagnostics for more details.
- Can be considered ranked as "+" if only one safety function is implemented and the presence of non-safety-related software is excluded.
- In case L1 caches are permanently disabled during end user application software execution, these methods can be considered ranked as "-" (no need to be executed).
- Ranking must be considered "++" for SRAM banks where no ECC is available and, therefore, RAM_SM_7 cannot be implemented.
- Must be considered ranked as "++" if Application software is executed on RAM.
- The hardware features supporting this method may be not available on each memory bank; in that case the method can be replaced by alternative measures. Refer to RAM_SM_10 description, field "Recommendations and known limitations" for further information.
- Must be applied only to embedded flash memory area hosting end user safety-related program/data.
- Methods proposed for guidance. Implementation to be decided by End User because related to other components.
- CORD_SM_1 and CORD_SM_2 can be considered mutually exclusive – to achieve SIL2 safety metrics, the end user must implement either CORD_SM_1 or CORD_SM_2.
- FMAC_SM_1 and FMAC_SM_2 can be considered as mutually exclusive. To achieve SIL2 safety metrics, the End user must implement either FMAC_SM_1 or FMAC_SM_2.
- Can be considered ranked as "o" depending on the intended use of external memory connected to FSMC.
- That is, in the time period between the system power-up and the application software correct start (after CoU_10.2 is satisfied).

The above-described safety mechanism or conditions of use are conceived with different levels of abstraction depending on their nature: the more a safety mechanism is implemented as application-independent, the wider is its possible use on a large range of *End user* applications.

The safety analysis highlights two major partitions inside the *MCU*:

- System-critical *MCU* modules
Every *End user* application is affected, from safety point of view, by a failure on these modules. Because they are used by every *End user* application, related methods or safety mechanism are mainly conceived to be application-independent. The system-critical modules on *Device* are: CPU, RCC, PWR, bus matrix and interconnect, flash memory and RAM (including their interfaces).
- Peripheral modules
Such modules could be not used by the end-user application, or they could be used for non-safety related tasks. Related safety methods are therefore implemented mainly at application level, as *Application software* solutions or architectural solutions.

4 Safety results

This section reports the results of the safety analysis of the STM32H7Rx/7Sx devices, according to IEC 61508 and to ST methodology flow, related to the hardware random and dependent failures.

4.1 Random hardware failure safety results

The analysis for random hardware failures of STM32H7Rx/7Sx devices reported in this safety manual is executed according to STMicroelectronics methodology flow for safety analysis of semiconductor devices in compliance with IEC 61508 (refer to [4] for more details). The accuracy of results obtained are guaranteed by three factors:

- STMicroelectronics methodology flow strict adherence to IEC 61508 requirements and prescriptions
- the use, during the analysis, of detailed and reliable information on microcontroller design
- the use, for specific diagnostic coverage evaluation, of state-of-the-art fault injection methods and tools for safety metrics verification

The *Device* safety analysis explored the overall and exhaustive list of *Device* failure modes, to individuate for each of them an adequate mitigation measure (safety mechanism). The overall list of *Device* failure modes is maintained in the related *FMEA* document [1], provided on demand by local STMicroelectronics sales office.

In summary, with the adoption of the safety mechanisms and conditions of use reported in [Section 3.7: Conditions of use](#), it is possible to achieve the integrity levels summarized in the following table.

Table 188. Overall achievable safety integrity levels

Number of Devices used	Safety architecture	Target	Safety analysis result
1	1oo1	SIL2 LD	Achievable
		SIL2 HD/CM	Achievable with potential performance impact ⁽¹⁾
2	1oo2	SIL3 LD	Achievable
		SIL3 HD/CM	Achievable with potential performance impact

1. Note that the potential performance impact related to some above-reported target achievements is mainly related to the need of execution of periodic software-based diagnostics (refer to safety mechanism description for details). The impact is therefore strictly related to how much "aggressive" the system level PST is (see [Section 3.3.1: Safety requirement assumptions](#)).

The resulting relative safety metrics (DC and [safe failure fraction \(SFF\)](#)) and absolute safety metrics ([probability of failure per hour \(PFH\)](#), [probability of dangerous failure on demand \(PFD\)](#)) are not reported in this section but in the [failure mode effect diagnostic analysis \(FMEDA\)](#) snapshot [2], due to:

- a large number of different STM32H7Rx/7Sx parts,
- a possibility to declare non-safety-relevant unused peripherals, and
- a possibility to enable or not the different available safety mechanisms.

The *FMEDA* snapshot [2] is a static document reporting the safety metrics computed at different detail levels (at microcontroller level and for microcontroller basic functions) for a given combination of safety mechanisms and for a given part number. If *FMEDA* document is needed, contact the local STMicroelectronics sales representative as early as possible, in order to receive information on expected delivery dates for specific *Device* target part numbers.

Note: *Safety metrics computations are restricted to STM32H7Rx/7Sx boundary, hence they do not include the WDTe, PEv, and VMOne processes described in [Section 3.3.1: Safety requirement assumptions](#).*

4.1.1 Safety analysis result customization

The safety analysis executed for STM32H7Rx/7Sx devices documented in this safety manual considers all microcontroller modules to be safety-related, thus able to interfere with the safety function, with no exclusion. This is in line with the conservative approach to be followed during the analysis of a general-purpose microcontroller, in order to be agnostic versus the final application. This means that no microcontroller module has been declared *safe* as per IEC 61508-4, 3.6.8. Therefore, all microcontroller modules are included in *SFF* computations.

In actual *End user* applications, not all the STM32H7Rx/7Sx parts or modules implement a safety function. That happens if:

- The part is not used at all (disabled), or
- The part implements functions that are not safety-related (for example, a GPIO line driving a power-on signaling light on an electronic board).

Note: Implementation of non-safety-related functions is in principle forbidden by the assumed safety requirement ASR6 (see [Section 3.3.1: Safety requirement assumptions](#)), hence under End user's entire responsibility. As any other derogation from safety requirements included in this manual, it is End user's responsibility to provide consistent rationales and evidences that the function does not bring additional risks, by following the procedure described in this section. Therefore, it is strongly recommended to reserve such derogation to very simple functions (as the one provided in the example).

Implementing safety mechanisms on such parts would be a useless effort for *End user*. The safety analysis results can therefore be customized.

End user can define a STM32H7Rx/7Sx part as *non-safety-related* based on:

- Collecting rationales and evidences that the part does not contribute to safety function.
- Collecting rationales and evidences that the part does not interfere with the safety function during normal operation, due to final system design decisions. Mitigation of unused modules is exhaustively addressed in [Section 4.1.2: General requirements for freedom from interferences \(FFI\)](#).
- Fulfilling the general condition for the mitigation of intra-MCU interferences (see [Section 4.1.2: General requirements for freedom from interferences \(FFI\)](#)).

For a *non-safety-related* part, *End user* is allowed to:

- Exclude the part from computing metrics to report in *FMEDA*, and
- Not implement safety mechanisms as listed in [Table 187. List of safety recommendations](#).

With regard to *SFF* computation, this section complies with the *no part / no effect* definition as per IEC 61508-4, 3.6.13 / 3.6.14.

4.1.2 General requirements for freedom from interferences (FFI)

A dedicated analysis has highlighted a list of general requirements to be followed in order to mitigate potential interferences between *Device* internal modules in case of internal failures (freedom from interferences, FFI). These precautions are integral part of the *Device* safety concept and they can play a relevant role when multiple microcontroller modules are declared as *non-safety-related* by *End user* as per [Section 4.1.1: Safety analysis result customization](#).

End user must implement the safety mechanisms listed in [Table 189](#) (implementation details in [Section 3.6: Hardware and software diagnostics](#)) regardless any evaluation of their contribution to safety metrics.

Table 189. List of general requirements for FFI

Diagnostic	Description
BUS_SM_0	Periodic software test for interconnections
GPIO_SM_0	Periodic read-back of configuration registers
DMA_SM_0	Periodic read-back of configuration registers
DMA_SM_2	Information redundancy by including sender or receiver identifier on data packet transferred via <i>DMA</i> ⁽¹⁾
DMA_SM_4	<i>DMA</i> transaction awareness ⁽¹⁾
NVIC_SM_0	Periodic read-back of configuration registers
NVIC_SM_1	Expected and unexpected interrupt check
FFI_SM_0	Disable of unused peripherals
FFI_SM_1	Periodic read-back of interference avoidance registers
SERC_SM_1	Detection of illegal access to unavailable peripherals

1. To be implemented only if *DMA* is actually used.

4.1.3 Notes on multiple-fault scenario

According to the requirements of IEC 61508, the safety analysis for STM32H7Rx/7Sx devices considered multiple-fault scenarios. Furthermore, following the spirit of ISO26262 (the reference and state-of-the-art standard norm for integrated circuit safety analysis), the analysis investigated possible causes preventing the implemented safety mechanisms from being effective, in order to determine appropriate counter-measures. In the *Multiple-fault protection* field, the tables in [Section 3.6: Hardware and software diagnostics](#) report the safety mechanisms required to properly manage a multiple-fault scenario, including mitigation measures against failures making safety mechanisms ineffective. It is strongly recommended that the safety concept includes such mitigation measures, and in particular for systems operating during long periods, as they tend to accumulate errors. Indeed, fault accumulation issue has been taken into account during STM32H7Rx/7Sx devices safety analysis.

Another potential source of multiple error condition is the accumulation of permanent failures during power-off periods. Indeed, if the end system is not powered, no safety mechanism are active and so able to early detect the insurgence of such failures. To mitigate this potential issue, it is strongly recommended to execute all periodic safety mechanism at each system power-up; this measure guarantees a fresh system start with a fault-free hardware. This recommendation is given for periodic safety mechanisms rated as "++" (highly recommended) in the Device safety concept, and mainly for the most relevant ones in term of failure distribution: CPU_SM_0, FLASH_SM_0, RAM_SM_0. This startup execution is strongly recommended regardless the safety functions mode of operations and/or the value of PST.

4.2 Analysis of dependent failures

The analysis of dependent failures is important for microcontroller and microprocessor devices. The main subclasses of dependent failures are CCFs. Their analysis is ruled by IEC 61508-2 annex E, which lists the design requirements to be verified to allow the use of on-chip redundancy for integrated circuits with one common semiconductor substrate.

As there is no on-chip redundancy on STM32H7Rx/7Sx devices, the CCF quantification through the β IC computation method - as described in Annex E.1, item i - is not required. Note that, in the case of 1oo2 safety architecture implementation, *End user* is required to evaluate the β and β D parameters (used in *PFH* computation) that reflect the common cause factors between the two channels.

The *Device* architecture and structures can be potential sources of dependent failures. These are analyzed in the following sections. The safety mechanisms referred to are described in [Section 3.6: Hardware and software diagnostics](#).

4.2.1 Power supply

Power supply is a potential source of dependent failures, because any alteration can simultaneously affect many modules, leading to not-independent failures. The following safety mechanisms address and mitigate those dependent failures:

- VSUP_SM_1: detection of abnormal value of supply voltage;
- VSUP_SM_2: the independent watchdog is different from the digital core of the *MCU*, and this diversity helps to mitigate dependent failures related to the main supply alterations. As reported in VSUP_SM_2 description, separate power supply for IWDG or/and the adoption of an external watchdog (CPU_SM_5) increase such diversity.
- VSUP_SM_5: power supply stability (guaranteed by system level measures) is an important mitigation factor

The adoption of such safety mechanisms is therefore highly recommended despite their minor contribution to the safety metrics to reach the required safety integrity level. Refer to [Section 3.6.7: Power controller \(PWR\)](#) for the detailed safety mechanism descriptions.

4.2.2 Clock

System clocks are a potential source of dependent failures, because alterations in the clock characteristics (frequency, jitter) can affect many parts, leading to not-independent failures. The following safety mechanisms address and mitigate such dependent failures:

- CLK_SM_1: the clock security system is able to detect hard alterations (stop) of system clock and activate the adequate recovery actions.
- CLK_SM_2: the independent watchdog has a dedicated clock source. The frequency alteration of the system clock leads to the watchdog window violations by the triggering routine on *Application software*, leading to the *MCU* reset by watchdog. The adoption of external watchdog (CPU_SM_5) provides additional diversity and so further mitigation of clock-related common cause failures.

The adoption of such safety mechanism is therefore highly recommended despite their minor contribution to the safety metrics to reach the required safety integrity level. Refer to [Section 3.6.8: Reset and clock controller \(RCC\)](#) for detailed safety mechanisms description.

4.2.3 DMA

The *DMA* function can be involved in data transfers operated by most of the peripherals. Failures of *DMA* can interfere with the behavior of the system peripherals or *Application software*, leading to dependent failures. The adoption of the following safety mechanisms is therefore highly recommended (refer to [Section 3.6.14: General purpose and high-performance direct memory access controller \(GPDMA, HPDMA\)](#) for description):

- DMA_SM_0
- DMA_SM_1
- DMA_SM_2

Note: Only *DMA_SM_0* must be implemented if *DMA* is not used for data transfer.

4.2.4 Internal temperature

The abnormal increase of the internal temperature is a potential source of dependent failures, as it can affect many *MCU* parts. The following safety mechanism mitigates this potential effect (refer to [Section 3.6.7: Power controller \(PWR\)](#) for description):

VSUP_SM_3: the internal temperature read and check allows the user to quickly detect potential risky conditions before they lead to a series of internal failures.

5 List of evidences

A *safety case database* stores all the information related to the safety analysis performed to derive the results and conclusions reported in this safety manual.

The safety case database is composed of the following:

- safety case with the full list of all safety-analysis-related documents
- STMicroelectronics' internal *FMEDA* tool database for the computation of safety metrics, including estimated and measured values
- safety report, a document that describes in detail the safety analysis executed on STM32H7Rx/7Sx devices and the compliance to IEC 61508 applicable clauses
- STMicroelectronics' internal fault injection campaign database including tool configuration and settings, fault injection logs and results, related to the *MCU* modules for which fault injection is adopted as verification method.

As these resources contain STMicroelectronics confidential information, they are only available for the purpose of audit and inspection by authorized bodies, without being published, which conforms to Note 2 of IEC 61508-2, 7.4.9.7.

Important: The combination of this document (safety manual), the [1] and [2] documents, the [4] provides per se an exhaustive view of the rationales for the compliance to IEC 61508 requirements of the whole STM32 safety concept. All these documents are available under NDA and they can be shared with certification entities (refer to applicable NDA for details).


Appendix A X-CUBE-STL self-test software library

The X-CUBE-STL (also referred as "STL" in this document) is a Software-based diagnostic library designed to detect random hardware failures in STM32 safety-critical core components (*CPU* + *SRAM*). It is provided by STMicroelectronics to simplify the implementation of STM32 *MCU* safety concept, by offering a pre-certified brick addressing the most challenging *MCU* functions.

X-CUBE-STL implements a set of of key safety mechanisms described in this Safety Manual:

- **CPU_SM_0** Periodic core self-test software for *CPU*.
- **RAM_SM_5** Periodic integrity test for application software in *RAM*
- **RAM_SM_0** Periodic software test for static random access memory (*SRAM*)

Figure 6. STL architecture

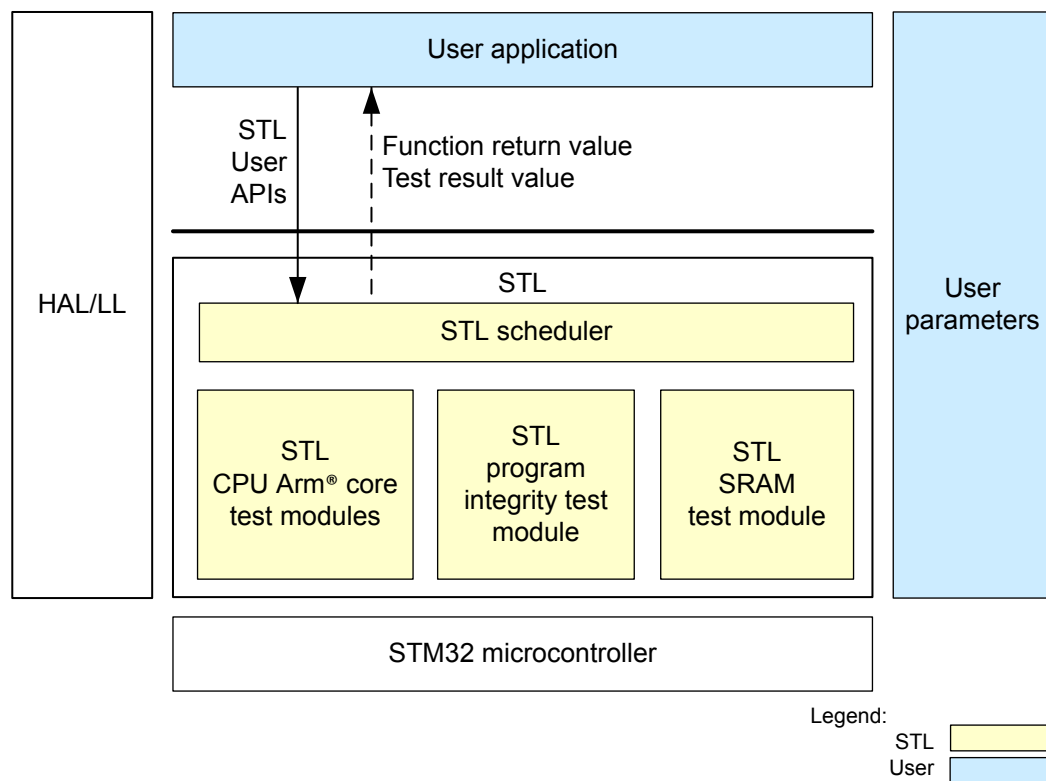

X-CUBE-STL characteristics:

- Partitioned into Test Modules to ease its coexistence with end user application software
- Provided with a Scheduler function to simplify the periodic execution of the tests
- *SRAM* test area can be partitioned in programmable sections to reduce the time for the execution of atomic test sections
- Application independent: can be used in potentially any end-user application
- It can be interrupted at practically any time by the end user application; the few critical sections are automatically protected by an interrupt disable function
- Compiler independent: delivered as object code
- Independence: designed as HAL-, BSP- and CMSIS-agnostic (there are no dependencies from these software packages)
- Compatible with most popular safe RTOS (white papers/application notes on integration with safe RTOS are available)
- Portability: the X-CUBE-STL shares the same APIs set across all the STM32 *MCU* Series, so projects portability across STM32 portfolio is guaranteed
- Provided with exhaustive end user documentation: safety manual and user guide

- Diagnostic coverage verified by state-of-the-art ST proprietary fault injection methodology
 - Development flow compliant to SC3 systematic capability requirements from IEC 61508
 - Certified by TÜV Rheinland (certification covers claims related to achieved DC and SC3 development flow)
- X-CUBE-STL is available on demand under *NDA* agreement (contact your local ST representative).

Revision history

Table 190. Document revision history

Date	Revision	Changes
06-Feb-2025	1	Initial release.
16-Dec-2025	2	Updated: <ul style="list-style-type: none"> • Table 7. CPU_SM_4 • Table 8. CPU_SM_5 • Table 9. CPU_SM_6 • Table 57. DBG_SM_0 • Table 85. FSMC_SM_3 • Table 184. FFI_SM_0 • Table 187. List of safety recommendations • Table 189. List of general requirements for FFI

Glossary

Application software Within the software executed by *Device*, the part that ensures functionality of *End user's* application and integrates safety functions

ASR assumed safety requirement

CCF Common cause failure

CM Continuous mode

Compliant item Any item subject to claim with respect to the clauses of IEC 61508 series of standards

COTS Commercial off-the-shelf

CoU Conditions of use

CPU Central processing unit

CRC Cyclic redundancy check

DC Diagnostic coverage

Device Depending on the context, any single silicon product or the entirety of the silicon products pertaining to this document

DMA Direct memory access

DTI Diagnostic test interval

End user Individual person or company who integrates *device* in their application such as an electronic control board

EUC Equipment under control

FIT Failure in time

FMEA Failure mode and effect analysis - a process of reviewing components, assemblies, and subsystems to identify potential failure modes in a system and their causes and effects

FMEDA Failure mode effect diagnostic analysis

HD High-demand

HFT Hardware fault tolerance

HW Hardware

ITRS International technology roadmap for semiconductors

LD Low-demand

MCU Microcontroller unit

MPU Memory protection unit

MTBF Mean time between failures

MTTFd Mean time to dangerous failure

NDA Nondisclosure agreement

PEc Computation processing elements

PEi Input processing elements

PEo Output processing elements

PEv Voting processing element

PFD Probability of dangerous failure on demand

PFH Probability of failure per hour

PL Performance level

PST Process safety time

SFF Safe failure fraction

SIL Safety integrity level

SoC System on chip

VMONe Voltage monitors

WDTe Watchdog

Contents

1	About this document	2
1.1	Purpose and scope	2
1.2	Normative references	2
1.3	Reference documents	2
2	Device development process	3
3	Reference safety architecture	4
3.1	Safety architecture introduction	4
3.2	Compliant item	4
3.2.1	Definition of Compliant item	4
3.2.2	Safety functions performed by Compliant item	4
3.2.3	Reference safety architectures - 1oo1	5
3.2.4	Reference safety architectures - 1oo2	6
3.3	Safety analysis assumptions	7
3.3.1	Safety requirement assumptions	7
3.4	Electrical specifications and environment limits	8
3.5	Systematic safety integrity	9
3.6	Hardware and software diagnostics	9
3.6.1	Arm® Cortex®-M7 CPU	10
3.6.2	System bus architecture/BusMatrix	17
3.6.3	Embedded SRAM	18
3.6.4	Embedded flash memory	24
3.6.5	External flash memory	28
3.6.6	Memory cipher engine (MCE)	32
3.6.7	Power controller (PWR)	33
3.6.8	Reset and clock controller (RCC)	36
3.6.9	System configuration, boot, and security (SBS)	37
3.6.10	Clock recovery system (CRS)	37
3.6.11	General-purpose input/output (GPIO)	38
3.6.12	Debug system or peripheral control	40
3.6.13	System configuration controller (SYSCFG)	41
3.6.14	General purpose and high-performance direct memory access controller (GPDMA, HPDMA)	42
3.6.15	Chrom-Art Accelerator controller (DMA2D)	44
3.6.16	Chrom-GRC™, Neo-Chrom graphic processor, ICACHE (GFXMMU, GPU2D)	46
3.6.17	Extended interrupt and events controller (EXTI)	47
3.6.18	Cyclic redundancy-check calculation unit (CRC)	49

3.6.19	CORDIC co-processor (CORDIC)	50
3.6.20	Filter math accelerator (FMAC)	52
3.6.21	Flexible static memory controller (FSMC)	54
3.6.22	Octo-SPI interface (OCTOSPI)	56
3.6.23	Delay block (DLYB)	57
3.6.24	Analog-to-digital converter (ADC)	58
3.6.25	Digital temperature sensor (DTS)	61
3.6.26	Voltage reference buffer (VREFBUF)	61
3.6.27	Multi-function digital filter (MDF), Audio digital filter (ADF)	62
3.6.28	Digital camera interface pixel pipeline (DCMIPP)	64
3.6.29	Parallel synchronous slave interface (PSSI)	65
3.6.30	LCD-TFT display controller (LTDC)	66
3.6.31	JPEG codec (JPEG)	67
3.6.32	HASH processor (HASH)	68
3.6.33	On-the-fly decryption engine (OTFDEC)	69
3.6.34	Public key accelerator (PKA)	71
3.6.35	True random number generator (RNG)	72
3.6.36	Advanced encryption standard hardware accelerator/Secure AES coprocessor (AES/SAES)	73
3.6.37	Cryptographic processor (CRYP)	75
3.6.38	Advanced-control/General-purpose/High resolution and low-power timers	76
3.6.39	Basic timers	80
3.6.40	Independent and system window watchdogs (IWDG and WWDG)	81
3.6.41	Real-time clock module (RTC)	82
3.6.42	Tamper and backup registers (TAMP)	84
3.6.43	Inter-integrated circuit (I2C, I3C)	84
3.6.44	Universal synchronous/asynchronous receiver/transmitter and low power universal asynchronous receiver/transmitter (USART, UART, LPUART)	87
3.6.45	Serial peripheral interface (SPI)	90
3.6.46	Serial audio interface (SAI)	92
3.6.47	SPDIF receiver interface (SPDIFRX)	94
3.6.48	Management data input/output (MDIOS)	95
3.6.49	Secure digital input/output MultiMediaCard interface (SDMMC)	97
3.6.50	Controller area network (FDCAN)	98
3.6.51	USB on-the-go full-speed, USB on-the-go high-speed (OTG_FS, OTG_HS)	101
3.6.52	USB Type-C® / USB Power Delivery interface (UCPD)	103
3.6.53	Ethernet (ETH): media access control (MAC) with DMA controller	105
3.6.54	Extended-SPI interface (XSPI), XSPI I/O manager (XSPIM)	106
3.6.55	HDMI-CEC (CEC)	107

3.6.56	Graphic timer (GFXTIM)	108
3.6.57	Disable and periodic cross-check of unintentional activation of unused peripherals	109
3.6.58	System	110
3.7	Conditions of use	111
4	Safety results	120
4.1	Random hardware failure safety results	120
4.1.1	Safety analysis result customization	120
4.1.2	General requirements for freedom from interferences (FFI)	121
4.1.3	Notes on multiple-fault scenario	122
4.2	Analysis of dependent failures	122
4.2.1	Power supply	122
4.2.2	Clock	122
4.2.3	DMA	123
4.2.4	Internal temperature	123
5	List of evidences	124
Appendix A	X-CUBE-STL self-test software library	125
	Revision history	127
	Glossary	128

List of tables

Table 1.	Document sections versus IEC 61508-2 Annex D safety requirements	2
Table 2.	SS1 and SS2 safe state details	8
Table 3.	CPU_SM_0	10
Table 4.	CPU_SM_1	11
Table 5.	CPU_SM_2	12
Table 6.	CPU_SM_3	12
Table 7.	CPU_SM_4	13
Table 8.	CPU_SM_5	14
Table 9.	CPU_SM_6	14
Table 10.	CPU_SM_7	15
Table 11.	CPU_SM_9	15
Table 12.	CPU_SM_10	16
Table 13.	MPU_SM_0	16
Table 14.	MPU_SM_1	17
Table 15.	BUS_SM_0	17
Table 16.	BUS_SM_1	18
Table 17.	RAM_SM_0	18
Table 18.	RAM_SM_2	19
Table 19.	RAM_SM_3	20
Table 20.	RAM_SM_4	21
Table 21.	RAM_SM_5	21
Table 22.	RAM_SM_6	22
Table 23.	RAM_SM_7	22
Table 24.	RAM_SM_8	23
Table 25.	RAM_SM_10	23
Table 26.	FLASH_SM_0	24
Table 27.	FLASH_SM_1	25
Table 28.	FLASH_SM_2	25
Table 29.	FLASH_SM_3	26
Table 30.	FLASH_SM_4	26
Table 31.	FLASH_SM_6	27
Table 32.	FLASH_SM_7	27
Table 33.	FLASH_SM_8	28
Table 34.	FLASH_SM_9	28
Table 35.	EXTMEM_SM_0	29
Table 36.	EXTMEM_SM_1	29
Table 37.	EXTMEM_SM_2	30
Table 38.	EXTMEM_SM_4	30
Table 39.	EXTMEM_SM_6	31
Table 40.	EXTMEM_SM_9	31
Table 41.	MCE_SM_0	32
Table 42.	MCE_SM_1	32
Table 43.	MCE_SM_2	33
Table 44.	VSUP_SM_0	33
Table 45.	VSUP_SM_1	34
Table 46.	VSUP_SM_2	34
Table 47.	VSUP_SM_3	35
Table 48.	VSUP_SM_5	35
Table 49.	CLK_SM_0	36
Table 50.	CLK_SM_1	36
Table 51.	CLK_SM_2	37
Table 52.	CLK_SM_3	37
Table 53.	GPIO_SM_0	38

Table 54.	GPIO_SM_1	38
Table 55.	GPIO_SM_2	39
Table 56.	GPIO_SM_3	39
Table 57.	DBG_SM_0	40
Table 58.	LOCK_SM_0	40
Table 59.	SYSCFG_SM_0	41
Table 60.	DIAG_SM_0	41
Table 61.	DMA_SM_0	42
Table 62.	DMA_SM_1	42
Table 63.	DMA_SM_2	43
Table 64.	DMA_SM_3	43
Table 65.	DMA_SM_4	44
Table 66.	DMA2D_SM_0	44
Table 67.	DMA2D_SM_1	45
Table 68.	DMA2D_SM_2	45
Table 69.	GFX_SM_0	46
Table 70.	NVIC_SM_0	47
Table 71.	NVIC_SM_1	48
Table 72.	NVIC_SM_2	49
Table 73.	CRC_SM_0	49
Table 74.	CORD_SM_0	50
Table 75.	CORD_SM_1	50
Table 76.	CORD_SM_2	51
Table 77.	CORD_SM_3	51
Table 78.	FMAC_SM_0	52
Table 79.	FMAC_SM_1	52
Table 80.	FMAC_SM_2	53
Table 81.	FMAC_SM_3	53
Table 82.	FSMC_SM_0	54
Table 83.	FSMC_SM_1	54
Table 84.	FSMC_SM_2	55
Table 85.	FSMC_SM_3	55
Table 86.	QSPI_SM_0	56
Table 87.	QSPI_SM_1	56
Table 88.	QSPI_SM_2	57
Table 89.	DLB_SM_0	57
Table 90.	ADC_SM_0	58
Table 91.	ADC_SM_1	58
Table 92.	ADC_SM_2	59
Table 93.	ADC_SM_3	60
Table 94.	ADC_SM_4	60
Table 95.	DTS_SM_0	61
Table 96.	VREF_SM_0	61
Table 97.	VREF_SM_1	62
Table 98.	MDF_SM_0	62
Table 99.	MDF_SM_1	62
Table 100.	MDF_SM_2	63
Table 101.	DCMI_SM_0	64
Table 102.	DCMI_SM_1	64
Table 103.	PSSI_SM_0	65
Table 104.	PSSI_SM_1	65
Table 105.	LCD_SM_0	66
Table 106.	LCD_SM_1	66
Table 107.	JPEG_SM_0	67
Table 108.	JPEG_SM_1	67

Table 109.	JPEG_SM_2	68
Table 110.	HASH_SM_0	68
Table 111.	HASH_SM_1	69
Table 112.	OTFDEC_SM_0	69
Table 113.	OTFDEC_SM_1	70
Table 114.	OTFDEC_SM_2	70
Table 115.	OTFDEC_SM_3	71
Table 116.	PKA_SM_0	71
Table 117.	PKA_SM_1	72
Table 118.	RNG_SM_0	72
Table 119.	RNG_SM_1	73
Table 120.	AES_SM_0	73
Table 121.	AES_SM_1	74
Table 122.	AES_SM_2	74
Table 123.	CRYP_SM_0	75
Table 124.	CRYP_SM_1	75
Table 125.	CRYP_SM_2	76
Table 126.	ATIM_SM_0	76
Table 127.	ATIM_SM_1	77
Table 128.	ATIM_SM_2	78
Table 129.	ATIM_SM_3	79
Table 130.	ATIM_SM_4	79
Table 131.	GTIM_SM_0	80
Table 132.	GTIM_SM_1	80
Table 133.	WDG_SM_0	81
Table 134.	WDG_SM_1	81
Table 135.	RTC_SM_0	82
Table 136.	RTC_SM_1	82
Table 137.	RTC_SM_2	83
Table 138.	RTC_SM_3	83
Table 139.	TAMP_SM_0	84
Table 140.	IIC_SM_0	84
Table 141.	IIC_SM_1	85
Table 142.	IIC_SM_2	85
Table 143.	IIC_SM_3	86
Table 144.	IIC_SM_4	86
Table 145.	UART_SM_0	87
Table 146.	UART_SM_1	87
Table 147.	UART_SM_2	88
Table 148.	UART_SM_3	89
Table 149.	SPI_SM_0	90
Table 150.	SPI_SM_1	90
Table 151.	SPI_SM_2	91
Table 152.	SPI_SM_3	91
Table 153.	SPI_SM_4	92
Table 154.	SAI_SM_0	92
Table 155.	SAI_SM_1	93
Table 156.	SAI_SM_2	93
Table 157.	SPDF_SM_0	94
Table 158.	SPDF_SM_1	94
Table 159.	SPDF_SM_2	95
Table 160.	MDIO_SM_0	95
Table 161.	MDIO_SM_1	96
Table 162.	MDIO_SM_2	96
Table 163.	SDIO_SM_0	97

Table 164.	SDIO_SM_1	97
Table 165.	SDIO_SM_2	98
Table 166.	CAN_SM_0	98
Table 167.	CAN_SM_1	99
Table 168.	CAN_SM_2	100
Table 169.	USB_SM_0	101
Table 170.	USB_SM_1	101
Table 171.	USB_SM_2	102
Table 172.	USB_SM_3	102
Table 173.	UCPD_SM_0	103
Table 174.	UCPD_SM_1	103
Table 175.	UCPD_SM_2	104
Table 176.	UCPD_SM_3	104
Table 177.	ETH_SM_0	105
Table 178.	ETH_SM_1	105
Table 179.	ETH_SM_2	106
Table 180.	XSPI_SM_0	106
Table 181.	HDMI_SM_0	107
Table 182.	HDMI_SM_1	107
Table 183.	HDMI_SM_2	108
Table 184.	FFI_SM_0	109
Table 185.	FFI_SM_1	109
Table 186.	DUAL_SM_0	110
Table 187.	List of safety recommendations	111
Table 188.	Overall achievable safety integrity levels	120
Table 189.	List of general requirements for FFI	121
Table 190.	Document revision history	127

List of figures

Figure 1.	STMicroelectronics product development process	3
Figure 2.	STM32 as <i>Compliant item</i>	4
Figure 3.	1oo1 reference architecture	5
Figure 4.	1oo2 reference architecture	6
Figure 5.	Allocation and target for STM32 <i>PST</i>	7
Figure 6.	STL architecture	125

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics International NV and its affiliates (“ST”) reserve the right to make changes corrections, enhancements, modifications, and improvements to ST products and/or to this document any time without notice.

This document is provided solely for the purpose of obtaining general information relating to an ST product. Accordingly, you hereby agree to make use of this document solely for the purpose of obtaining general information relating to the ST product. You further acknowledge and agree that this document may not be used in or in connection with any legal or administrative proceeding in any court, arbitration, agency, commission or other tribunal or in connection with any action, cause of action, litigation, claim, allegation, demand or dispute of any kind. You further acknowledge and agree that this document shall not be construed as an admission, acknowledgment or evidence of any kind, including, without limitation, as to the liability, fault or responsibility whatsoever of ST or any of its affiliates, or as to the accuracy or validity of the information contained herein, or concerning any alleged product issue, failure, or defect. ST does not promise that this document is accurate or error free and specifically disclaims all warranties, express or implied, as to the accuracy of the information contained herein. Accordingly, you agree that in no event will ST or its affiliates be liable to you for any direct, indirect, consequential, exemplary, incidental, punitive, or other damages, including lost profits, arising from or relating to your reliance upon or use of this document.

Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment, including, without limitation, the warranty provisions thereunder.

In that respect, note that ST products are not designed for use in some specific applications or environments described in above mentioned terms and conditions.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

Information furnished is believed to be accurate and reliable. However, ST assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved