

Tape and reel shipping media for STM8 and STM32 microcontrollers in SO packages

Introduction

SO packages can be supplied in tape and tube shipping media.

The reels have a 13" typical diameter.

The types of reel used are in plastic either anti static or conductive, with a black conductive cavity tape. The cover tape is transparent anti static or conductive.

The devices are positioned in the cavities with the identifying pin (normally Pin "1") on the same side as the sprocket holes in the tape.

STMicroelectronics tape and reels are compliant with EIA 481 and IEC 60286-3 standard specifications.

[Table 1](#) lists the SO packages available for STM8 and STM32 microcontrollers, as well as the corresponding shipping media.

Table 1. SO packages available in tape and reel packing

Package	Description	Package code	Reel diameter	Tape width	Tape pitch
SO-8	SO 08 0.15 JEDEC	O7	13"	12 mm	8mm
SO-16	SO 16 0.15 TO JEDEC MS-012	Q7		16 mm	8 mm
SO-16W	SO 16 0.30 LARGE JEDEC MS-013	Y7		16 mm	12 mm
SO-20	SO 20 0.30 TO JEDEC MS-013	Z7		24 mm	12 mm
SO-24	SO 24 0.30 TO JEDEC MS-013AD	9U		24 mm	12 mm
SO-28	SO 28 0.30 TO JEDEC MS-013AE	LR		24 mm	12 mm
SO-34S	SO 34 SHRINK 7.5 mm	SG		24 mm	12 mm

Contents

1	Reel description	5
2	Leader and trailer tape specifications	7
3	Labeling	8
4	Device orientation	9
5	Carrier tape mechanical dimensions	10
6	Bending radius requirements	12
7	Camber requirements	13
8	Revision history	14

List of tables

Table 1. SO packages available in tape and reel packing 1
Table 2. Reel dimensions 6
Table 3. Carrier tape constant dimensions 10
Table 4. Carrier tape variable dimensions 11
Table 5. Document revision history 14

List of figures

Figure 1.	Reel diagram	5
Figure 2.	Leader and trailer tape schematics.	7
Figure 3.	Labeling location on reel for carrier tape	8
Figure 4.	Device orientation on tape	9
Figure 5.	Embossed carrier tape	10
Figure 6.	Bending radius requirements	12
Figure 7.	Camber requirements	13

1 Reel description

Figure 1. Reel diagram

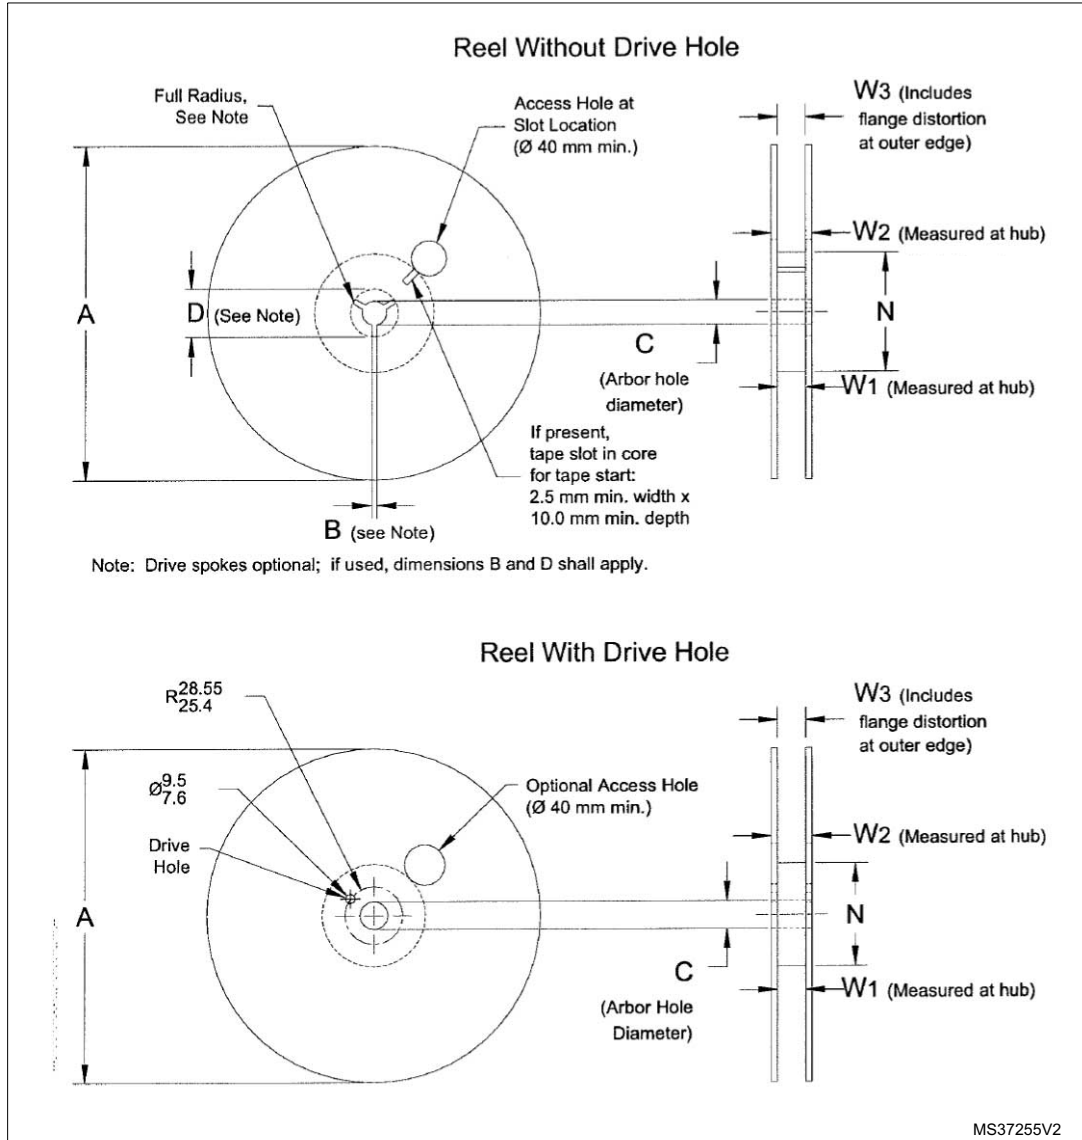


Table 2. Reel dimensions⁽¹⁾

Reel size (inch)	Tape size (mm)	A max. (mm)	Reeds without drive hole			Reeds with drive hole			N (mm)	W1 (mm) ⁽²⁾	W2 max. (mm)
			B min. (mm)	C (mm)	D min. (mm)	B min. (mm)	C max. (mm)	D min. (mm)			
13	12	330	1.5	13.0+0.5/-0.2	20.2	NA	29.2	NA	100	12.4+2/-0	18.4
									178±5		
	16								100	16.4+2/-0	22.4
									178±5		
	24								100	24.4+2/-0	30.4
									178±5		

1. NA stands for "not applicable".
2. W1 is measured at the hub.


2 Leader and trailer tape specifications

The leader has a minimum width of 400 mm which includes at least 100 mm of carrier tape with empty cavities and sealed cover tape (see [Figure 2](#)). The leader tape is affixed to the last turn of carrier tape by using a transparent adhesive anti static or paper based tape of a width not higher than the one of the cover tape.

The trailer is a carrier tape which minimum width is 160 mm with empty cavities and sealed cover tape, as shown in [Figure 2](#). The trailer tape must be affixed to the reel by using the tape slot of the reel hub.

During the unwinding operation, the entire carrier tape must be easily released from the reel hub as the last portion of the tape unwinds from the reel without damaging the carrier tape and the remaining components in the cavities.

Figure 2. Leader and trailer tape schematics

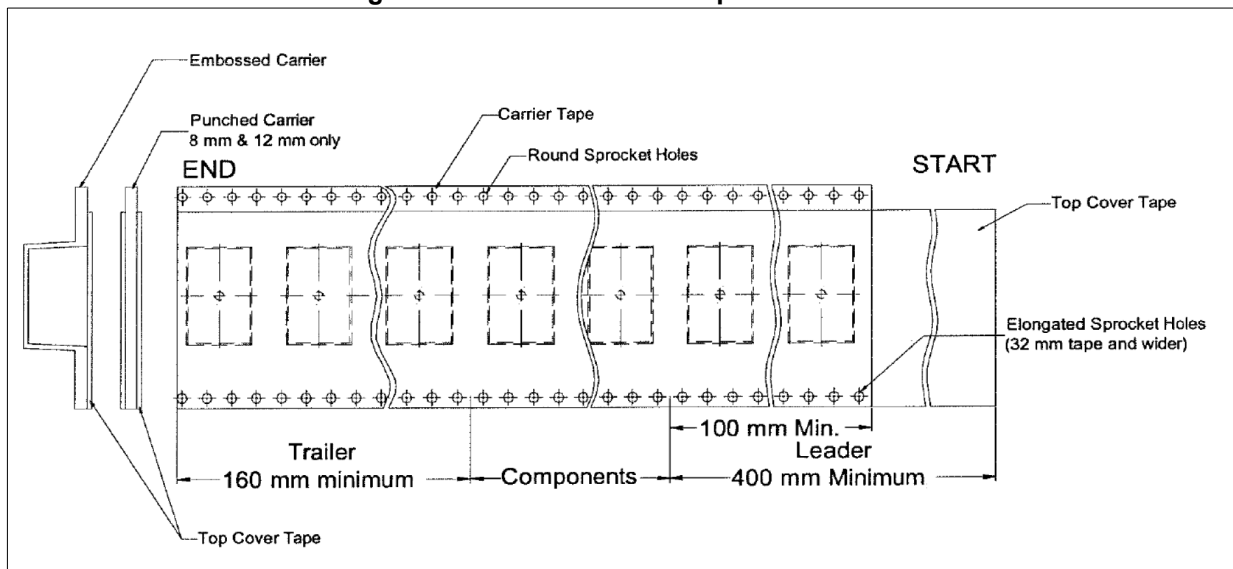


3 Labeling

STMicroelectronics “inner box” standard label is placed on each reel at the following locations:

- On the box that directly holds the reel
- On the damp proof bag if the units are dry packed
- On the reel itself

The label is attached to the flange that is facing the user when the tape is extracted from the reel at the top right (see [Figure 3](#)).

Figure 3. Labeling location on reel for carrier tape

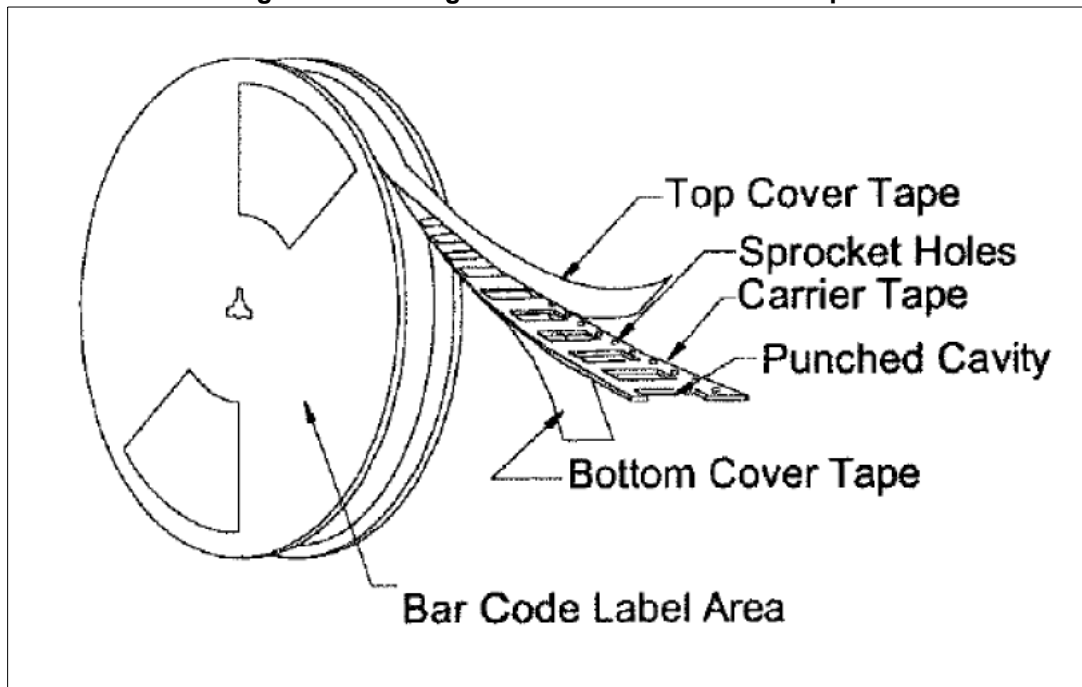


4 Device orientation

The largest axis of the component outline is perpendicular to the tape length.

The device is positioned in the carrier tape cavity as shown in [Figure 4: Device orientation on tape](#). Pin 1 is located on the top left corner of the package.

Figure 4. Device orientation on tape

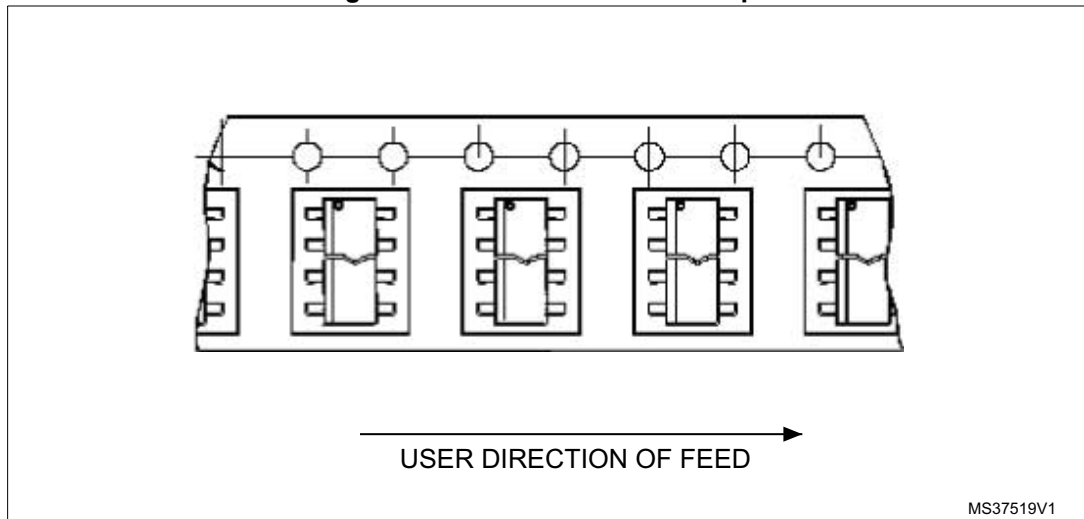

5 Carrier tape mechanical dimensions

Possible widths are 12, 16 and 24 mm (refer to [Table 1: SO packages available in tape and reel packing](#)).

Figure 5. Embossed carrier tape

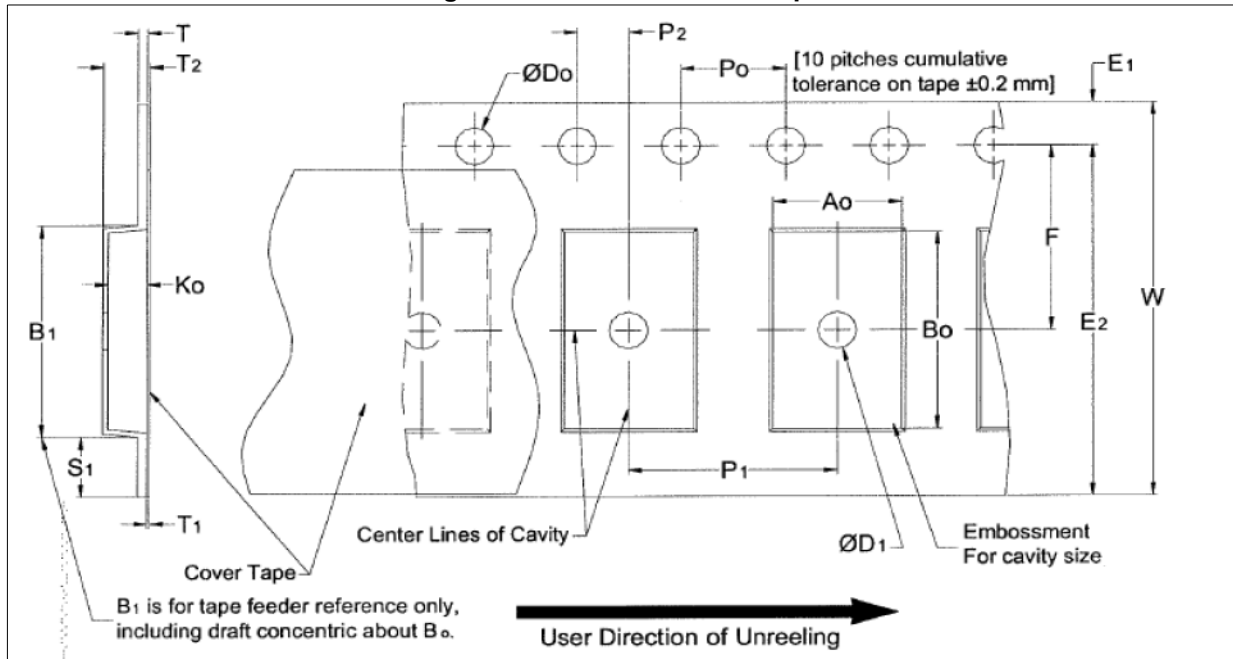


Table 3. Carrier tape constant dimensions

Tape width	D0	D1 min	E1	P0	P2	R ⁽¹⁾	S1	T max.	T1 max.	Unit
12 mm	1.5+0.1 /-0.0	1.5	1.75±0.1	4.0±0.1	2.0±0.05	30	0.6	0.6	0.1	mm
16 mm					2.0±0.1					
24 mm					2.0±0.1					

1. The maximum radius the tape with or without components can bend without damage is specified in [Section 6: Bending radius requirements](#).


Table 4. Carrier tape variable dimensions

Tape width	B1	E2	F	P1	T2 max.	W max.	A0, B0, K0	Unit
12 mm	8.2	10.25	5.5±0.05	2.0±0.05 or 4.0±0.1 or 8.0±0.1	6.5	12.3	See ⁽¹⁾	mm
16 mm	12.1	14.25	7.5±0.1	4.0±0.1 to 12.0±0.1 by 4.0 increments	8.0	16.3		
24 mm	20.1	22.25	11.5±0.1	4.0±0.1 to 20.0±0.1 by 4.0 increments	12.0	24.3		

1. The cavity defined by A0, B0 and K0 surrounds the component with sufficient clearance so that:
- The component does not protrude above the top surface of the carrier tape.
 - The component can be removed vertically from the cavity without mechanical restriction, after the top cover tape has been removed.
 - Rotation of the component is limited to 20° maximum for 12 mm tapes and to 10° maximum for 16 mm and 24mm tapes.
 - Lateral movements of the component are restricted to 0.5 mm maximum for 12 mm tapes and to 1.0 mm maximum for 16 mm and 24 mm tapes.

6 Bending radius requirements


Figure 6. Bending radius requirements

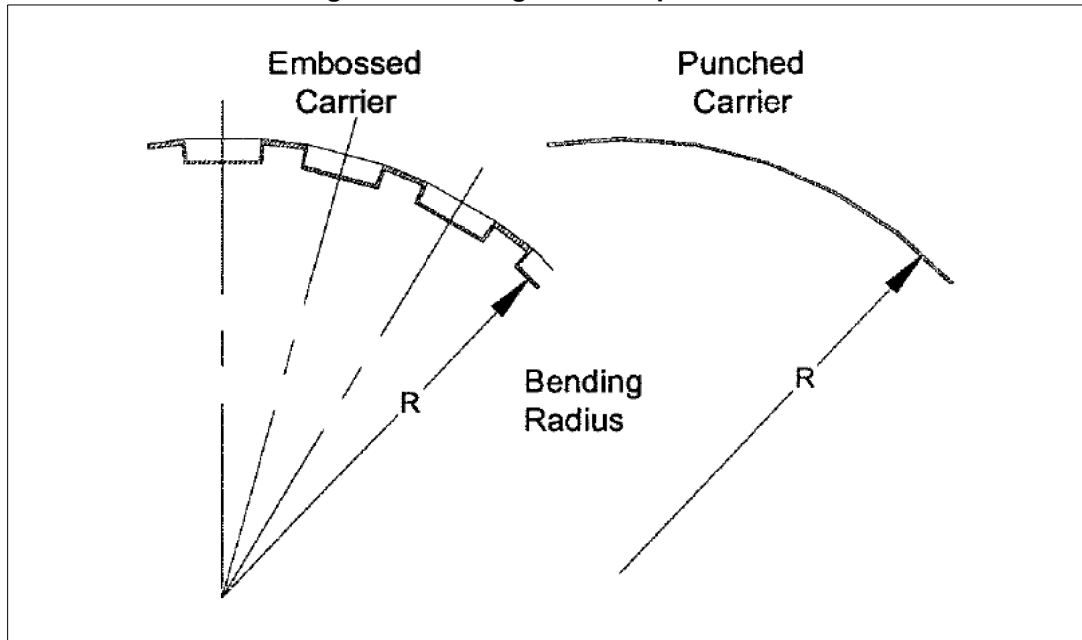

7 Camber requirements

Carrier camber should not exceed more than 1 mm in 250 mm of carrier tape length.

Figure 7. Camber requirements

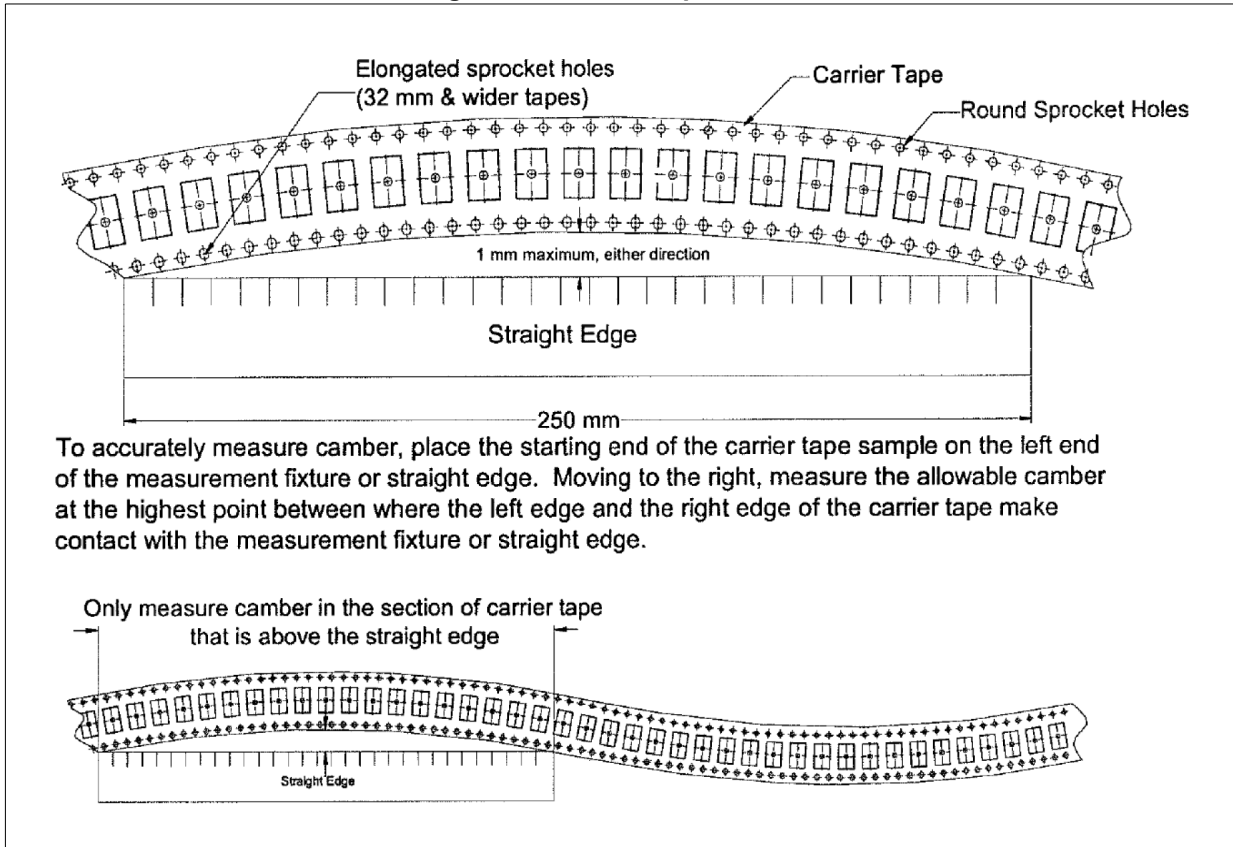

8 Revision history

Table 5. Document revision history

Date	Revision	Changes
12-Mar-2015	1	Initial release.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2015 STMicroelectronics – All rights reserved

