


Automotive 300 V, 10 A high efficiency ultrafast diode



Features

- AEC-Q101 qualified
- Ultrafast recovery
- Low power losses
- High surge capability
- Low leakage current
- High junction temperature
- ECOPACK2 compliant



Applications

- DC/DC converter
- Reverse battery protection
- Battery management system
- Audio amplification

Description

This **STTH1003S-Y** is an ultrafast recovery power rectifier dedicated to energy recovery in automotive applications.

This **STTH1003S-Y** is also intended for the clamping function in an energy recovery block.

The compromise between forward voltage drop and recovery time offers optimized performances.

Product status links

[STTH1003S-Y](#)

Product summary

$I_{F(AV)}$	10 A
V_{RRM}	300 V
$T_{j(max.)}$	175 °C
$V_F(typ.)$	0.9 V
$T_{rr(max.)}$	13 ns

1 Characteristics

Table 1. Absolute ratings (limiting values, at 25 °C, unless otherwise specified)

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive peak reverse voltage, $T_j = -40\text{ °C to }+175\text{ °C}$	300	V
$I_{F(RMS)}$	Forward rms current	20	A
$I_{F(AV)}$	Average forward current, $\delta = 0.5$, square wave	$T_C = 150\text{ °C}$ 10	A
I_{FSM}	Surge non repetitive forward current	$t_p = 10\text{ ms sinusoidal}$ 100	A
T_{stg}	Storage temperature range	-65 to +175	°C
T_j	Operating junction temperature range	-40 to +175	°C

Table 2. Thermal parameters

Symbol	Parameter	Maximum value	Unit
$R_{th(j-c)}$	Junction to case	4	°C/W

For more information, refer to the following application note :

- AN5088: Rectifiers thermal management, handling and mounting recommendations

Table 3. Static electrical characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$I_R^{(1)}$	Reverse leakage current	$T_j = 25\text{ °C}$	-		10	μA
		$T_j = 125\text{ °C}$	-	10	100	
$V_F^{(2)}$	Forward voltage drop	$T_j = 25\text{ °C}$	-		1.30	V
		$T_j = 125\text{ °C}$	-	0.90	1.10	

1. Pulse test: $t_p = 5\text{ ms}$, $\delta < 2\%$

2. Pulse test: $t_p = 380\text{ }\mu\text{s}$, $\delta < 2\%$

To evaluate the conduction losses, use the following equation:

$$P = 0.86 \times I_{F(AV)} + 0.024 \times I_F^2 (RMS)$$

For more information, refer to the following application notes related to the power losses:

- AN604: Calculation of conduction losses in a power rectifier
- AN5028: Calculation of turn-off power losses generated by an ultrafast diode

Table 4. Dynamic electrical characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
t_{rr}	Reverse recovery time	$T_j = 25\text{ °C}$ $I_F = 0.5\text{ A}$, $I_{rr} = 0.25\text{ A}$, $I_R = 1\text{ A}$	-	13	17	ns
		$I_F = 1\text{ A}$, $V_R = 30\text{ V}$, $dI_F/dt = -50\text{ A}/\mu\text{s}$	-	28	35	
I_{RM}	Reverse recovery current	$T_j = 125\text{ °C}$ $I_F = 10\text{ A}$, $V_R = 200\text{ V}$, $dI_F/dt = 200\text{ A}/\mu\text{s}$	-	5.7	7.5	A
S_{factor}	Softness factor		-	0.3		-
t_{fr}	Forward recovery time	$T_j = 25\text{ °C}$ $I_F = 10\text{ A}$, $V_{FR} = 1.1 \times V_{Fmax}$, $dI_F/dt = 100\text{ A}/\mu\text{s}$			200	ns
V_{FP}	Forward recovery voltage			2.5	3.5	V

Related links

[AN5088: Rectifiers thermal management, handling and mounting recommendations](#)

[AN604: Calculation of conduction losses in a power rectifier](#)

[AN5028: Calculation of turn-off power losses generated by a ultrafast diode](#)

1.1 Characteristics (curves)

Figure 1. Forward voltage drop versus current (maximum values)

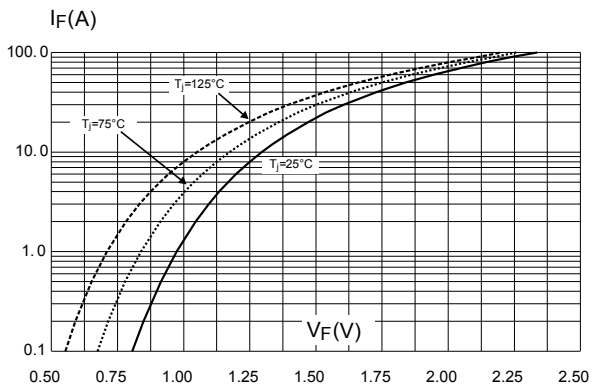


Figure 2. Peak reverse recovery current versus di_F/dt (90% confidence)

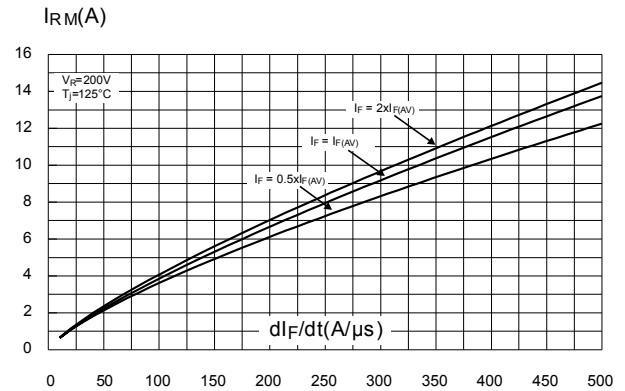


Figure 3. Reverse recovery time versus di_F/dt (90 % confidence)

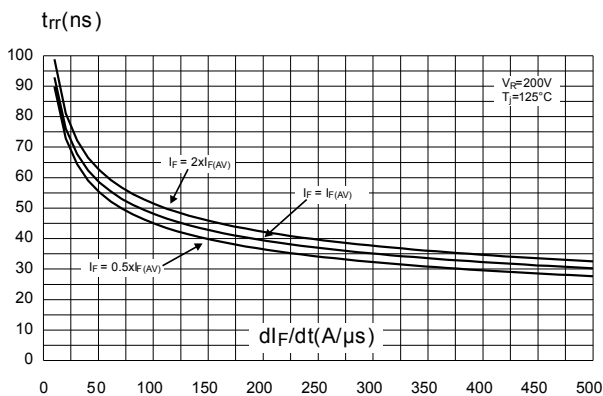


Figure 4. Softness factor versus di_F/dt (typical values)

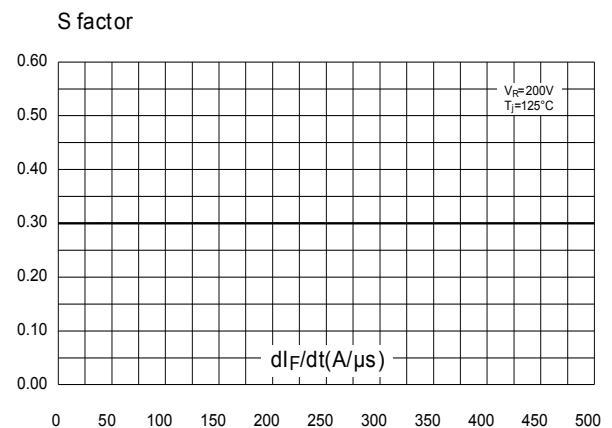


Figure 5. Relative variations of dynamic parameters versus junction temperature (reference: $T_j = 125^\circ\text{C}$)

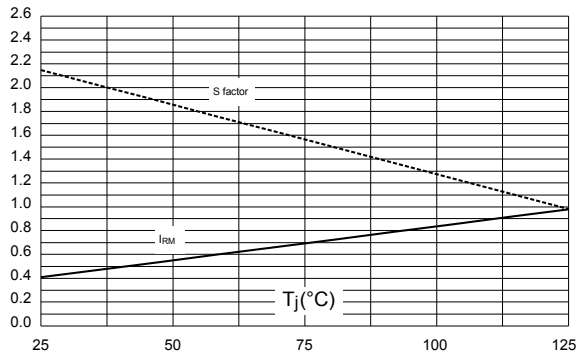


Figure 6. Transient peak forward voltage versus dl_F/dt (90% confidence)

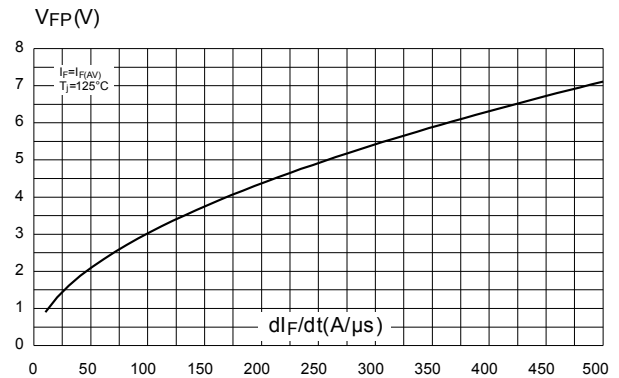


Figure 7. Forward recovery versus dl_F/dt (90% confidence)


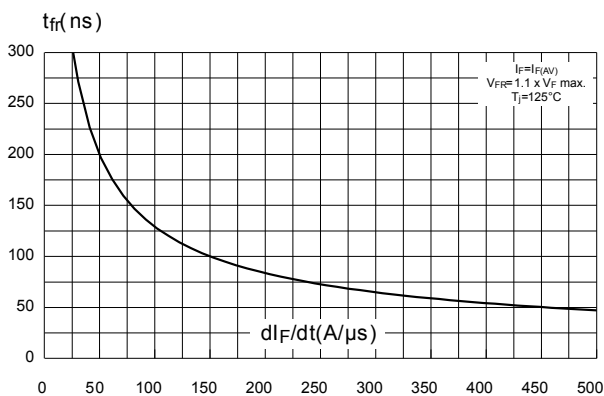


Figure 8. Thermal resistance junction to ambient versus copper surface under tab (typical values)

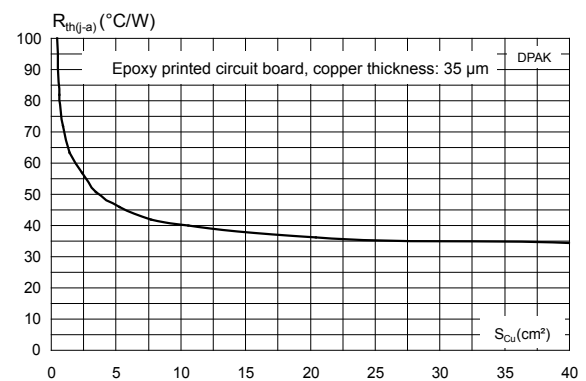


2 Package information

To meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: www.st.com. ECOPACK is an ST trademark.

2.1 DPAK package information

- Epoxy meets UL94, V0

Figure 9. DPAK package outline

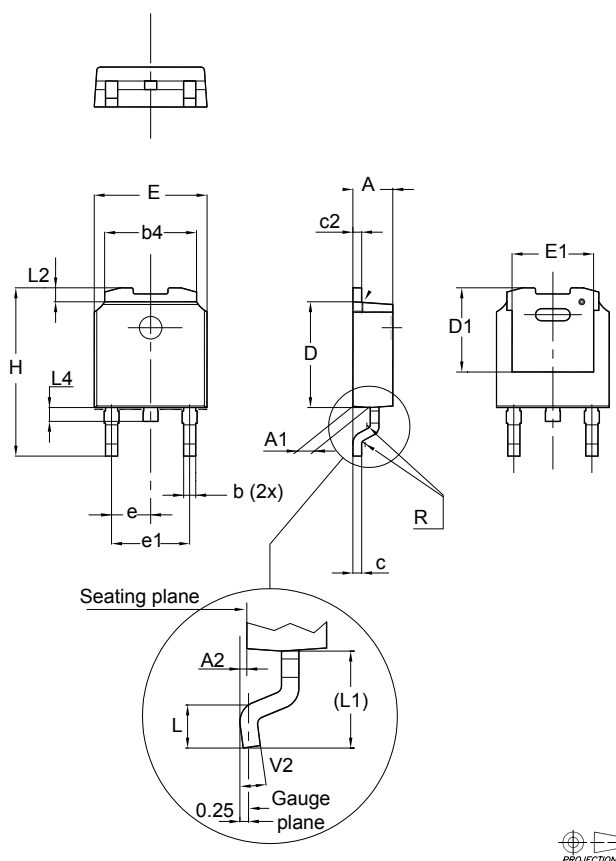


Note: This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

Table 5. DPAK mechanical data

Dim.	Dimensions					
	Millimeters			Inches ⁽¹⁾		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.20		2.40	0.087		0.094
A1	0.90		1.10	0.035		0.043
A2	0.03		0.23	0.001		0.009
b	0.64		0.90	0.025		0.035
b4	5.20		5.40	0.205		0.213
c	0.45		0.60	0.018		0.024
c2	0.48		0.60	0.019		0.024
D	6.00		6.20	0.236		0.244
D1	4.95	5.10	5.25	0.195	0.201	0.207
E	6.40		6.60	0.252		0.260
E1	4.60	4.70	4.80	0.181	0.185	0.189
e	2.159	2.286	2.413	0.085	0.090	0.095
e1	4.445	4.572	4.699	0.175	0.180	0.185
H	9.35		10.10	0.368		0.398
L	1.00		1.50	0.039		0.059
(L1)	2.60	2.80	3.00	0.102	0.110	0.118
L2	0.65	0.80	0.95	0.026	0.031	0.037
L4	0.60		1.00	0.024		0.039
R		0.20			0.008	
V2	0°		8°	0°		8°

1. Inches dimensions given for reference only

Figure 10. DPAK recommended footprint (dimensions are in mm)

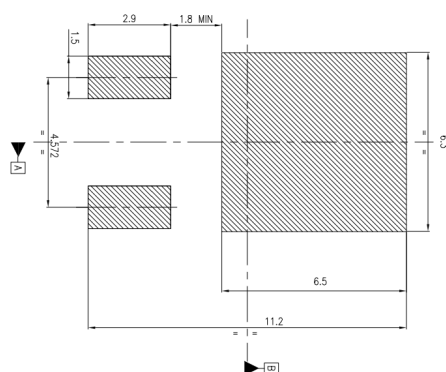

Note: For package and tape orientation, reel and inner box dimensions and tape outline please check [TN1173](#)



3 Ordering information

Table 6. Order code

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STTH1003SBY-TR	TH10 03SBY	DPAK	0.32 g	2500	Tape and reel

Revision history

Table 7. Document revision history

Date	Revision	Changes
24-Oct-2012	1	Initial release.
28-Jan-2019	2	Added <i>Section Applications</i> . Updated <i>Table 6</i> . Added <i>Figure 8</i> .
03-Jun-2024	3	Updated package view on cover page.
25-Jun-2025	4	Updated Table 4 . Dynamic electrical characteristics .

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved