


### Automotive 1 A - 1200 V ultrafast rectifier



#### **Features**



- Very low conduction losses
- Negligible switching losses
- Low forward and reverse recovery times
- High junction temperature
- ECOPACK2 or ECOPACK3 compliant component on demand

### **Description**



The device is also intended for use as a free-wheeling diode in power supplies and other power switching applications in automotive K functions.



#### Product status link

STTH112-Y

Product summary			
I <sub>F(AV)</sub>	1 A		
V <sub>RRM</sub>	1200 V		
T <sub>j</sub> (max.)	175 °C		
V <sub>F</sub> (typ.)	1.1 V		
T <sub>rr</sub> (typ.)	53 ns		



### 1 Characteristics

Table 1. Absolute ratings (limiting values at T<sub>i</sub>= 25 °C, unless otherwise specified)

Symbol	Parameter	Value	Unit	
V <sub>RRM</sub>	Repetitive peak reverse voltage, T <sub>j</sub> = -40 °C to +175 °C	1200	V	
I <sub>F(AV)</sub>	Average forward current $T_L = 135  ^{\circ}\text{C}  \delta = 0.5$		1	Α
I <sub>FSM</sub>	Forward surge current $t_p = 8.3 \text{ ms}$		18	Α
T <sub>stg</sub>	Storage temperature range	-65 to + 175	°C	
T <sub>j</sub> <sup>(1)</sup>	Operating temperature range	-40 to + 175	°C	

<sup>1.</sup>  $(dP_{tot}/dT_j) < (1/R_{th(j-a)})$  condition to avoid thermal runaway for a diode on its own heatsink.

Table 2. Thermal resistance

Symbol	Parameter	Value	Unit
R <sub>th(j-l)</sub>	Junction to lead	20	°C/W

For more information, you can refer to the following application note related to the thermal management:

AN5088: Rectifiers thermal management, handling and mounting recommendations

Table 3. Static electrical characteristic

Symbol	Parameter	Test co	nditions	Min.	Тур.	Max.	Unit
I <sub>R</sub> <sup>(1)</sup> Reverse leakage current	T <sub>j</sub> = 25 °C	V <sub>R</sub> = V <sub>RRM</sub>	-		5	μA	
	T <sub>j</sub> = 125 °C		-	1	50		
V <sub>F</sub> <sup>(2)</sup> Forward voltage drop	Forward voltage drop	T <sub>j</sub> = 25 °C	I <sub>F</sub> = 1 A	-		1.9	V
	i diwaru voitage drop	T <sub>j</sub> = 150 °C	IF - 1 A	-	1.10	1.55	V

<sup>1.</sup> Pulsetest:  $tp = 5 \text{ ms}, \ \delta < 2\%$ 

To evaluate the conduction losses use the following equation:

 $P = 1.25 \text{ x } I_{F(AV)} + 0.330 I_{F^2(RMS)}$ 

For more information, you can refer to the following application notes related to the power losses:

- AN604: Calculation of conduction losses in a power rectifier
- AN4021: Calculation of reverse losses on a power diode

**Table 4. Dynamic electrical characteristics** 

Symbol	Parameter	Test conditions		Min.	Тур.	Max.	Unit
t <sub>rr</sub>	Reverse recovery time	T <sub>j</sub> = 25 °C	$I_F = 0.5 A;$ $I_{rr} = 0.25 A;$ $I_R = 1 A$	-	53	75	ns
t <sub>fr</sub>	Forward recovery time		I <sub>F</sub> = 1 A;	-		500	
V <sub>FP</sub>	Forward recovery voltage	T <sub>j</sub> = 25 °C	$dI_{F/dt} = 50 \text{ A/}\mu\text{s};$ $V_{FR} = 4.50 \text{ V}$	-	20	30	V

DS10171 - Rev 3 page 2/8

<sup>2.</sup> Pulsetest:  $tp = 380 \mu s$ ,  $\delta < 2\%$ 



### 1.1 Electrical characteristics (curves)

Figure 1. Average forward power dissipation versus average forward current

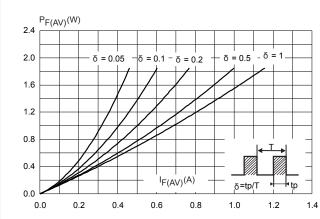


Figure 2. Forward voltage drop versus forward current (typical values)

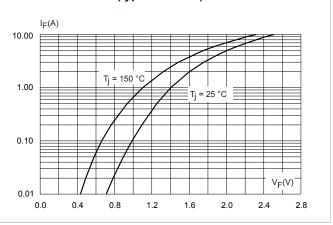


Figure 3. Forward voltage drop versus forward current (maximum values)

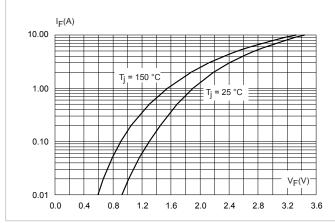


Figure 4. Relative variation of thermal impedance junction to lead versus pulse duration

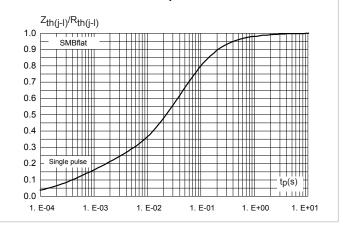


Figure 5. Junction capacitance versus reverse voltage applied (typical values)


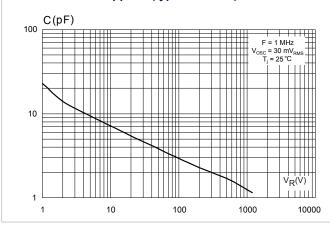


Figure 6. Thermal resistance junction to ambient versus copper surface under each lead

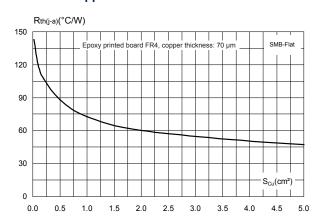

DS10171 - Rev 3 page 3/8



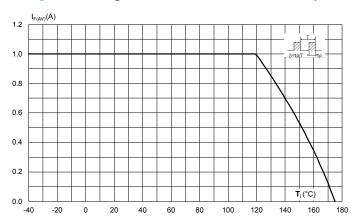


Figure 7. Average forward current versus lead temperature

DS10171 - Rev 3 page 4/8




## Package information

To meet environmental requirements, ST offers these devices in different grades of ECOPACK packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions, and product status are available at: www.st.com. ECOPACK is an ST trademark.

### 2.1 SMB Flat package information

- Epoxy meets UL94, V0
- · Lead-free package

Figure 8. SMB Flat package outline

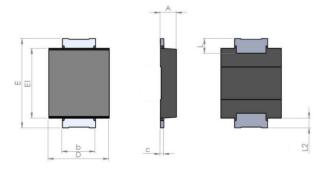


Note: Note: This package drawing may slightly differ from the physical package. However, all the specified dimensions are guaranteed.

**Dimensions** Ref. Millimeters Inches Min. Max. Min. Тур. Max. Тур. 0.90 1.10 0.035 0.043 Α 2.20 0.077 0.087 b 1.95 0.15 0.40 0.006 0.016 С 3.30 3.95 0.130 0.156 D 5.60 0.200 0.220 Е 5.10 4.05 4.60 0.159 0.181 E1 0.75 1.50 0.030 0.060 L L2 0.60 0.024

Table 5. SMB Flat mechanical data

Figure 9. Footprint recommendations, dimensions in mm (inches)



DS10171 - Rev 3 page 5/8



# 3 Ordering information

Order code	Marking	Package	Weight	Base qty.	Delivery mode
STTH112UFY	F112Y	SMBflat	50 mg	5000	Tape and reel

DS10171 - Rev 3 page 6/8



## **Revision history**

Table 6. Document revision history

Date	Version	Changes
04-Feb-2014	1	Initial release.
18-Mar-2022	2	Updated Section 2.1 SMB Flat package information.
27-May-2025	3	Updated Table 1, and added Figure 7.

DS10171 - Rev 3 page 7/8



#### **IMPORTANT NOTICE - READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to <a href="https://www.st.com/trademarks">www.st.com/trademarks</a>. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved

DS10171 - Rev 3 page 8/8