



ST23YT66


Smartcard MCU with USB and SPI interfaces and 66 KBytes EEPROM

Data brief

Features

Hardware features

- Enhanced 8/16-bit ST23 CPU core with 16 Mbytes linear addressable memory
- 210 Kbytes of User ROM
- 6.2 Kbytes of User RAM
- 2 Kbytes of NESCRIPT RAM
- 66 Kbytes of User EEPROM including 128 bytes of User OTP area:
 - Highly reliable CMOS EEPROM submicron technology
 - 30-year data retention
 - 500,000 Erase/Write cycles endurance typical at 25° C
 - 1 to 64 bytes Erase or Program in 1.5 ms
- Enhanced NESCRIPT crypto-processor for public key cryptography
- Hardware security enhanced DES accelerator
- Three 8-bit timers with watchdog and interrupt capability
- 3V to 5.5V supply voltage range
- 0 to 70 °C operating range
- High performance provided by:
 - CPU clock frequency up to 29 MHz
- Power-saving Standby state
- 10-MHz Master Serial Peripheral Interface (SPI) bus
- USB hardware accelerator for AutoPlay
- 12 GPIO pins
 - 7 bidirectional input/output pins
 - 5 unidirectional input pins

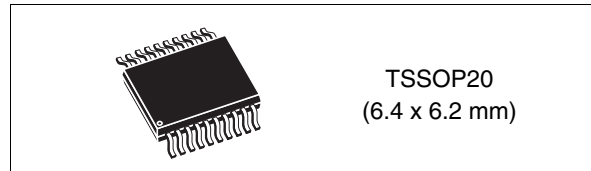

- Full-speed USB 2.0 interface
 - 8 Endpoints
 - 2 x 16 bytes (EP0)
 - 2 x 16 bytes for INT transfer (EP1)
 - 2x64 bytes for In/Out Bulk and INT transfer (EP2)
 - 2x64 bytes for In/Out Bulk and INT transfer (with hardware accelerator) (EP3)
 - Clock recovery
- ESD protection greater than 5 kV (HBM) for all pads and 2 kV for XIN and XOUT pads

Security features

- Active shield
- Monitoring of environmental parameters
- Protection mechanisms against faults
- AIS-31 class P2 compliant true random number generator (TRNG)
- ISO 3309 CRC calculation block
- Memory protection unit (MPU)
- Unique serial number on each die

Development environment

- Software development and firmware generation are supported by a comprehensive set of development tools dedicated to software design and validation:
 - C compiler and emulator

Applications

ST23YT66 major applications include:

- Pay TV applications
- Secure Internet/computer applications

1 Description

The ST23YT66 product is a serial access microcontroller specially designed for secure smartcard applications.

It is based on an enhanced STMicroelectronics 8/16-bit CPU core offering 16 Mbytes linear addressing space. It is manufactured using an advanced highly reliable ST CMOS EEPROM technology.

The ST23YT66 is a secure USB microcontroller based on the ST23 core architecture. Its high security level and versatile communication interfaces address user identification functions for computer or network access or for computer-based local or remote applications.

The ST23YT66 features a USB full-speed interface for communication with computers as well as various I/Os and an SPI bus for user interfaces (keyboards, displays, etc.).


The ST23YT66 USB hardware accelerator provides a very efficient AutoPlay mode implementation. This enables the content of a companion serial Flash memory to be uploaded to a computer at a speed close to USB bandwidth.

In order to meet environmental requirements, ST (also) offers these devices in ECOPACK® packages. ECOPACK® packages are lead-free. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label.

ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.



Figure 1. ST23YT66 block diagram

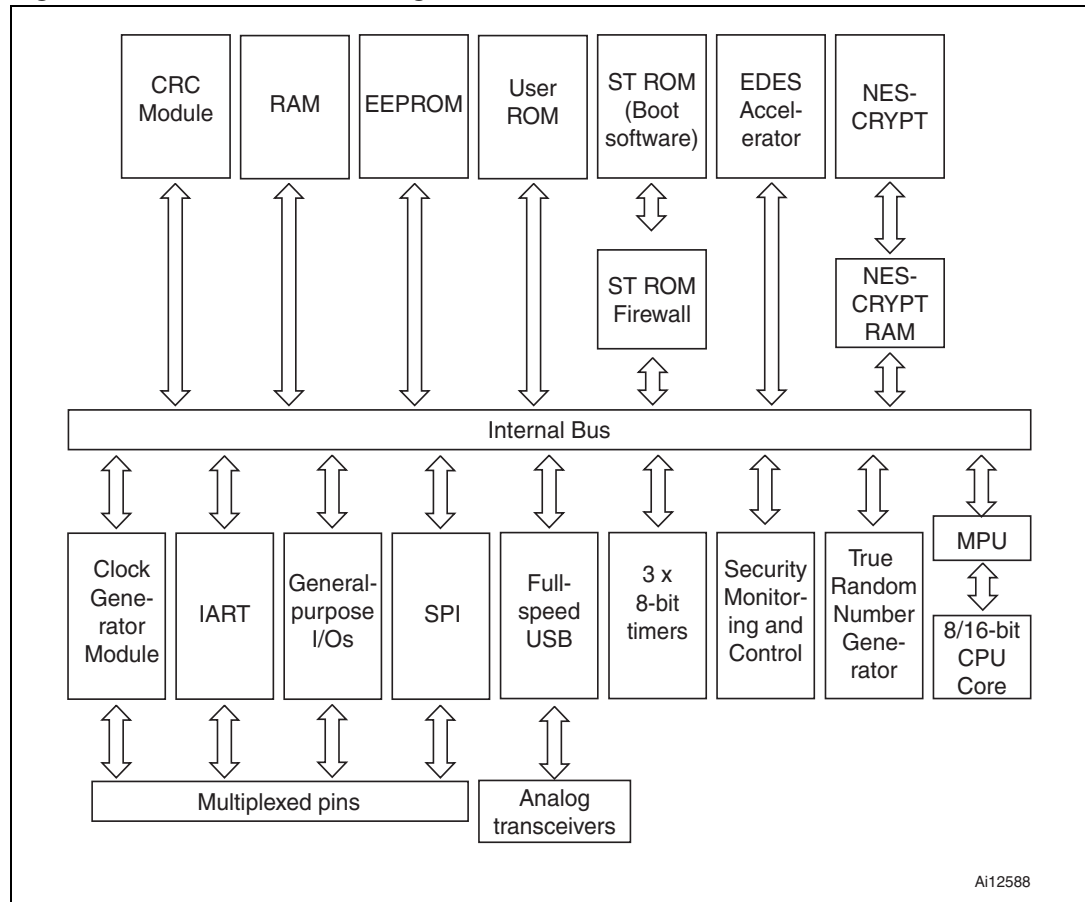

1.1 Development environment

Development tools for smartcard products include a complete range of hardware systems and software tools from STMicroelectronics and third-party tool suppliers. The range of tools includes solutions to help you to develop and debug your application and evaluate smartcard products and their peripherals.

An Integrated Development Environment (IDE), the ST Visual Develop (STVD), provides a set of tools for developing embedded applications. This interface manages the project configuration, code edition, code generation and program debugging.

A Smartcard ICS emulator (SCICS) is available for developing and validating your application code.

All the information needed to generate the application code and personalization will be collected in a delivery file (.DLV extension). This file is created using the Delivery menu of the STMicroelectronics configuration software tool, SCPOOL.

2 Revision history

Table 1. Document revision history

Date	Revision	Changes
24-Oct-2008	1	First release.
17-Dec-2010	2	Removed "Obsolete" watermark.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2010 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com