

## Discovery kit for the ST25R200 high performance NFC device



### Features

- On-board NFC card reader IC:ST25R200
- Operating modes: Reader/Writer
- ISO 14443A, ISO 14443B and ISO15693 compliant general-purpose NFC device
- Supports NFC Forum T1T, T2T, T4T, and T5T tag types
- Possibility of driving two antennas in a single-ended configuration
- RC low-power wake-up
- Five 13.56 MHz inductive antennas etched on the PCB and associated tuning circuits
- Two tag boards with the chip soldered and the antenna etched on PCB with its associated tuning circuit. Two sticker tags
- A board dedicated to the STLINK in-circuit debugger and programmer for the STM32
- Free comprehensive firmware library compatible with STM32Cube and examples for ST25R200
- CE, UKCA, FCC, ISED certified
- RoHS and WEEE compliant

### Description

The **STEVAL-25R200SA** is a ready-to-use kit based on the **ST25R200** high-performance NFC device for contactless applications.

The kit allows the user to evaluate the **ST25R200** features and functionality in the reader/writer modes.

Presented in the form of a single divisible card (**STEVAL-25R200AA**) the kit consists of two boards: a main board, which embeds the **ST25R200** device and an STM32G0 MCU.

Eight boards are breakable allowing evaluation of various combinations.

A companion board, which includes an STLINK in-circuit debugger and programmer for the STM32.

An antenna 20x20 mm etched on the PCB with its tuning circuit.

The complementary antennas are designed for testing various topologies, which can be substituted for the main NFC antenna.

A hub with two 12 x 12 mm tuned antennas for evaluating the **ST25R200** dual antenna feature.

A board tuned for being connected to the flexible antenna is delivered with the kit.

A board is tuned for being connected to any 50-ohm NFC antenna is available on the market.

The tag boards for reader and tag system evaluation are a board, which embeds a ST25TV with its tuned 10 x 5 mm antenna and a board, which embeds a ST25TN with its tuned 10 x 5 mm antenna.

The stickers tags for easy **ST25R200** reader system evaluation.

Product summary	
Discovery kit for the ST25R200 high performance NFC device	<b>STEVAL-25R200SA</b>
PC software installer for STEVAL-25R200SA board	<b>STSW-ST25R019</b>
Powerful general-purpose NFC reader for consumer and industrial applications	<b>ST25R200</b>
Antenna Matching Tool	<b>STSW-ST25R004</b>
Windows® PC software for ISO15693, ISO14443-A/B, NFC and industrial readers	<b>STSW-ST25PC001</b>
Applications	<b>NFC</b>

A connector is present on all modules for a quick and robust connection to the system core. It is based on the [ST25R200](#) and the STM32, which includes hardware and software tools that enable using the entire STM32 ecosystem.

This board is powered through a micro-USB connector.

Thanks to several combinations that can be performed, this kit helps the users develop and test their applications.

The kit is FCC certified, with FCC ID: YCPR200AD1. It is also IC certified, with IC: 8976A-R200AD1; PMN: STEVAL-25R200A; HVIN: STEVAL-25R200A.

## 1

**Figure 1. STEVAL-25R200SA main board circuit schematic (1 of 7)**

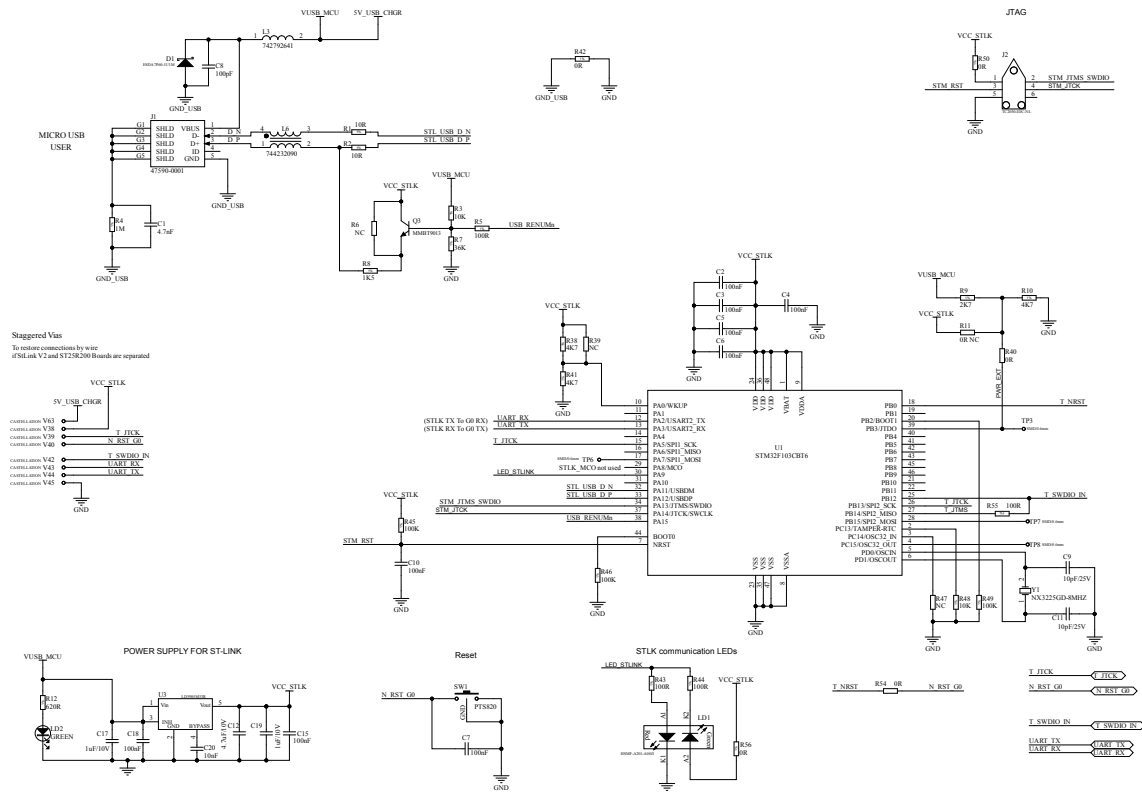




Figure 3. STEVAL-25R200SA main board circuit schematic (3 of 7)

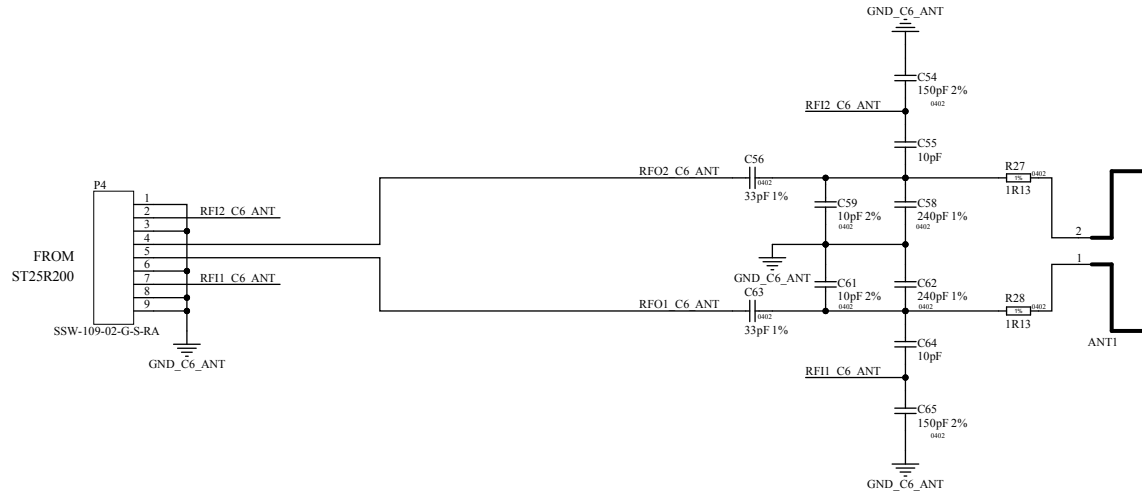


Figure 4. STEVAL-25R200SA main board circuit schematic (4 of 7)

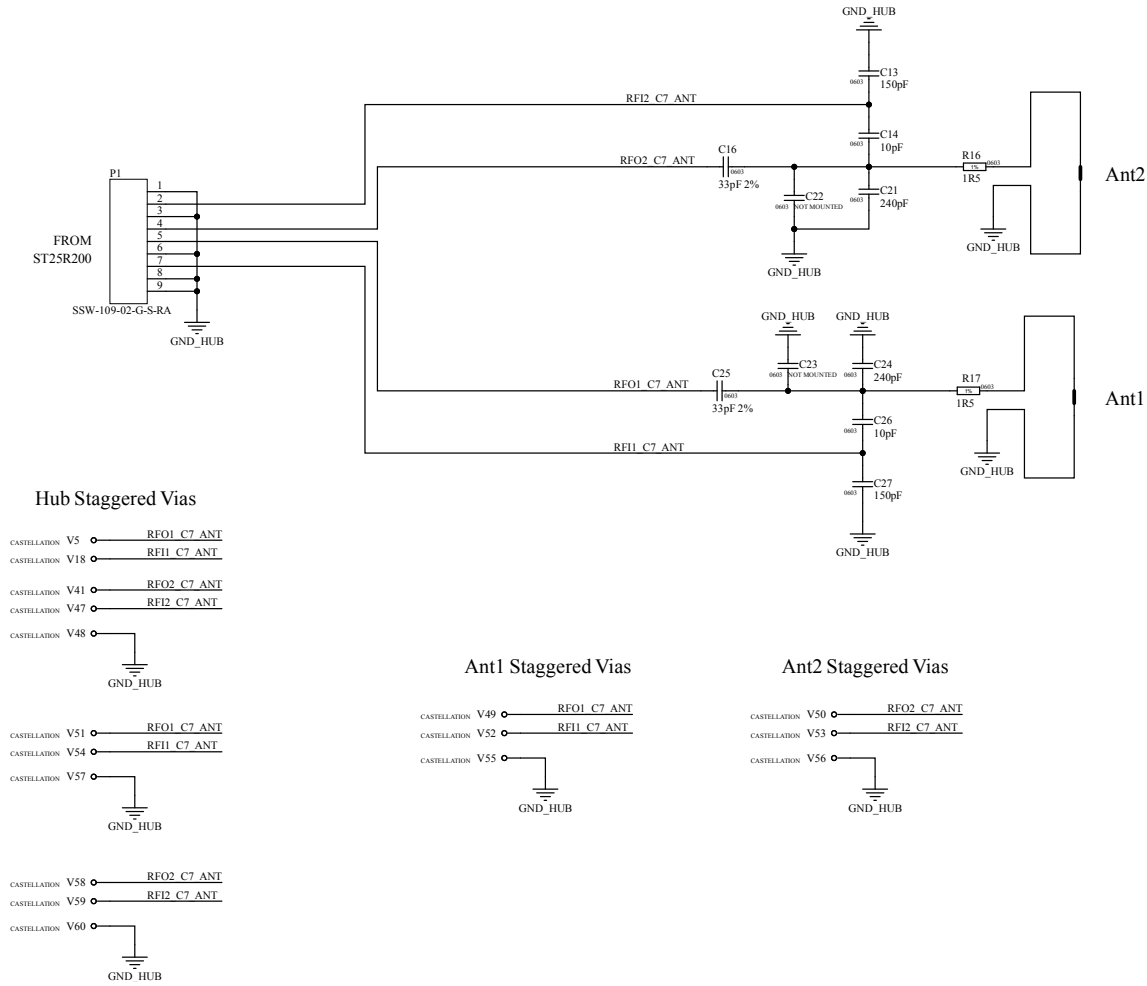


Figure 5. STEVAL-25R200SA main board circuit schematic (5 of 7)



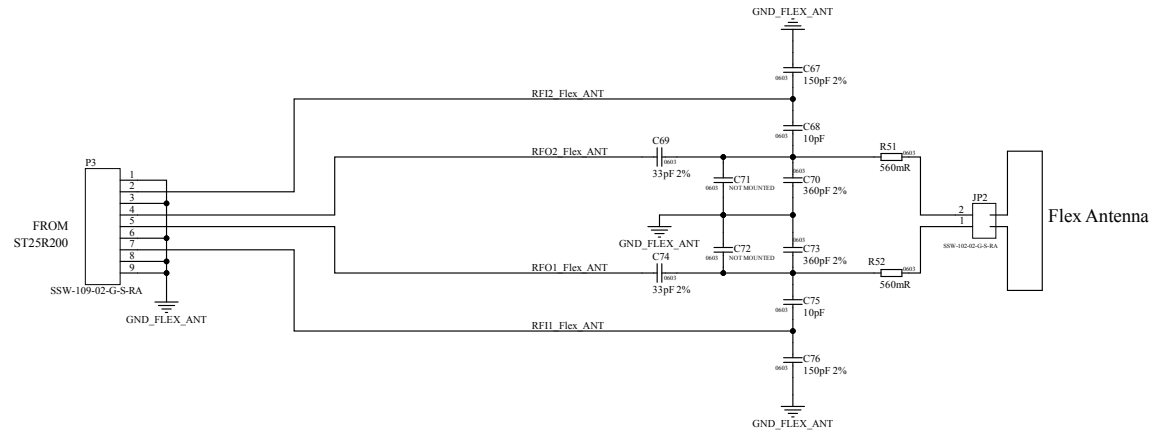


Figure 6. STEVAL-25R200SA main board circuit schematic (6 of 7)



**Figure 7. STEVAL-25R200SA main board circuit schematic (7 of 7)**

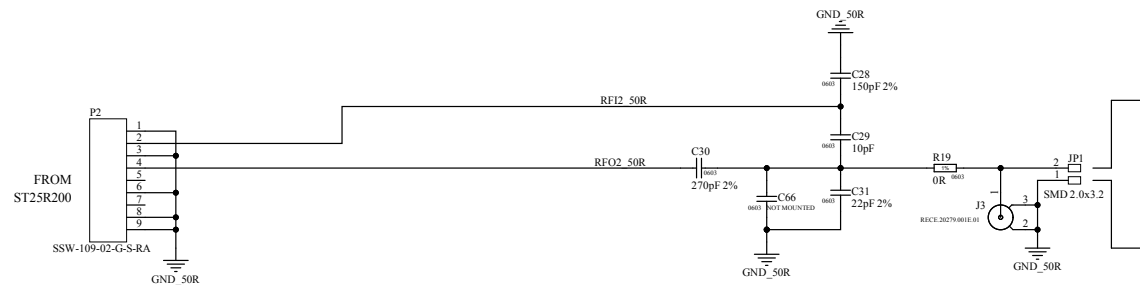

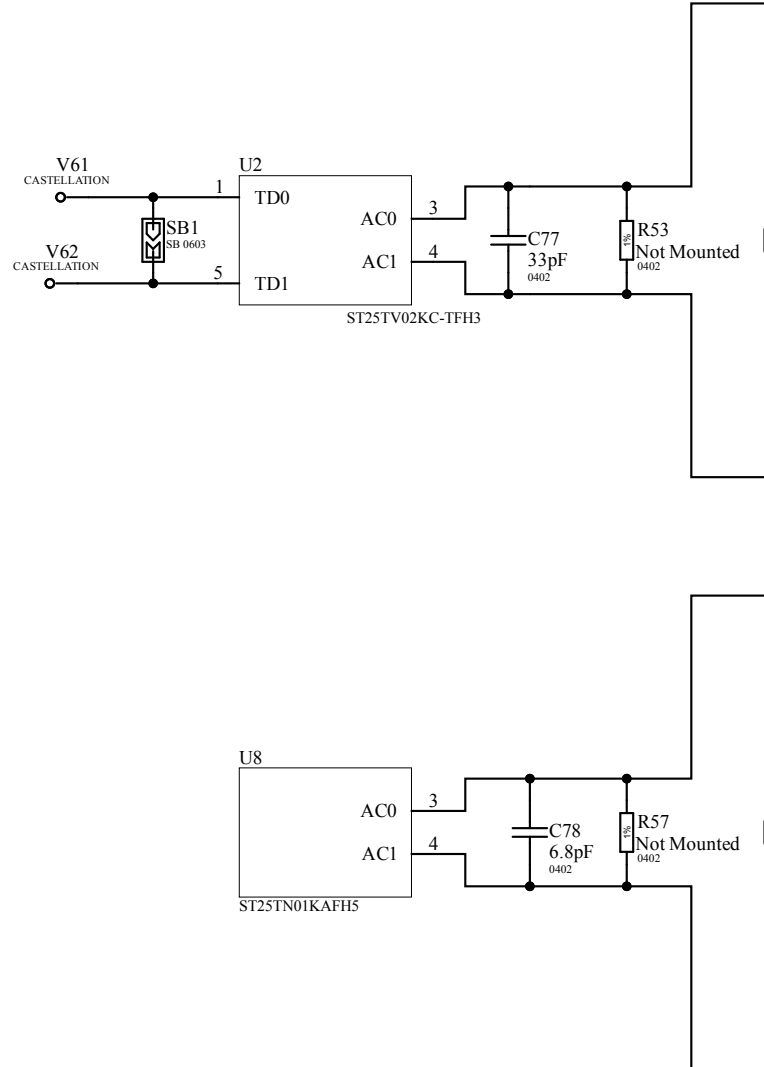

## 2 Kit versions

**Table 1. STEVAL-25R200SA versions**

PCB version	Schematic diagrams	Bill of materials
STEVAL\$25R200SAA <sup>(1)</sup>	STEVAL\$25R200SAA schematic diagrams	STEVAL\$25R200SAA bill of materials

1. This code identifies the STEVAL-25R200SA evaluation kit first version. The kit consists of a STEVAL-25R200A whose version is identified by the code STEVAL\$25R200AA and a STEVAL-FANTR1A whose version is identified by the code STEVAL\$FANTR1AA.

## Revision history

**Table 2. Document revision history**

Date	Revision	Changes
26-Sep-2024	1	Initial release.
02-Oct-2024	2	Updated Cover image.
08-Nov-2024	3	Updated Cover image.
13-Mar-2025	4	Updated Product summary.

**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved