


## VL53L1 Time-of-Flight ranging sensor with programmable field of view and multi-object detection application programming interface (API)

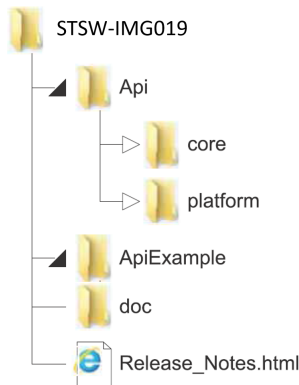

### Features

- VL53L1 API is source code written in C language
- API provides control over full range of features
- API is structured in a way it can be easily ported/compiled on any microcontroller platform
- A simple code example is provided which shows how to use the API to perform ranging measurements with the NUCLEO F401RE and X-NUCLEO-53L1A2 expansion board
- API documentation (.chm and .html) provided

### Description

The VL53L1 API is a set of C functions controlling the VL53L1 device (e.g. init and ranging) to enable the development of end-user applications. The API is structured in a way that it can be compiled on any kind of platform through a well isolated platform layer (mainly for low-level I2C access). One example code is provided to show how to use the API and perform ranging measurements.

The VL53L1 is a state-of-the-art, Time-of-Flight (ToF), laser-ranging, miniature sensor enhancing STMicroelectronics' FlightSense product family. Housed in a miniature and reflowable package, it integrates a SPAD (single photon avalanche diode) array, physical infrared filters and optics to achieve the best ranging performance in various ambient lighting conditions, with a wide range of cover windows.

Unlike conventional IR sensors, the VL53L1 uses ST's latest generation direct ToF technology which allows absolute distance measurement whatever the target color and reflectance. It provides accurate ranging above 8 m and can work at fast speeds (60 Hz), which makes it the fastest miniature ToF sensor on the market.

With patented algorithms and ingenious module construction, the VL53L1 is also able to detect different objects within a field-of-view with depth understanding at 60 Hz.

Scene browsing and multi-zone detection is now possible with the VL53L1, thanks to software customizable detection array for quicker "touch-to-focus" or mini depth-map use cases.

## Revision history

**Table 1. Document revision history**

Date	Version	Changes
29-Apr-2020	1	Initial release
15-Oct-2020	2	Accurate ranging is above 8 m (not 4 m)

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved