


STM32H7S7L8 Amazon Web Services® IoT software expansion for STM32Cube

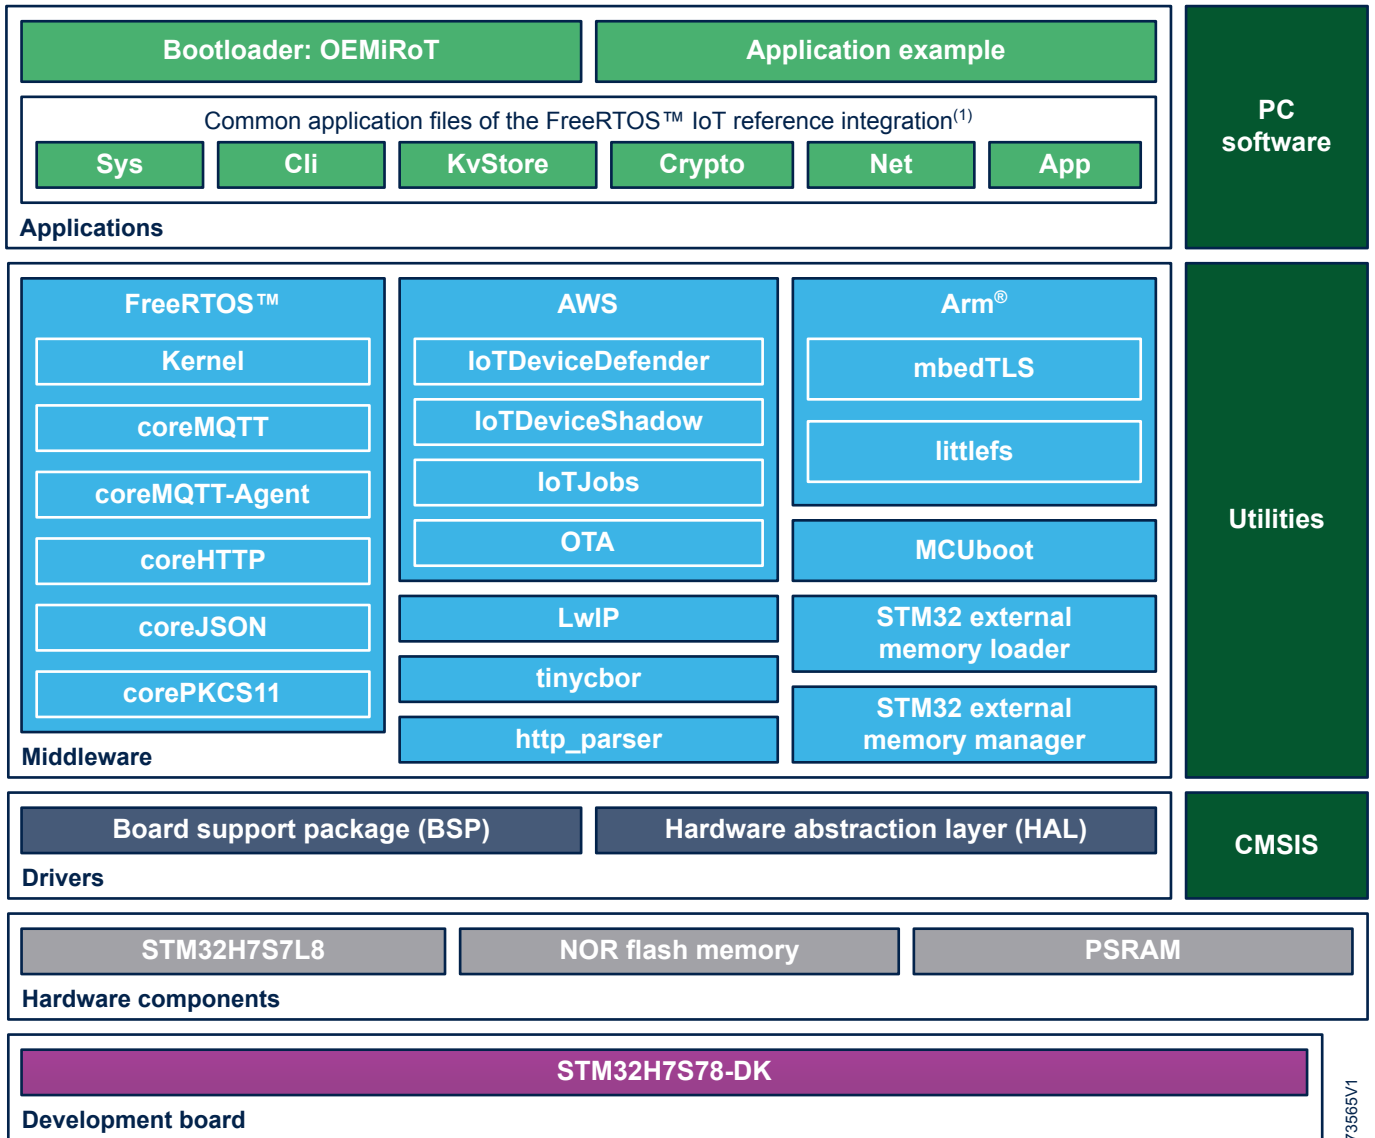

DT73565V1

(1) Files common to the FreeRTOS™ reference integration for B-U585I-IOT02A and to its port to STM32H573I-DK and STM32H7S78-DK.

Product status link

X-CUBE-AWS-H7S



## Features

- Ready-to-run firmware example using Ethernet connectivity to support the quick evaluation and development of Amazon Web Services® cloud-connected applications based on the [STM32H7S7L8](#) microcontroller
- Amazon FreeRTOS™ IoT reference integration for the [STM32H7S78-DK](#) Discovery kit
- Ethernet
- Configurable TCP/IP stack
- TLS encryption
- Secure boot
- Secure firmware update
- Secure storage of private key and user data
- AWS IoT Core™ multi-account registration
- AWS IoT Core™ just-in-time registration (with a user-managed root CA)
- AWS IoT Core™ connection, device shadow, jobs, defender
- AWS IoT Core™ OTA firmware update
- Telemetry
- Command-line interface:
  - Device provisioning
  - Configuration saving to NVM
  - Monitoring of the FreeRTOS™ kernel tasks and their memory usage

## Description

The [X-CUBE-AWS-H7S](#) Expansion Package consists of an adaptation of the Amazon FreeRTOS™ STM32U5 IoT reference integration ported to the [STM32H7S78-DK](#) Discovery kit acting as an end device.

X-CUBE-AWS-H7S proposes an example project that exposes the following functionalities to the user: telemetry, shadows, device defender, jobs, and over-the-air firmware update. The telemetry data consists in the count of the IP packets going in and out of the network interface.

The device credentials and settings are encrypted by a derived hardware unique key (DHUK) and saved in the external flash memory of the [STM32H7S78-DK](#) Discovery kit.

The user application is stored encrypted in the external flash memory, and loaded into the external RAM by the secure bootloader. The traffic to and from the external RAM is encrypted on-the-fly by the MCU hardware, keeping the copy of the user application and data secret to the device.

## 1 General information

The X-CUBE-AWS-H7S Expansion Package is demonstrated on an STM32H7S7L8 32-bit microcontroller based on the Arm® Cortex®-M7 processor.

*Note:* Arm is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.



### 1.1 Ordering information

X-CUBE-AWS-H7S is available for free download from the [www.st.com](http://www.st.com) website.

### 1.2 What is STM32Cube?

STM32Cube is an STMicroelectronics original initiative to improve designer productivity significantly by reducing development effort, time, and cost. STM32Cube covers the whole STM32 portfolio.

STM32Cube includes:

- A set of user-friendly software development tools to cover project development from conception to realization, among which are:
  - STM32CubeMX, a graphical software configuration tool that allows the automatic generation of C initialization code using graphical wizards
  - STM32CubeIDE, an all-in-one development tool with peripheral configuration, code generation, code compilation, and debug features
  - STM32CubeCLT, an all-in-one command-line development toolset with code compilation, board programming, and debug features
  - STM32CubeProgrammer (STM32CubeProg), a programming tool available in graphical and command-line versions
  - STM32CubeMonitor (STM32CubeMonitor, STM32CubeMonPwr, STM32CubeMonRF, STM32CubeMonUCPD), powerful monitoring tools to fine-tune the behavior and performance of STM32 applications in real time
- STM32Cube MCU and MPU Packages, comprehensive embedded-software platforms specific to each microcontroller and microprocessor series (such as STM32CubeH7RS for the STM32H7Rx/7Sx microcontrollers), which include:
  - STM32Cube hardware abstraction layer (HAL), ensuring maximized portability across the STM32 portfolio
  - STM32Cube low-layer APIs, ensuring the best performance and footprints with a high degree of user control over hardware
  - A consistent set of middleware components such as RTOS, FAT file system, TCP/IP, USB Host and Device, USB-PD, OpenBL, external memory loader and manager, and MCUboot
  - All embedded software utilities with full sets of peripheral and applicative examples
- STM32Cube Expansion Packages, which contain embedded software components that complement the functionalities of the STM32Cube MCU and MPU Packages with:
  - Middleware extensions and applicative layers
  - Examples running on some specific STMicroelectronics development boards



## 2 License

---

X-CUBE-AWS-H7S is delivered under the [SLA0048](#) software license agreement and its Additional License Terms.

## Revision history

**Table 1. Document revision history**

Date	Revision	Changes
04-Apr-2024	1	Initial release.

**IMPORTANT NOTICE – READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2024 STMicroelectronics – All rights reserved