


## DIP 18

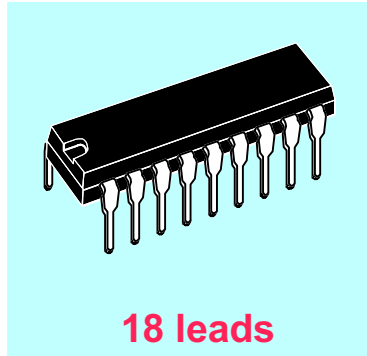


### PACKAGE MATERIAL LIST

item #	material	thickness	thermal conductivity
leadframe	copper	0.25 mm	2.61 W/cm°C
die attach	epoxy glue ( silver filler )	10-40 μm	0.01 W/cm°C
molding compound	epoxy resin	3.6 mm	0.0063W/cm°C

Charts enclosed :

- 1)  $R_{th}(j-a)$  vs power dissipation
- 2)  $Z_{th}(j-a)$  vs time

1)

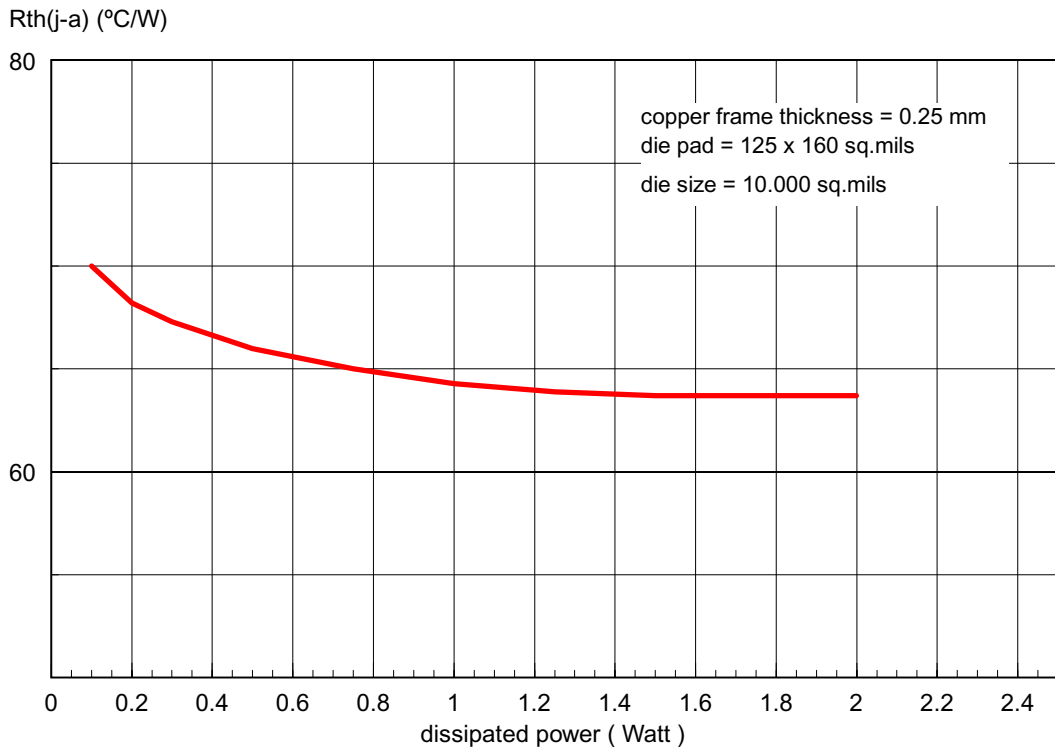

2)

